


TO-220-3L Plastic-Encapsulate Voltage Regulators

CJ7908 Three-terminal negative voltage regulator

FEATURES

- Maximum output current I_{OM} : 1.5 A
- Output voltage V_o : - 8 V
- Continuous total dissipation
 - P_D : 1.5 W ($T_a = 25\text{ }^\circ\text{C}$)
 - 15 W ($T_C = 25\text{ }^\circ\text{C}$)

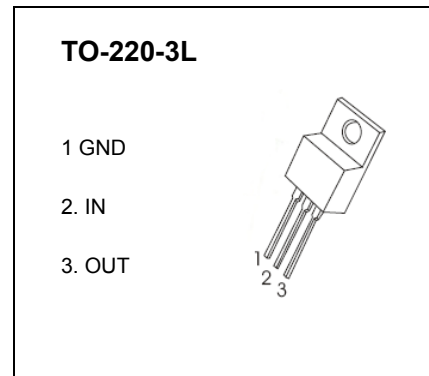

ABSOLUTE MAXIMUM RATINGS(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	-35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	83.3	$^\circ\text{C/W}$
Thermal Resistance from Junction to Case	$R_{\theta JC}$	8.33	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_{OPR}	0~+150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE($V_i=-14\text{V}, I_o=500\text{mA}, C_i=2.2\mu\text{F}, C_o=1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$25\text{ }^\circ\text{C}$	-7.7	-8	-8.3	V
		$-10.5\text{V} \leq V_i \leq -23\text{V}, I_o=5\text{mA}-1\text{A}, P \leq 15\text{W}$	0-125 $^\circ\text{C}$	-7.6	-8	-8.4
Load Regulation	ΔV_o	$I_o=5\text{mA}-1.5\text{A}$	$25\text{ }^\circ\text{C}$	15	160	mV
		$I_o=250\text{mA}-750\text{mA}$	$25\text{ }^\circ\text{C}$	5	80	mV
Line Regulation	ΔV_o	$-10.5\text{V} \leq V_i \leq -25\text{V}$	$25\text{ }^\circ\text{C}$	12.5	160	mV
		$-11\text{V} \leq V_i \leq -17\text{V}$	$25\text{ }^\circ\text{C}$	4	80	mV
Quiescent Current	I_q	$25\text{ }^\circ\text{C}$		1.5	2	mA
Quiescent Current Change	ΔI_q	$-10.5\text{V} \leq V_i \leq -25\text{V}$	0-125 $^\circ\text{C}$		1	mA
		$5\text{mA} \leq I_o \leq 1\text{A}$	0-125 $^\circ\text{C}$		0.5	mA
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$	$25\text{ }^\circ\text{C}$	200		μV
Output Voltage drift	$\Delta V_o / \Delta T$	$I_o=5\text{mA}$	0-125 $^\circ\text{C}$	-0.6		$\text{mV}/^\circ\text{C}$
Ripple Rejection	RR	$-11.5\text{V} \leq V_i \leq -21.5\text{V}, f=120\text{Hz}$	0-125 $^\circ\text{C}$	54	60	dB
Dropout Voltage	V_d	$I_o=1\text{A}$	$25\text{ }^\circ\text{C}$	1.1		V
Peak Current	I_{pk}		$25\text{ }^\circ\text{C}$	2.1		A

TYPICAL APPLICATION

