


REV. V

DIMENSIONS ARE IN INCHES		TOLERANCES ARE:		TITLE:	DWG NO:
ONE PLACE DECIMALS ± .1	THREE PLACE DECIMALS ± .005	FOUR PLACE DECIMALS ± .0020	ANGLES ± 2°	DUAL ROW .050 x .050 STRIP ASSEMBLY	FLE-1XX-XX-XX-DV-X
				SHEET 1 OF 2	

DO NOT SCALE FROM THIS PRINT

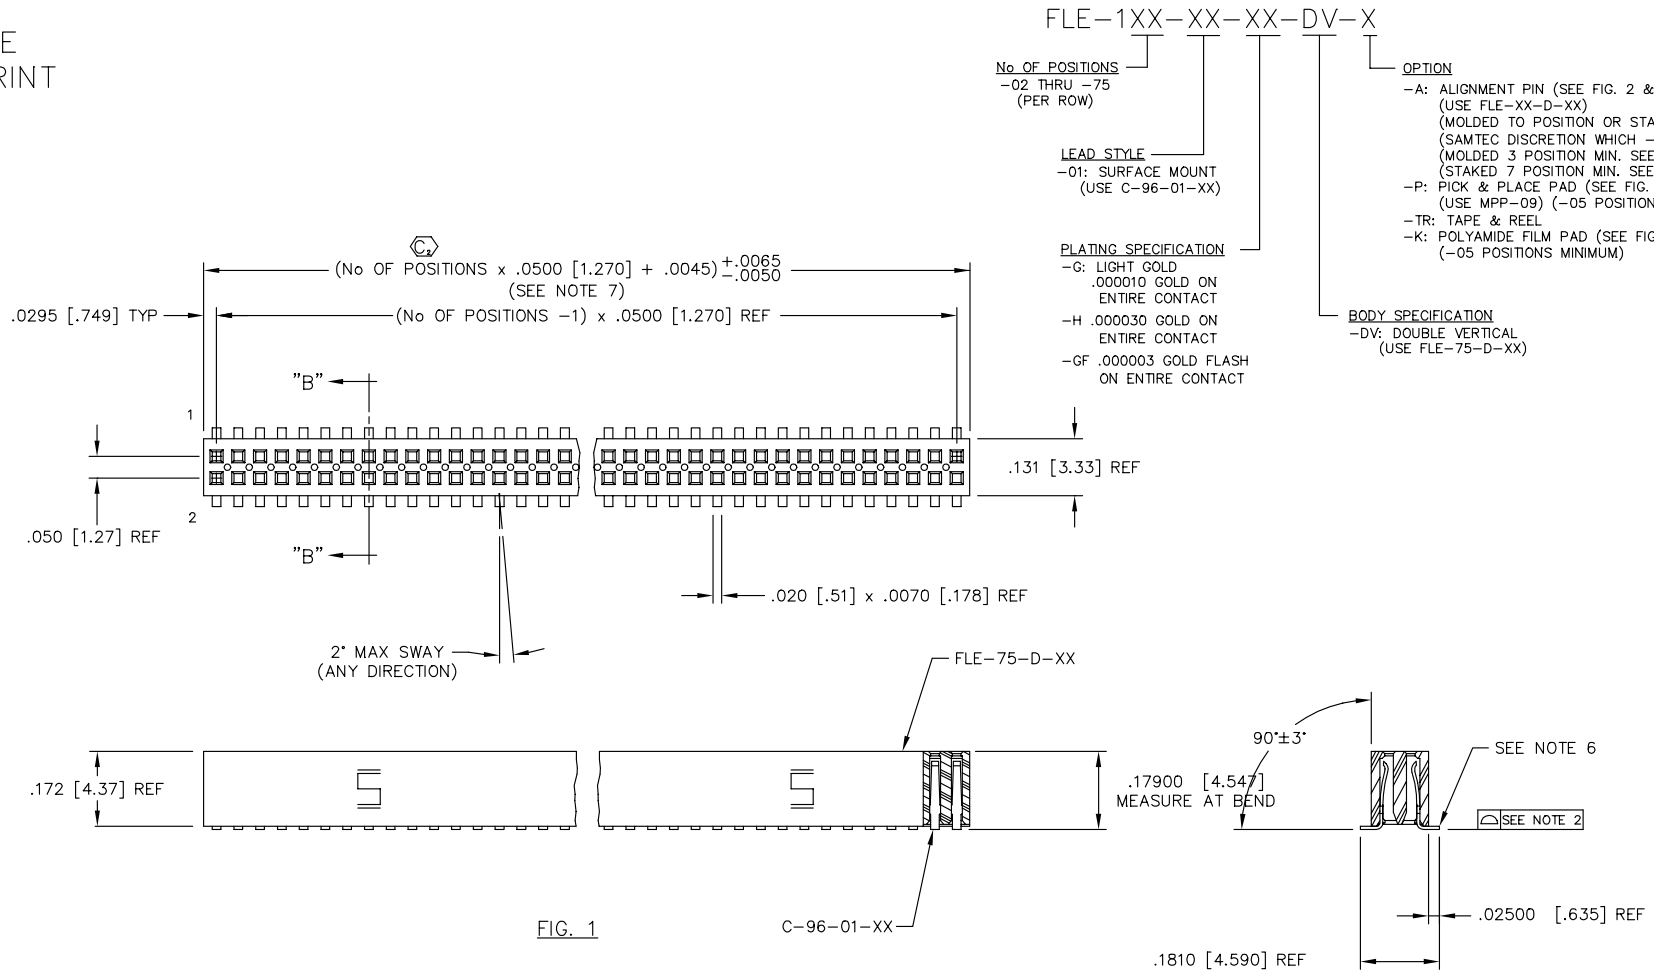

- FLE-1XX-XX-XX-DV-X
- No. OF POSITIONS**
 - 02 THRU -75 (PER ROW)
 - LEAD STYLE**
 - 01: SURFACE MOUNT (USE C-96-01-XX)
 - PLATING SPECIFICATION**
 - G: LIGHT GOLD .000010 GOLD ON ENTIRE CONTACT
 - H .000030 GOLD ON ENTIRE CONTACT
 - GF .000003 GOLD FLASH ON ENTIRE CONTACT
 - OPTION**
 - A: ALIGNMENT PIN (SEE FIG. 2 & 3, SHT. 2) (USE FLE-XX-D-XX) (MOLDED TO POSITION OR STAKED) (SAMTEC DISCRETION WHICH -A PIN IS USED) (MOLDED 3 POSITION MIN. SEE FIG. 2, SHT. 2) (STAKED 7 POSITION MIN. SEE FIG. 3, SHT. 2)
 - P: PICK & PLACE PAD (SEE FIG. 4, SHT. 2) (USE MPP-09) (-05 POSITIONS MINIMUM)
 - TR: TAPE & REEL
 - K: POLYAMIDE FILM PAD (SEE FIG. 6, SHT. 2) (-05 POSITIONS MINIMUM)
 - BODY SPECIFICATION**
 - DV: DOUBLE VERTICAL (USE FLE-75-D-XX)

- NOTES:
1. MINIMUM PUSHOUT FORCE: .5 lb.
 2. COPLANARITY; POS -5 THRU -26: .004
POS -27 THRU -75: .006
 3. (C) REPRESENTS A CRITICAL DIMENSION.
 4. PACKAGE POSITIONS -05 THRU -75 IN TUBES; LAYER PACKAGE POSITIONS -02 THRU -04.
 5. FOR EVERY FINISHED PART, ONE POSITION WILL BE LOST WHEN CUTTING BODY TO LENGTH.
 6. BURR ALLOWANCE: .003 [.08] MAX.
 7. CUT FLASH TO BE .010 [.25] MAX WITH NO FLASH ALLOWED IN HOLES OR EXTENDING BELOW LEADS.

SECT. "B-B"

PLOT SCALE: .175/ DIMSCALE: .200

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: D PURVIS 11-05-96 FLE-1XX-XX-XX-DV-X
SHEET 1 OF 2

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.