


# Surface Mount Saturable Reactor

PARAMETER	TYP.	UNITS
Inductance <sup>1</sup> (No DC)	600	$\mu\text{H}$
DCR	40	$\text{m}\Omega$
ET Rating	4	$\text{V}\mu\text{s}$
<sup>1</sup> Inductance tested at 100mV RMS 10 kHz (0 ADC)		

## PHYSICAL DIMENSIONS inches (mm)

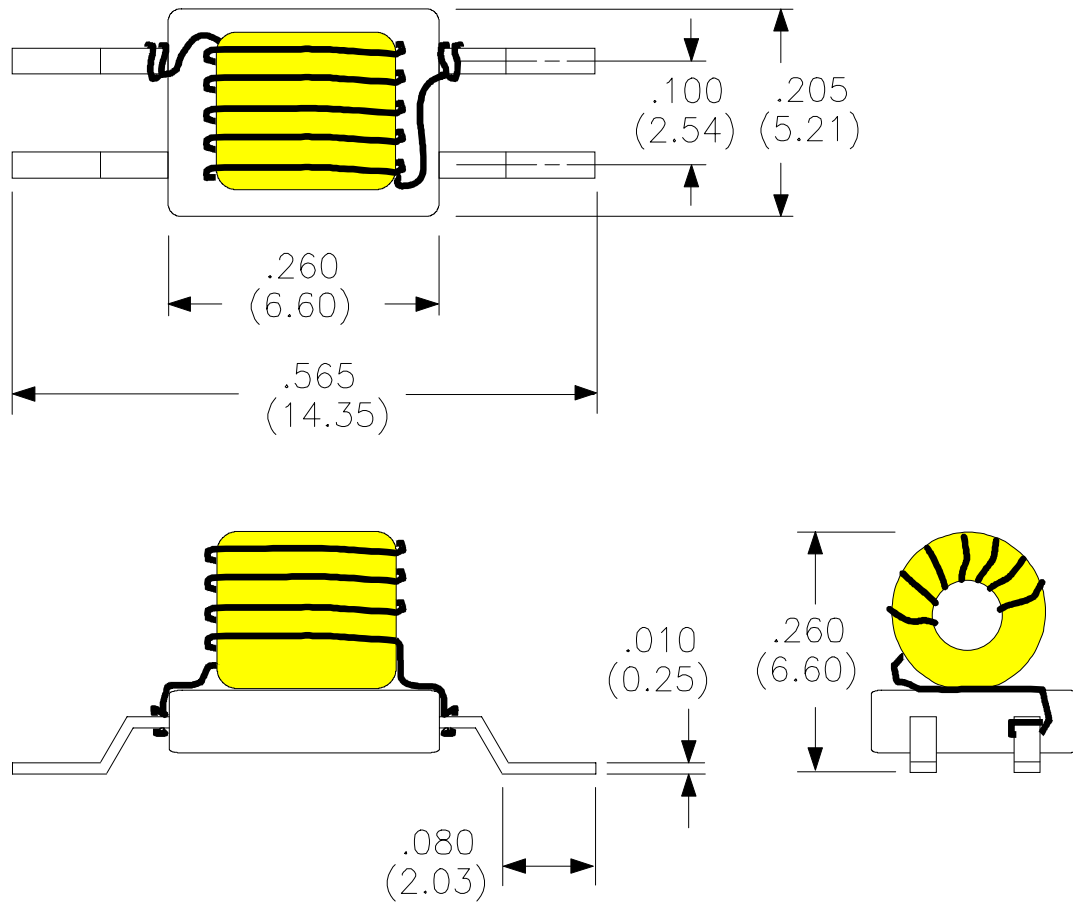

**CORE: TOSHIBA AB3X2X3W**  
**MOUNT: Loadstone Pacific STM-255-4**  
**WIRE: 30AWG MW-28 OR MW-80**  
**TURNS: 8 TURNS**

## **RHOMBUS INDUSTRIES INC.** **FSCM NO. 16714**

RHOMBUS P/N: **L-275**

CUST P/N:

NAME: **ADTRAN**

DATE: **8/07/95**

SHEET: **1 OF 1**