
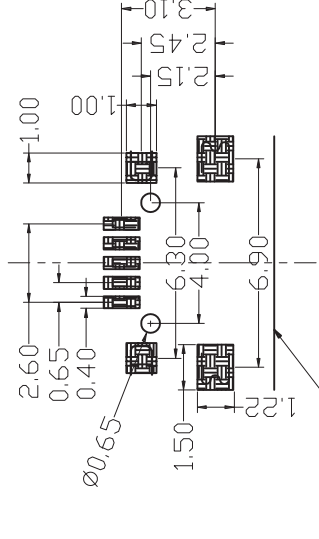






REV.	DESCRIPTION	DRAWN/DATE	APPROVED/DATE



**NOTES:**

- MATERIAL:
  - HOUSING:THERMOPLASTIC FLAMMABILITY RATING UL94-0
  - CONTACT:COPPERY ALLOY T=0.15MM
  - SHELL: COPPERY ALLOY T=0.25MM
- FINISH:
  - CONTACT:
    - 3U"MIN,PLATED ON CONTACT AREA
    - G/F PLATING ON SOLDER TAIL AREA
    - 50~80U" NICKEL UNDERPLATING OVERALL
  - SHELL:
    - 80~120U" MATTER TIN PLAING ALL
    - 50~80U" NICKEL UNDERPLATING OVERALL
- SPECIFICATION:
  - CURRENT RATING:0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT)MAX.
  - VOLTAGE:30 VAC
  - TEMPERATURE RANGE:-30°C~85°C
  - CONTACT RESISTANCE:30 MILLIONHM MAX.
  - DIELECTRIC WITHSTANDING VOLTAGE:250VAC R.M.S
  - INSULATION RESISTNAGE:100 MEGOHMS MIN

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE
X. ±0.35 .X. ±0.25 .XX ±0.15 .XXX ±0.10	X. ±2.0° .X. ±1.0° .XX ±0.5° .XXX ±0.10	ZQL	ZQL
UNIT:mm	SCALE 1:1	CHECK ZQL	APPRO. DATE
A4	SHEET: 1 of 1		
DEALON ELECTRONICS CO.,LTD			
FILE NAME(??)	PART NO(??)	MICRO USB 5PIN TYPE DIP SMT	
		USB-MR-D-032	
DRAWING NO(??)		REV. AO	