
Lightning Surge Protectors for Electronics Equipment M-RESTER

SURGE ABSORBER ELEMENT

(For MAX use)

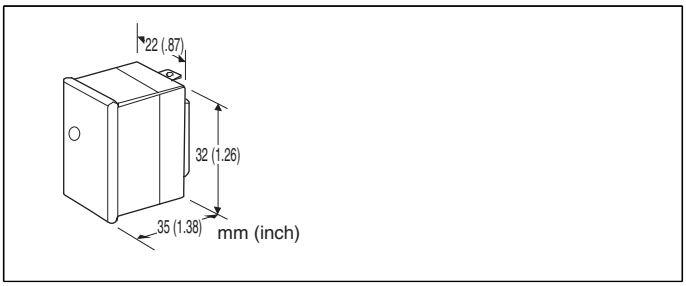

MODEL: MEL-[1]

ORDERING INFORMATION

• **Code number**: MEL-[1]
Specify a code from below for [1].
(e.g. MEL-100)

[1] OPERATIONAL VOLTAGE

100: 100 V / 110 V / 120 V AC
200: 200 V / 220 V / 240 V AC


GENERAL SPECIFICATIONS

Alarm indicator: Surge absorber failure indicator turns white when the fuse is blown.
Alarm Contact: Contact output when a fuse blows out to prevent fires (ON when abnormality occurs)


INSTALLATION

Operating temperature: -10 to +55°C (14 to 131°F)
Storage temperature: -10 to +65°C (14 to +149°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Weight: 25 g (0.88 oz)

DIMENSIONS unit: mm (inch)

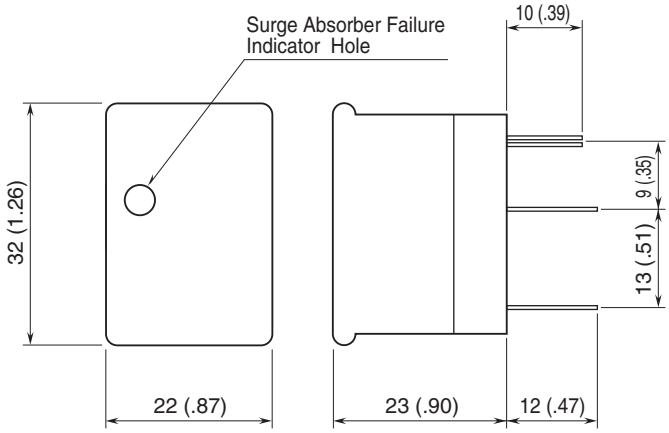

SCHEMATIC CIRCUITRY

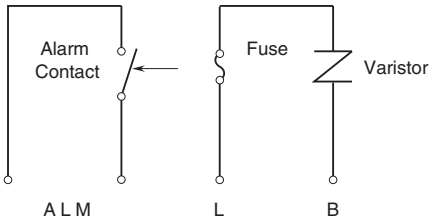

⚠ Specifications are subject to change without notice.