
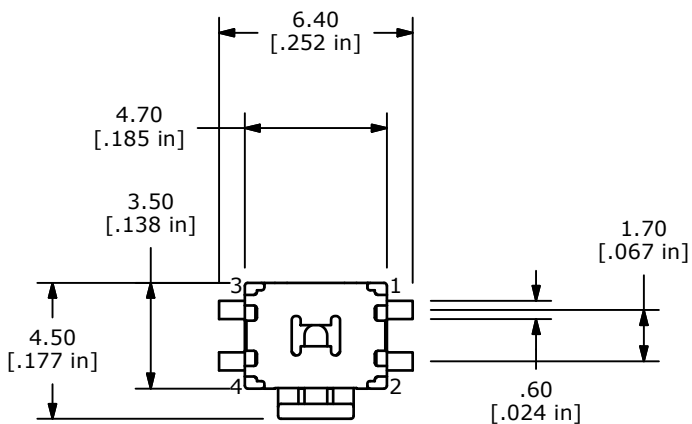
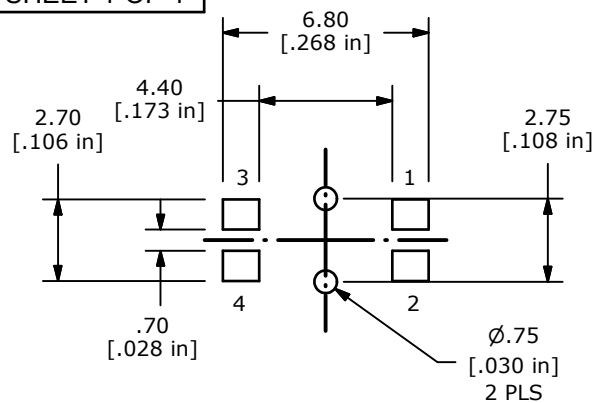


CIRCUIT: SPST

## NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲5. OPERATING FORCE: 220 ±50 gms
- ▲6. TRAVEL: 0.3mm +0.1/-0.2
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
9. PACKAGE: TAPE AND REEL - 3300 PIECES PER REEL
10. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT.

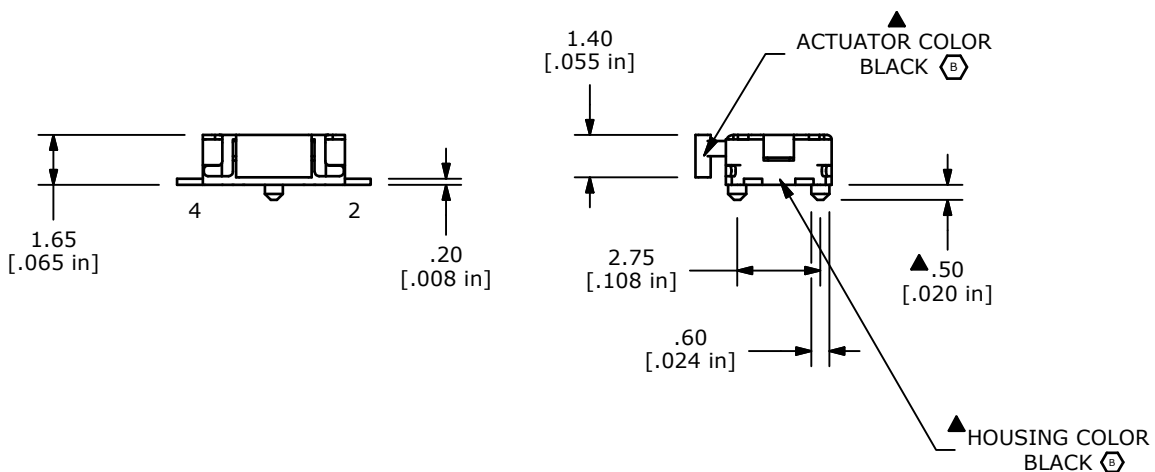

TITLE TL1014BF220QG

|     |        |                              |          |    |
|-----|--------|------------------------------|----------|----|
| B   | 21620  | CHG MATERIAL COLORS TO BLACK | 10/14/14 | AS |
| A   | 20976  | New Release                  | 1/18/13  | rc |
| REV | PCR NO | DESCRIPTION                  | DATE     | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|       |                   |          |                |          |
|-------|-------------------|----------|----------------|----------|
| SCALE | DATE<br>1/18/2013 | DR<br>rc | DWG<br>P410003 | REV<br>B |
|-------|-------------------|----------|----------------|----------|