



**FEATURES:**

- AC-DC Constant current LED Driver
- Input range 90-277VAC/47-440Hz
- High Efficiency up to 91%
- Operating temperature -40 to 85°C
- Over Temperature Protection
- Waterproof Case rated IP68
- Power Factor Correction
- SCP, Over Current Protection



**Models**  
**Single output**

Model	Max Output Power (W) *	Output Voltage Range (V)	Output Current (A)	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Efficiency (%)
AMER120-50250AZ	125	36-50	2.5	90-277/47-440	120-390	91
AMER120-36340AZ	122.4	24-36	3.4	90-277/47-440	120-390	90
AMER120-24500AZ	120	12-24	5	90-277/47-440	120-390	90

\*Exceeding the maximum output power will permanently damage the converter

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

**Input Specifications**

Parameters	Conditions	Typical	Maximum	Units
Inrush current <2ms	115VAC	45		A
	230VAC	60		
Leakage current	115VAC	0.5		mA
	230VAC	0.75		
AC current	115VAC	1.8		A
	230VAC	0.7		
Power Factor	115VAC		0.98	
	240VAC		0.94	
External fuse			250V/3A	
Start up time		400		ms
Surge voltage	2sec		440	V

**Output Specifications**

Parameters	Conditions	Typical	Maximum	Units
Current accuracy		±3		%
Line regulation	LL-HL	±1		%
Load regulation	0-100% load	±3		%
Ripple & Noise *	20MHz Bandwidth	75		mV p-p
Hold-up time		80		ms
Current adjustment range		100-0		%
Minimum Load Voltage	See the models table			

\* Tested with 0.1µF (M/C) or (C/C) and 47µF (E/C) parallel capacitors at the end.

**Isolation Specifications**

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	3sec/3.2mA		3000	VAC
Isolation Resistance	500VDC	>1000		MΩ
Isolation Capacitance		1000		pF


### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency		100		KHz
Over current protection		110% of Iout		
Over voltage protection		110% of Vout		
Short circuit protection		Continuous		
Short circuit restart		Auto recovery		
Over temperature protection		>105°C		
Operating temperature	With derating over 55°C	-40 to +85		°C
Maximum case temperature			100	°C
Storage temperature		-40 to +95		°C
Temperature coefficient		±0.02		% / °C
Cooling	Free air convection			
Humidity			95	% RH
Case material	Aluminum			
Potting	Epoxy (IP67 rated)			
Wires	UL1015 18AWG Input & 14AWG output *20CM			
Weight		750		g
Dimensions (L X H X W)	7.13 x 2.32 x 1.85 inches	181.00 x 59.00 x 47.00 mm		
MTBF	>400,000 hrs (MIL-HDBK-217F at +25°C)			

### Safety Specifications


Parameters	
Agency approvals	cULus , CE
Standards	UL8750, UL60950-1, EN55022, class B, EN60529(IP68), EN61347-1, EN61347-2-13

### Dimensions

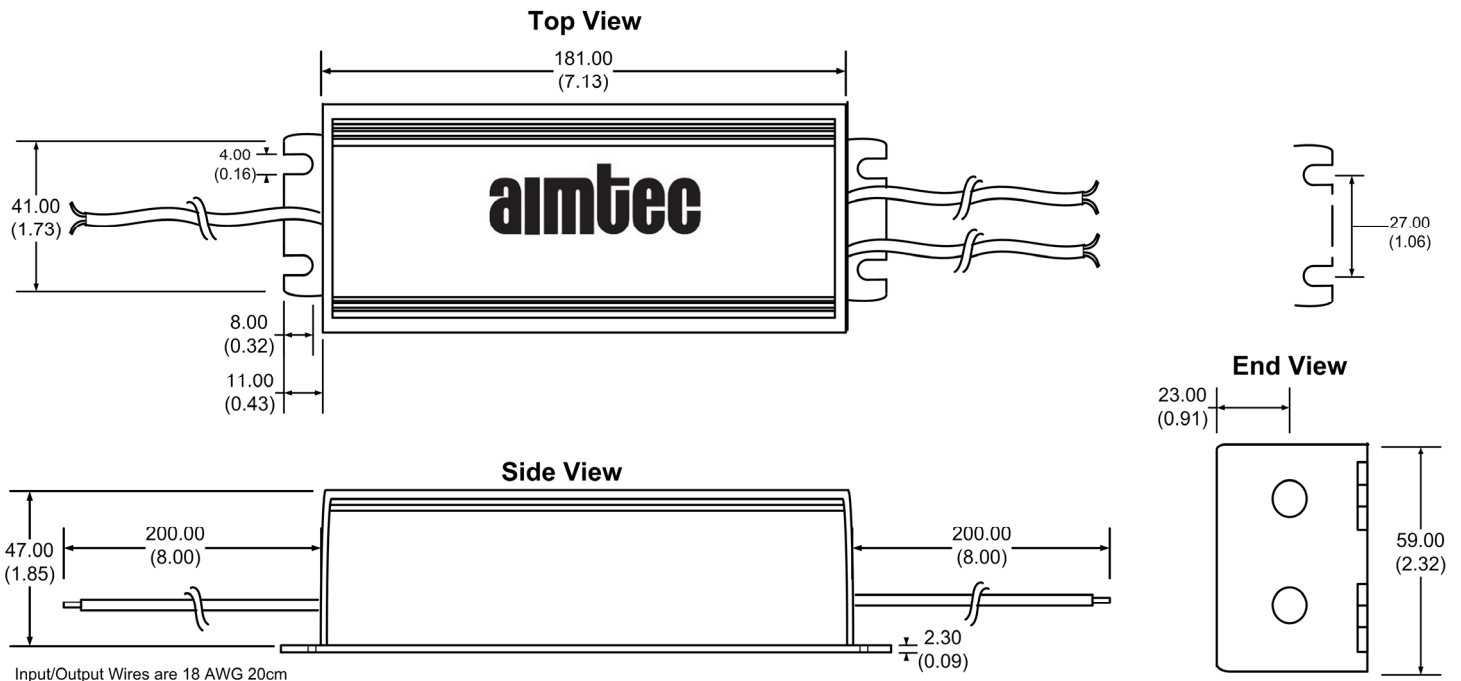


Measurements in Millimeters (inch)  
Case Tolerance: ±0.5 (±0.02)

### Application Circuit

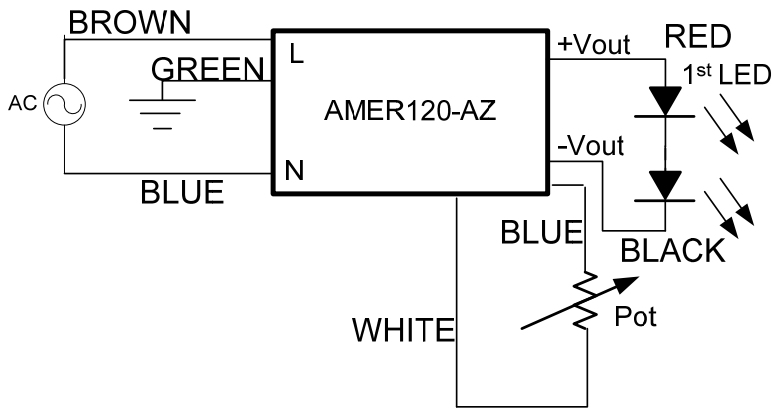


Model Number	Maximum Pot Value (kΩ)
AMER120-50250AZ	31.75
AMER120-36340AZ	25.00
AMER120-24500AZ	26.00

### Temperature graph

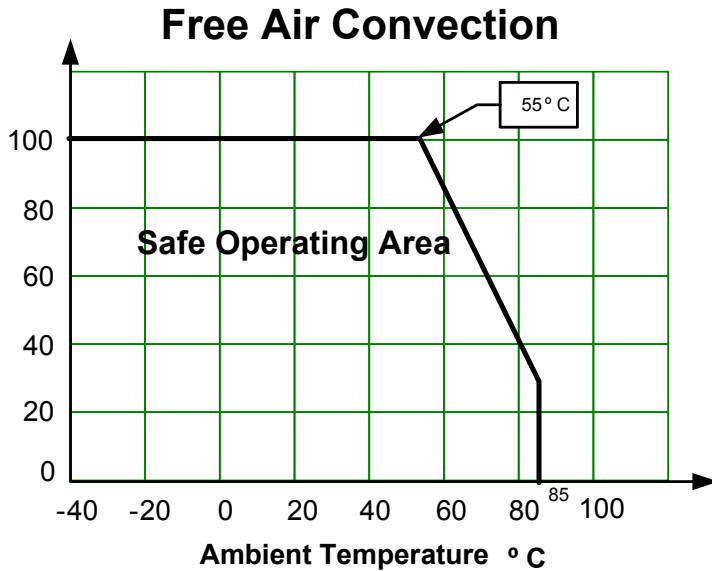


**Efficiency vs. Input Voltage and Output Current (CC Load)**

AMER120-50250AZ

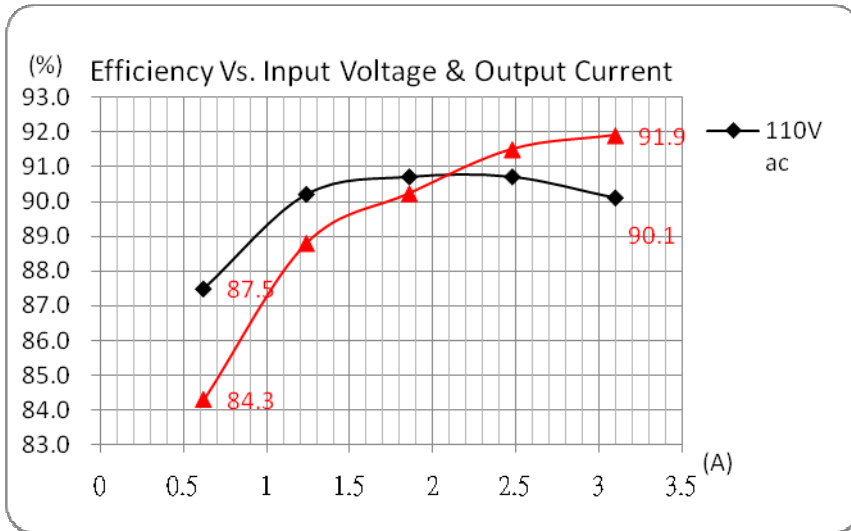


AMER120-36340AZ

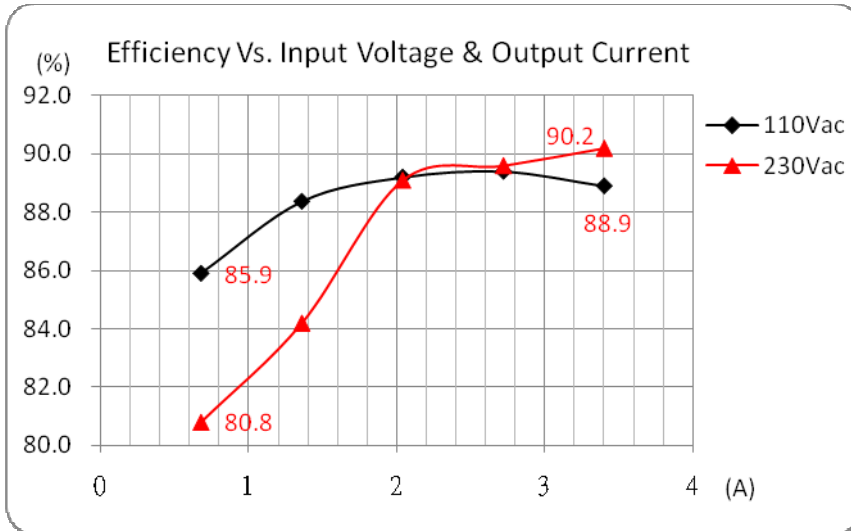


**Efficiency vs. Input Voltage and Output Current (CC Load)  
Continued**

AMER120-24500AZ

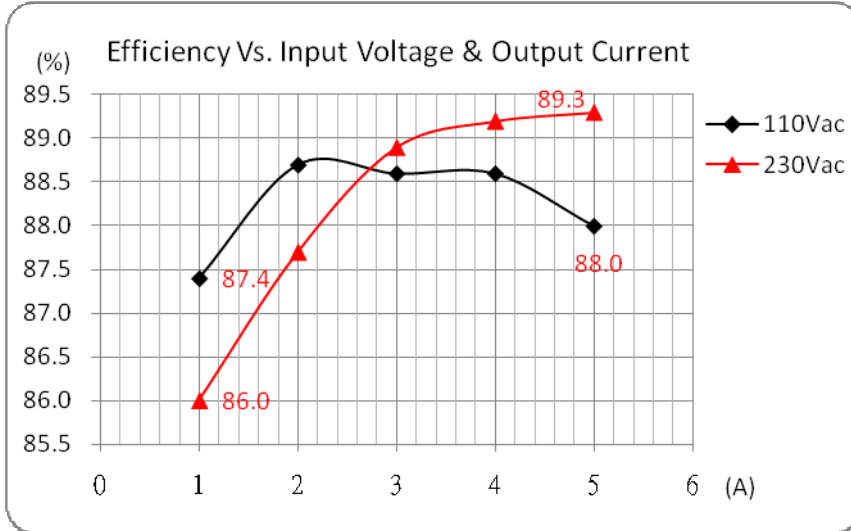


**PFC Value vs. Output Load Current (CC Load)**

AMER120-50250AZ

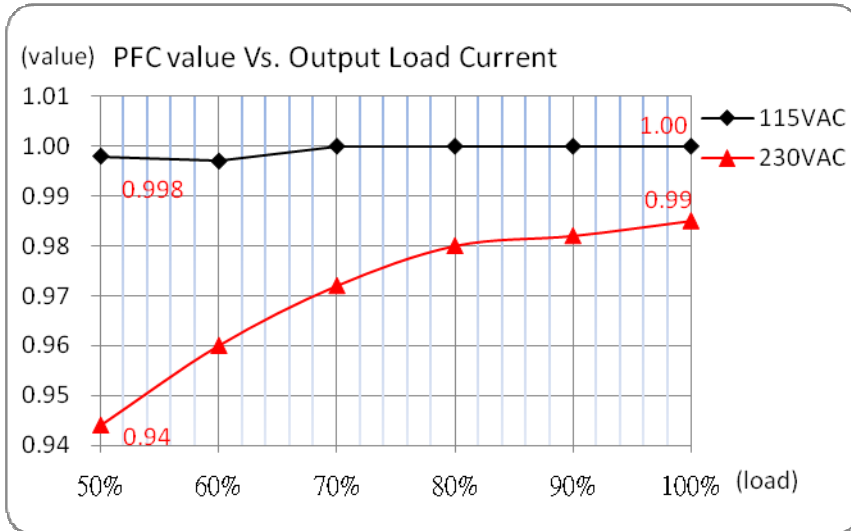


**PFC Value vs. Output Load Current (CC Load)**  
Continued

AMER120-36340AZ

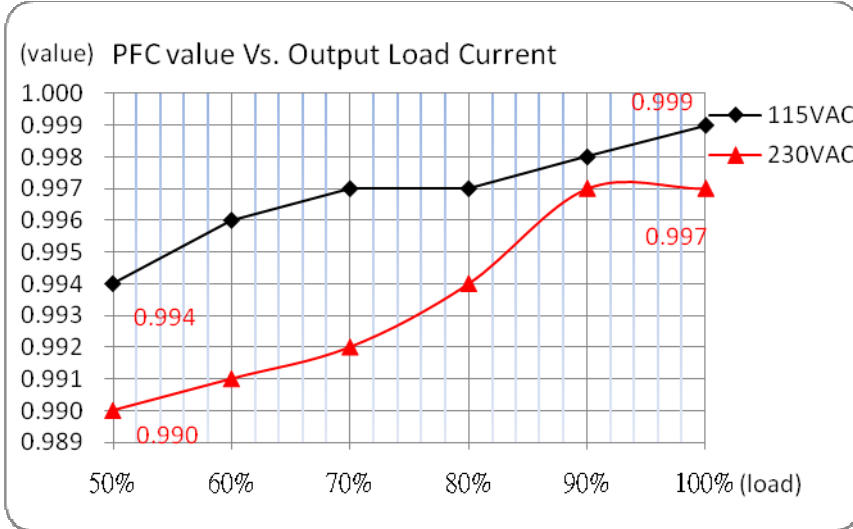


AMER120-24500AZ

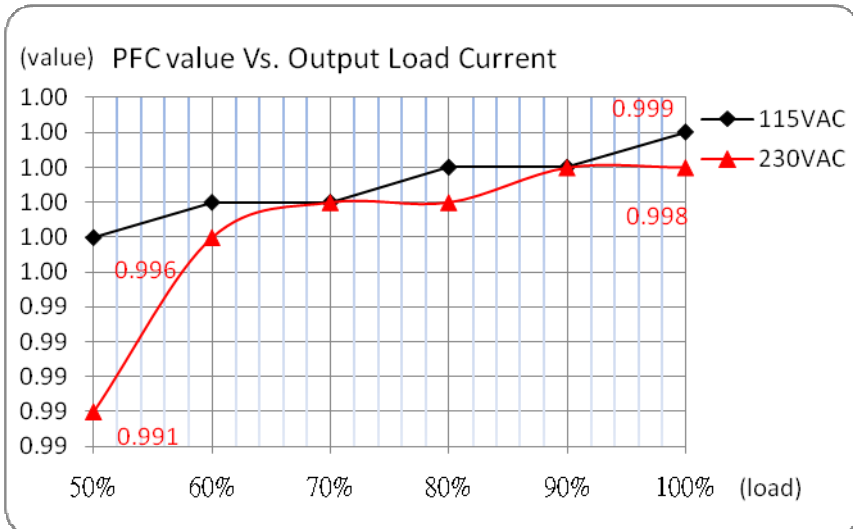


**Constant Current Mode vs. Constant Voltage Mode**

AMER120-50250AZ

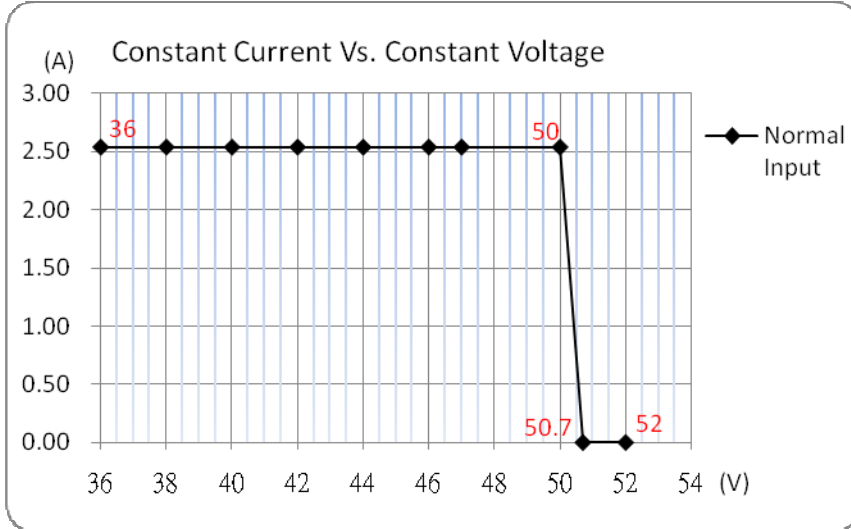


AMER120-36340AZ

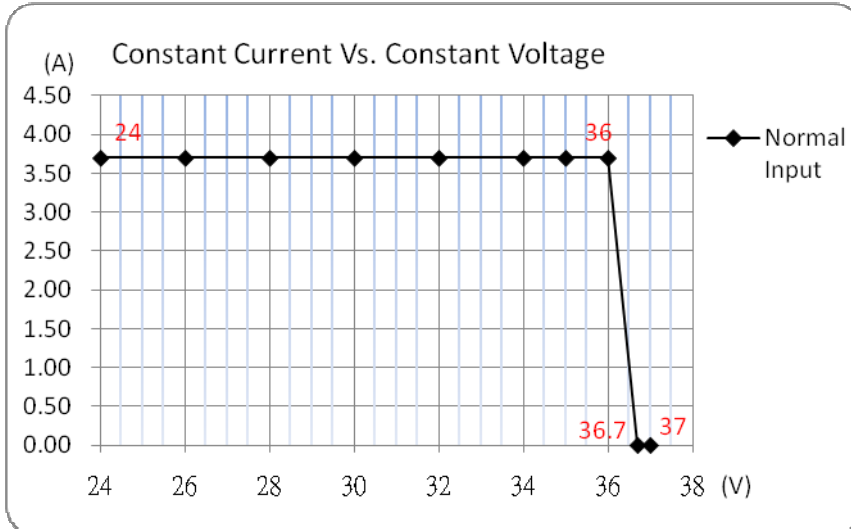


**Constant Current Mode vs. Constant Voltage Mode  
Continued**

AMER120-24500AZ

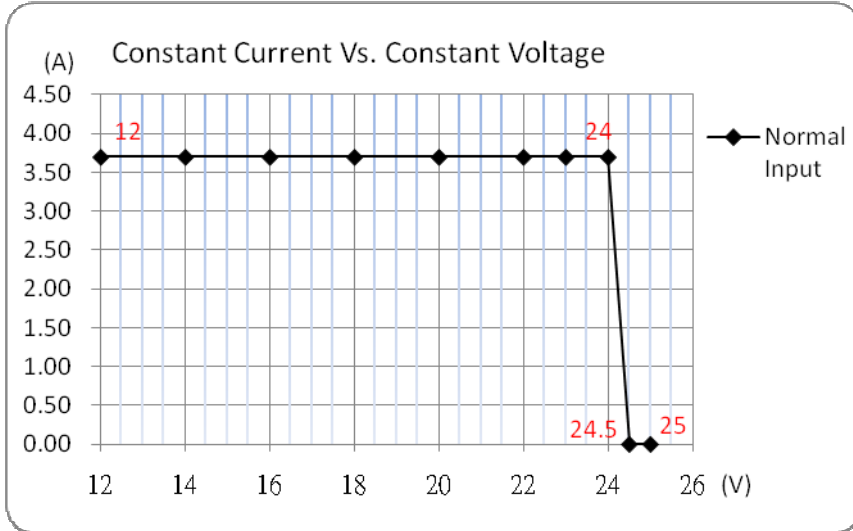

**Output Current vs. Radj**


AMER120-50250AZ

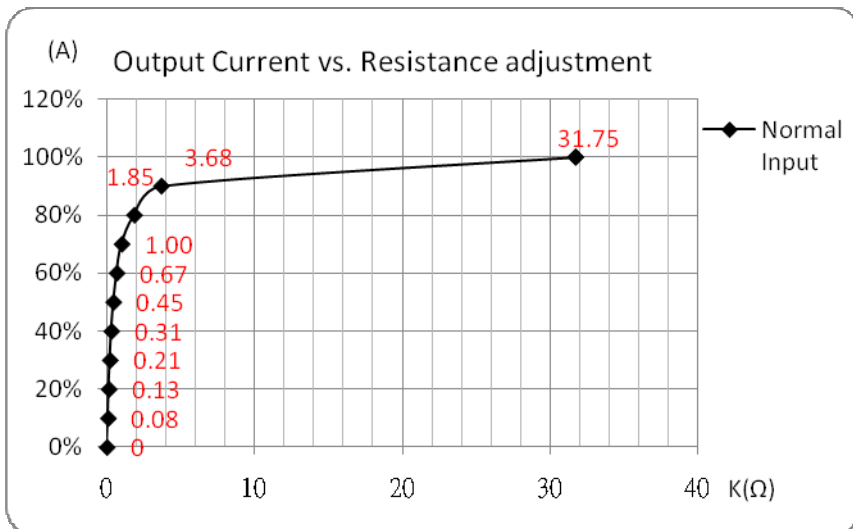




**Output Current vs. Radj  
Continued**

AMER120-36340AZ

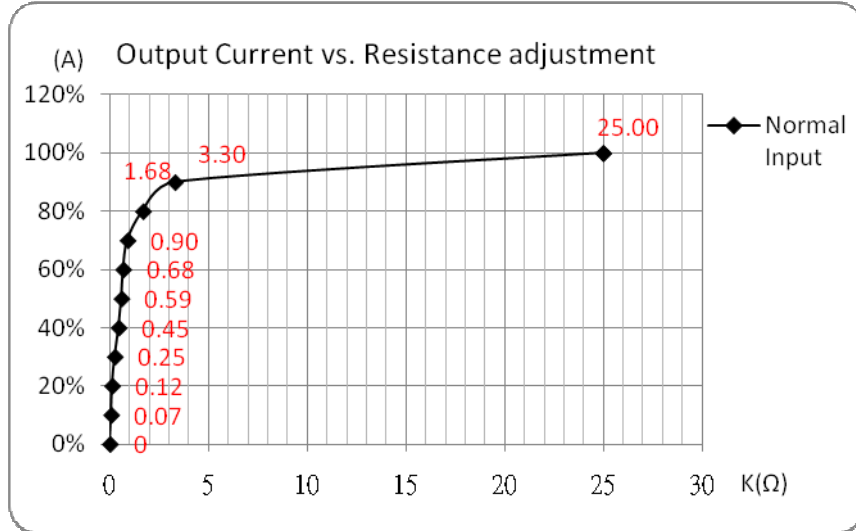

AMER120-24500AZ

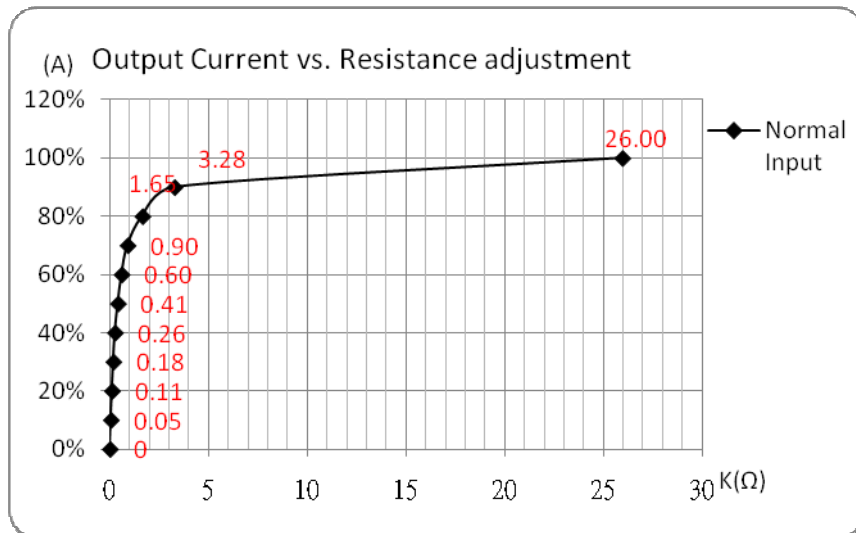

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).