
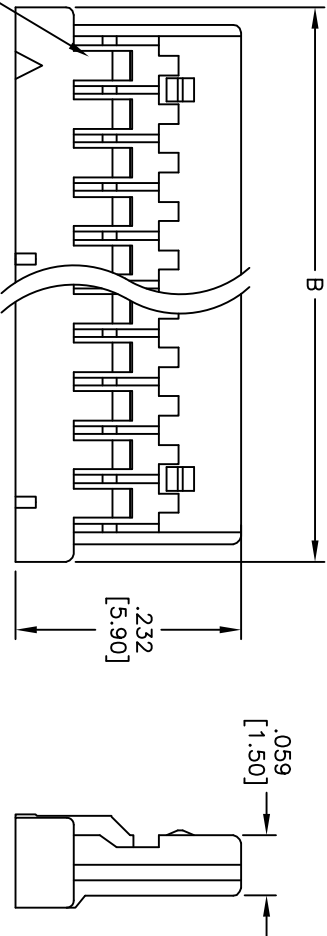


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/11/08	
A		REVISED SHAPE	11/18/10	

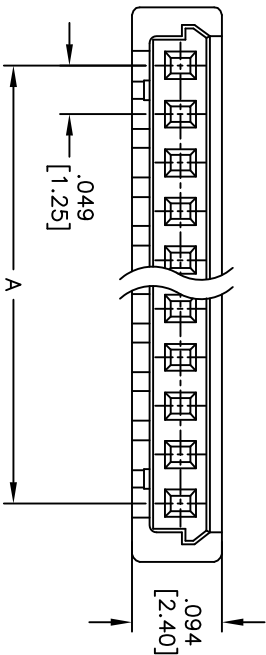

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Electrical:

Voltage rating: 100 VAC/DC max

Current rating: 1 Amp max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



Positions: 2 thru 10, 12, 15, 20, 25, 30
A =.049 [1.25] X NO. OF POSITIONS -1
B =.049 [1.25] X NO. OF POSITIONS + .077 [1.95]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES				1.25mm CRIMP HOUSING SINGLE ROW			
HOLES				2 THRU 30 POSITIONS			
X .10 ± .10 ØX ± .10				TITLE			
.XX ± .020 ØXX ± .015				125CH-D-XX			
.XXX ± .015 ØXXX ± .010				PART NO.			
APPROVALS				SCALE: NTS			
DATE				SHEET 1 OF 1			
DRAWN SS 11/11/08				REV. A			
CHECKED				SIZE X			
APPROVED				REF: S00123T			