


PIN	A	B	C
1	6.85	0.00	6.00
2	9.85	3.00	9.00
3	12.85	6.00	12.00
4	15.85	9.00	15.00
5	18.85	12.00	18.00
6	21.85	15.00	21.00
7	24.85	18.00	24.00
8	27.85	21.00	27.00
9	30.85	24.00	30.00
10	33.85	27.00	33.00
11	36.85	30.00	36.00
12	39.85	33.00	39.00

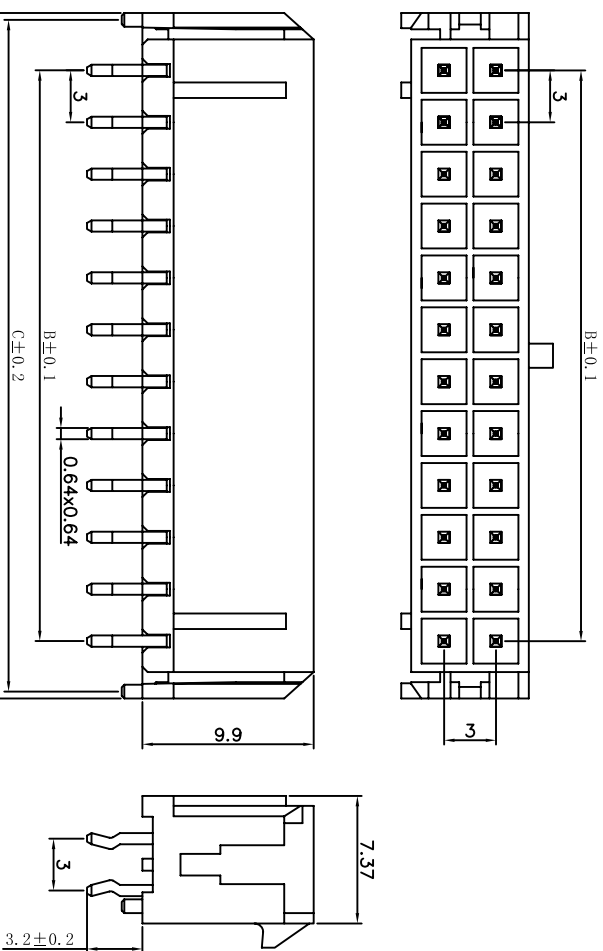

P.C.B Layout

一. 电气性能:

- 1-1. 额定电流: 3A AC DC.
- 1-2. 接触电阻: $\leq 20m\Omega$
- 1-3. 绝缘电阻: $\geq 1000M\Omega$
- 1-4. 耐压: 550V AC/Minute

二. 物理特性:

- 2-1. 操作温度: $-55^{\circ}C \sim 105^{\circ}C$
- 2-2. 焊接温度: $+240^{\circ}C$, 8s max

三. 材质:

- 3-1. 塑胶: PA46 (Black) UL94V-0
- 3-2. 插针: Brass/Gold plated

图名: WFP3.0-2xNAS		图号: XXXXXXXXXXXXXXXXXXXX	
XX.	± 0.40	XX.°	$\pm 2^{\circ}$
X.	± 0.30	.XX°	$\pm 1^{\circ}$
.XX	± 0.20		
.XX	± 0.15		
未标注公差			
绘制:	韩金锋	单位:	MM
签发:		比例:	1:1
审核:		视图:	