

XRCHH36M000F1QA3E2


In Production

RoHS

REACH

< List of part numbers with package codes >
XRCHH36M000F1QA3E2

Appearance & Shape

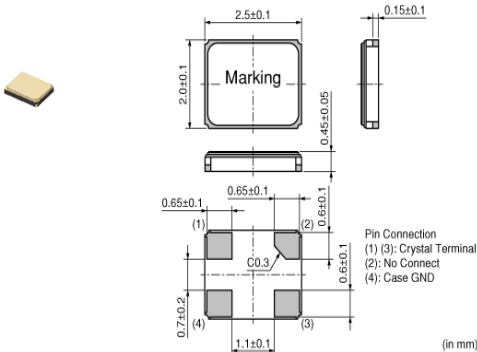

Features

With unique metal sealing technology, this product realizes an excellent frequency stability over temperature and small size package. They are suitable for various types of digital communication equipment.

Applications

Other Usage	Industrial
-------------	------------

Packaging Information

Packaging	Specifications	Minimum Order Quantity
E2	180mm Plastic Tape	3000

Attention
1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

XRCHH36M000F1QA3E2



Specifications

Shape	SMD
Frequency	36.0000MHz
Frequency Tolerance	±10ppmmax. (25±3°C)
Operating Temperature Range	-30°C to 85°C
Frequency Shift by Temperature	±15ppmmax.
Frequency Aging	±1ppmmax./year(±3ppm max./5years)
Wash	Not available
Load Capacitance	8pF
Equivalent Series Resistance(Max.)	60Ω
Drive Level(Max.)	60μW

Attention
 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products n it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 2.This datasheet has only typical specifications because there is no space for detailed specifications.
 Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.