
TERMINAL BLOCKS

5mm PITCH VERTICAL MOUNT


- 5.00mm pitch
- Professional rising clamp - Designed to prevent cable entry below clamp
- 2.5mm² wire acceptance
- Rating 20A/250V
- UL/CE approved
- Colour green
- Interlocking

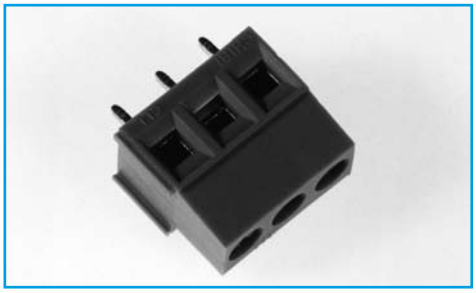

SPECIFICATION

Rating:	20A/250Volts
Dielectric Strength:	>2.5KV
Insulation Resistance:	>5MΩ
Working temperature:	-20°C to 125°C
Short Period:	160°
Moulding:	UL94V-0 flame retardant nylon 66
Pin/terminal:	5 micron tinned nickel plated brass
Rising clamp:	Nickel plated brass
Screw/torque:	M3 Zinc Steel / 0.2Nm, colour passivated and tropicalised
Recommended PCB hole size:	ø1.3mm²

OUTLINE DRAWING

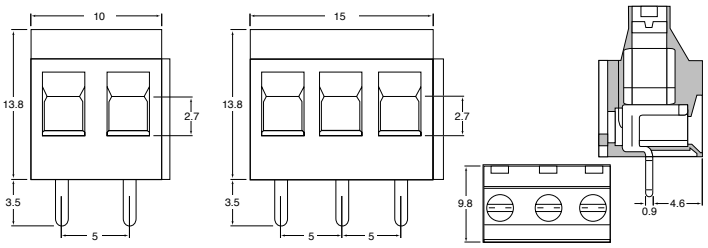


ORDERING INFORMATION

DBC	TB	16	/2
Dubilier Connectors	Series Terminal Block	Style	Nº of Ways 2 = 2 ways 3 = 3 ways

TERMINAL BLOCKS

5MM PITCH RISING CLAMP

- 5mm Pitch
- Professional Rising Clamp
- 2 -12 pole interlocking
- 2.5mm2 wire acceptance
- UL/CE/VDE approved
- Colour Green

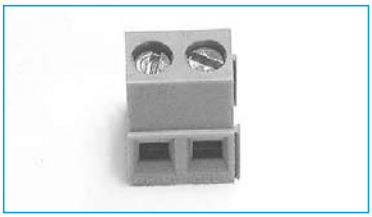


SPECIFICATION

Electrical Characteristics

Rating Current:	20A/250V
Contact Resistance:	≥2.5kV/60secs
Insulation Resistance:	≥5MΩ
Operating Temperature:	-20°C to +125°C
Short period:	160°C
Moulding:	UL94-V0 flame retardant PA66
Pin/terminal:	5µ tinned, nickel plated brass
Wire clamp:	Nickel plated brass
Screw/torque:	M3 steel, 6µ zinc colour passivated and tropicalised/0.5Nm
Recommended PCB hole size:	ø1.3mm

OUTLINE DRAWING



ORDERING INFORMATION

DBC	TB	42	/2
Dubilier Connectors	Series Terminals Blocks	Style	No of Ways 2 = 2ways 3 = 3ways * other number of ways are available Please consult the office for further details