


## ■ Switching Diodes

### ■ Features


- Small plastic SMD package.
- High switching sped: max.4 ns.
- Repetitive peak forward current: max.450 mA.



### ■ Simplified outline(SOT-23)

### ■ Marking

Marking	A4
---------	----



### ■ Absolute Maximum Ratings Ta = 25°C


Parameter	Symbol	Rating	Unit
Repetitive peak reverse voltage	V <sub>R</sub> <sub>RM</sub>	85	V
Continuous reverse voltage	V <sub>R</sub>	75	V
Continuous forward current(single diode loaded *) (double diode loaded *)	I <sub>F</sub>	215 125	mA
Repetitive peak forward current	I <sub>F</sub> <sub>RM</sub>	450	mA
Non-repetitive peak forward current T <sub>j</sub> =25 °C t=1 μ s t=1ms t=1s	I <sub>F</sub> <sub>SM</sub>	4 1 0.5	A
power dissipation *	P <sub>D</sub>	250	mW
Thermal resistance from junction to tie-point	R <sub>th j-tp</sub>	360	K/W
Thermal resistance from junction to ambient *	R <sub>th j-a</sub>	500	K/W
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature Range	T <sub>stg</sub>	-65 to +150	°C

\* Device mounted on an FR4 printed-circuit board.

### ■ Electrical Characteristics Ta = 25°C


Parameter	Symbol	Test conditions	Max	Unit
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 1 mA	715	mV
		I <sub>F</sub> = 10 mA	855	mV
		I <sub>F</sub> = 50 mA	1	V
		I <sub>F</sub> = 150 mA	1.25	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> = 75 V	1	
		V <sub>R</sub> = 25 V; T <sub>j</sub> = 150 °C	30	μA
		V <sub>R</sub> = 75 V; T <sub>j</sub> = 150 °C	50	
Diode capacitance	C <sub>d</sub>	V <sub>R</sub> = 0 V, f = 1 MHz	1.5	pF
Reverse recovery time	t <sub>rr</sub>	when switched from I <sub>F</sub> = 10 mA to I <sub>R</sub> = 10 mA; R <sub>L</sub> = 100 Ω; measured at I <sub>R</sub> = 1 mA	4	nS
Forward recovery voltage	V <sub>fr</sub>	I <sub>F</sub> = 10 mA, t <sub>r</sub> = 20 ns	1.75	V

■ Typical Characteristics

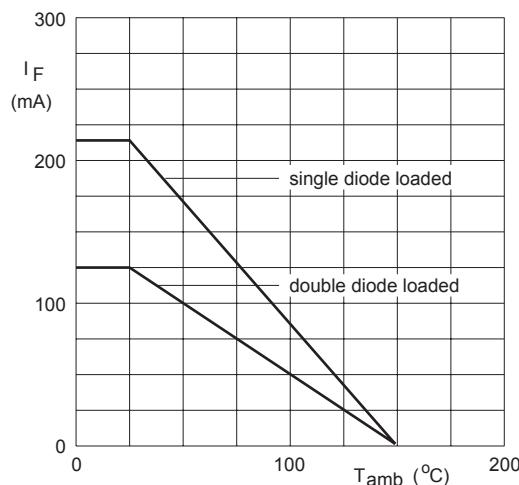

Device mounted on an FR4 printed-circuit board.

Fig.2 Maximum permissible continuous forward current as a function of ambient temperature.

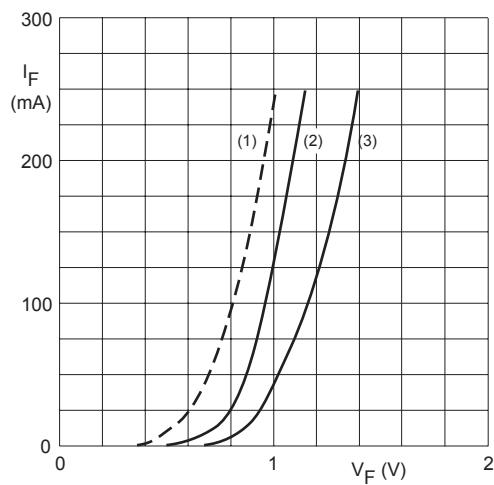


(1)  $T_j = 150 \text{ }^\circ\text{C}$ ; typical values.

(2)  $T_j = 25 \text{ }^\circ\text{C}$ ; typical values.

(3)  $T_j = 25 \text{ }^\circ\text{C}$ ; maximum values.

Fig.3 Forward current as a function of forward voltage.

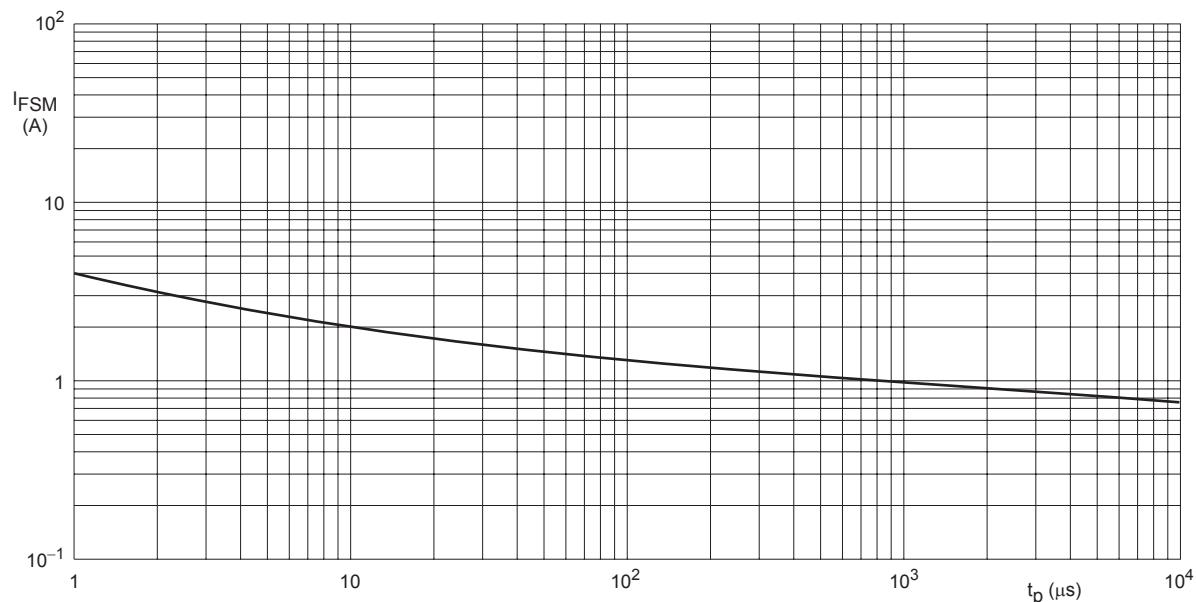

Based on square wave currents.  
 $T_j = 25 \text{ }^\circ\text{C}$  prior to surge.

Fig.4 Maximum permissible non-repetitive peak forward current as a function of pulse duration.


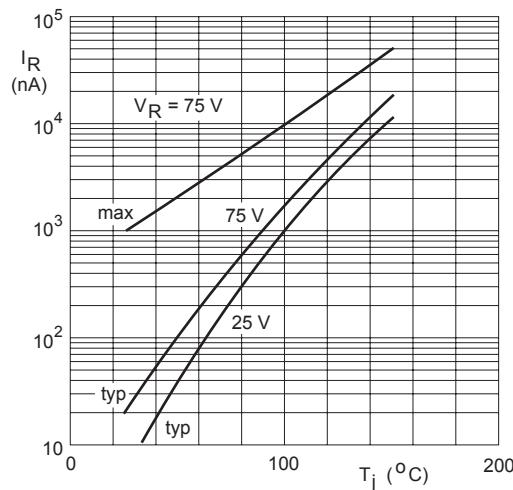


Fig.5 Reverse current as a function of junction temperature.

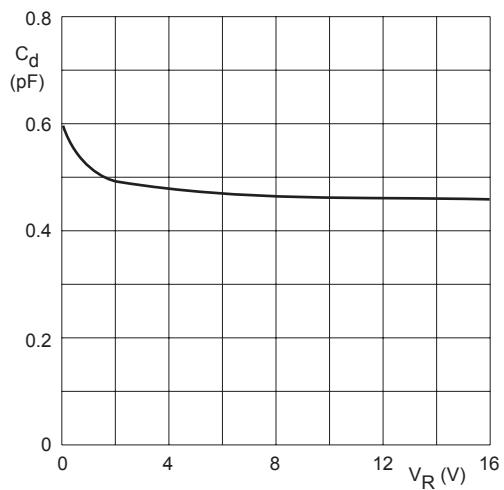


$f = 1$  MHz;  $T_j = 25$   $^{\circ}$ C.

Fig.6 Diode capacitance as a function of reverse voltage; typical values.

## Package Outline

## SOT-23

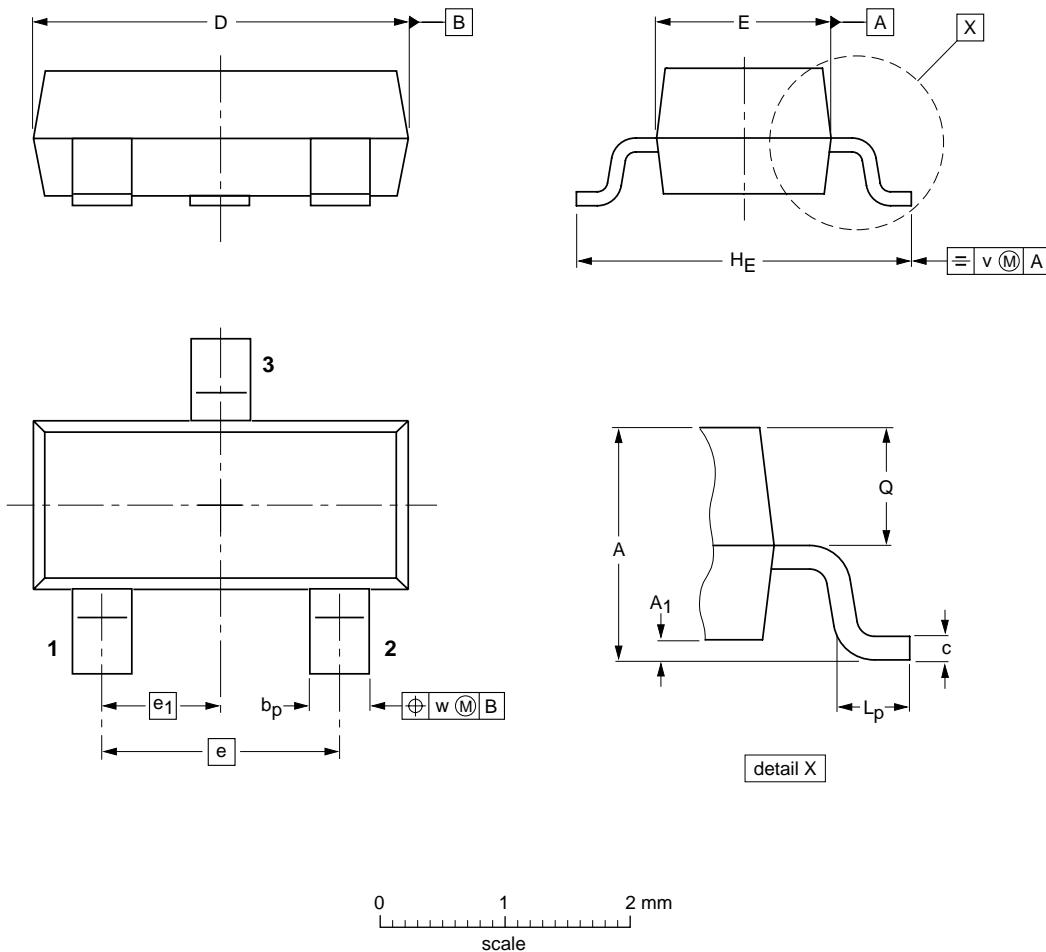

**DIMENSIONS (mm are the original dimensions)**

UNIT	A	A <sub>1</sub> max.	b <sub>p</sub>	c	D	E	e	e <sub>1</sub>	H <sub>E</sub>	L <sub>p</sub>	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1

## Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
SOT-23	Tape/Reel,7"reel	3000	EIA-481-1