


SHEET OF

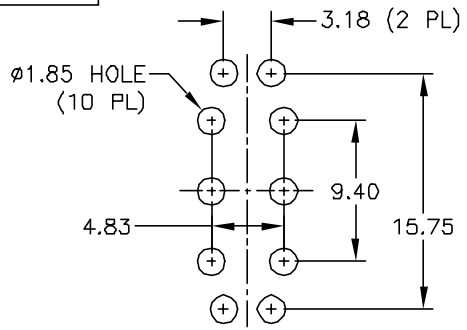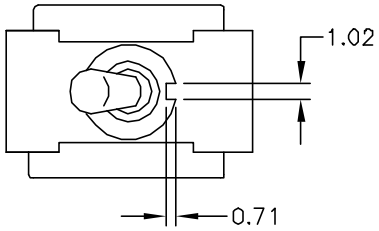



RECOMMENDED PCB LAYOUT

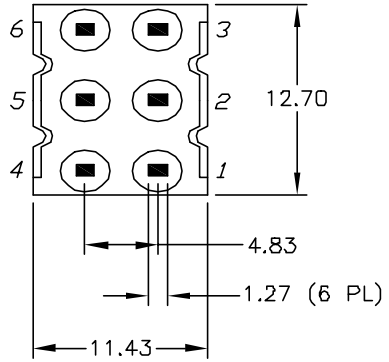


SECTION A-A


BRACKET NOT SHOWN





DPDT CIRCUIT

CONTACT CONFIGURATION

| SWITCH FUNCTION | | |
|---|---|---|
| POS. 1 | POS. 2 | POS. 3 |
| ON | OFF | ON |
| 2-3, 5-6 | OPEN | 2-1, 5-4 |

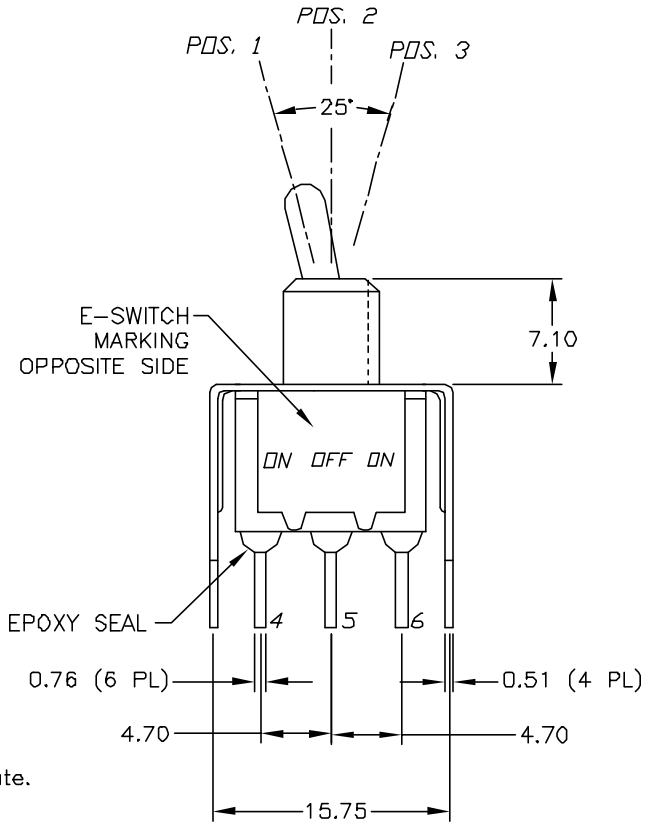

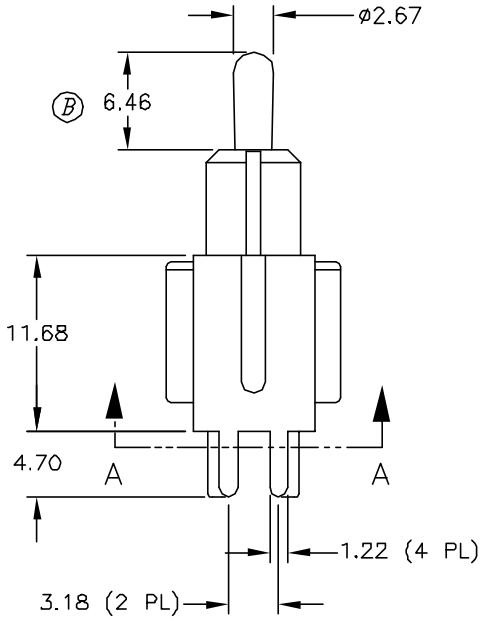
NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 0.4(VA) Max. @20V (AC or DC)
5. FIXED TERM. & MOVING CONTACT: Copper Alloy w/Gold Plate over Ni plate.
6. ELECTRIC LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

| REV. | ECN No. | DESCRIPTION | DATE | CHKD |
|---|---|---|---|---|
| B | 11547 | REVISED ACTUATOR | 6/29/01 | CJB |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 100 DP-3 T2 B4 VS2 R E

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 2:1 | 5/11/01 | CJB | T123032 | B |