Film Capacitors

Metallized Polyester Film Capacitors (MKT)

Series/Type: **B32520 ... B32529**
Date: August 2004

© EPCOS AG 2004. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.
Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

Typical applications

- Blocking
- Coupling, decoupling
- Bypassing
- RFI for automotive

Climatic

- Max. operating temperature: 125 °C
- Climatic category (IEC 60068-1): 55/125/56

Construction

- Dielectric: polyethylene terephthalate (polyester, PET)
- Stacked-film technology for lead spacing 5 to 15 mm
  = code D or C in digit 7 of ordering code
- Wound capacitor technology for lead spacing 10 to 27.5 mm
  = code N, Q or T in digit 7 of ordering code
- Plastic case (UL 94 V-0)
- Epoxy resin sealing (UL 94 V-0)

Features

- High pulse strength
- High contact reliability

Terminals

- Parallel wire leads, lead-free tinned
- Special lead lengths available on request


Marking

Manufacturer's logo,
rated capacitance (coded), cap. tolerance (code letter),
rated DC voltage, date of manufacture (coded),
coded type ("1") for lead spacing 5 mm,
series and lot number for lead spacing ≥10 mm

Delivery mode

Bulk (untaped)
Taped (Ammo pack or reel)
For notes on taping, refer to chapter "Taping and packing“.

Dimensional drawing



KMK0835-P-E

Dimensions in mm


Lead spacing e ±0.4	Lead diameter d_1	Type
5.0	0.5	B32529
7.5	0.5	B32520
10.0	0.6[1)]	B32521
15.0	0.8	B32522
22.5	0.8	B32523
27.5	0.8	B32524

1) 0.5 mm for capacitor width w = 4 mm

Overview of available types

Lead spacing	5.0 mm						7.5 mm				10.0 mm				
Type	B32529						B32520				B32521				
Page	5						9				11				
Technology	s	s	s	s	s	s	s	s	s	s	s	s	s	s	w
V_R (VDC)	50	63	100	250	400	630	63	100	250	400	63	100	250	400	630
V_{rms} (VAC)	32	40	63	160	200	400	40	63	160	200	40	63	160	200	200
C_R (µF)															
0.0010		■	■	■	■	■				■					
0.0015		■	■	■	■	■				■					
0.0022		■	■	■	■	■				■					
0.0033		■	■	■	■	■				■					
0.0047		■	■	■	■	■				■					
0.0068		■	■	■	■	■				■					■
0.010		■	■	■	■	■				■				■	■
0.015		■	■	■	■				■	■				■	■
0.022		■	■	■	■				■	■				■	■
0.033		■	■	■	■				■	■			■	■	■
0.047		■	■	■	■			■	■	■			■	■	
0.068		■	■	■	■		■	■	■	■			■	■	
0.10		■	■	■	■		■	■	■			■	■	■	
0.15		■	■	■			■	■	■			■	■		
0.22		■	■	■			■	■	■			■	■		
0.33	■	■	■	■			■	■				■	■		
0.47	■	■	■	■			■	■			■	■	■		
0.68	■	■	■				■	■			■	■			
1.0	■	■	■				■	■			■	■			
1.5	■	■					■				■				
2.2	■	■					■				■				
3.3	■										■				

Technology: s = Stacked-film technology / w = Wound capacitor technology




B32520 ... B32529

General purpose (stacked/wound)

Overview of available types

Lead spacing	15.0 mm						22.5 mm					27.5 mm				
Type	B32522						B32523					B32524				
Page	13						15					16				
Technology	s	s/w	s/w	s	w	w	w	w	w	w	w	w	w	w	w	w
V_R (VDC)	63	100	250	400	450	630	63	100	250	400	630	63	100	250	400	630
V_{rms} (VAC)	40	63	160	200	200	200	40	63	160	200	200	40	63	160	200	220
C_R (µF)					NEW							NEW				
0.033																
0.047																
0.068																
0.10																
0.15																
0.22																
0.33																
0.47																
0.68																
1.0																
1.5																
2.2																
3.3																
4.7																
6.8																
10																
15																
22																
33																
47																
68																

Technology: s = Stacked-film technology / w = Wound capacitor technology



Ordering codes and packing units (lead spacing 5 mm)


V_R VDC	V_{rms} f ≤60 Hz VAC	C_R µF	Max. dimensions w × h × l mm	Ordering code (composition see below)	Ammo pack pcs./unit	Reel pcs./unit	Untaped pcs./unit
50	32	0.33	3.0 × 6.5 × 7.2	B32529C5334+***	2700	2400	2000
		0.47	3.5 × 8.0 × 7.2	B32529C5474+***	2300	2000	2000
		0.68	4.5 × 9.5 × 7.3	B32529C5684+***	1800	1500	1500
		1.0	4.5 × 9.5 × 7.3	B32529C5105+***	1800	1500	1500
		1.5	6.0 × 10.5 × 7.5	B32529C5155+***	1300	1100	1000
		2.2	7.8 × 13.0 × 7.8	B32529D5225+***	1000	800	1000
		3.3	7.8 × 13.0 × 7.8	B32529D5335+***	1000	800	1000
63	40	0.0010	2.5 × 6.5 × 7.2	B32529C0102+***	3200	2800	2000
		0.0015	2.5 × 6.5 × 7.2	B32529C0152+***	3200	2800	2000
		0.0022	2.5 × 6.5 × 7.2	B32529C0222+***	3200	2800	2000
		0.0033	2.5 × 6.5 × 7.2	B32529C0332+***	3200	2800	2000
		0.0047	2.5 × 6.5 × 7.2	B32529C0472+***	3200	2800	2000
		0.0068	2.5 × 6.5 × 7.2	B32529C0682+***	3200	2800	2000
		0.010	2.5 × 6.5 × 7.2	B32529C0103+***	3200	2800	2000
		0.015	2.5 × 6.5 × 7.2	B32529C0153+***	3200	2800	2000
		0.022	2.5 × 6.5 × 7.2	B32529C0223+***	3200	2800	2000
		0.033	2.5 × 6.5 × 7.2	B32529C0333+***	3200	2800	2000
		0.047	2.5 × 6.5 × 7.2	B32529C0473+***	3200	2800	2000
		0.068	2.5 × 6.5 × 7.2	B32529C0683+***	3200	2800	2000
		0.10	2.5 × 6.5 × 7.2	B32529C0104+***	3200	2800	2000
		0.15	2.5 × 6.5 × 7.2	B32529C0154+***	3200	2800	2000
		0.22	2.5 × 6.5 × 7.2	B32529C0224+***	3200	2800	2000
		0.33	3.0 × 6.5 × 7.2	B32529C0334+***	2700	2400	2000
		0.47	3.5 × 8.0 × 7.2	B32529C0474+***	2300	2000	2000
		0.68	4.5 × 9.5 × 7.3	B32529C0684+***	1800	1500	1500
		1.0	4.5 × 9.5 × 7.3	B32529C0105+***	1800	1500	1500
		1.5	6.0 × 10.5 × 7.5	B32529C0155+***	1300	1100	1000
		2.2	7.8 × 13.0 × 7.8	B32529D0225+***	1000	800	1000

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
- M = ±20%
- K = ±10%
- J = ±5%

*** = Packaging code:
- 289 = Ammo pack
- 189 = Reel
- 000 = Untaped (lead length 6 −1 mm)



B32529

General purpose (stacked)

Ordering codes and packing units (lead spacing 5 mm)

V_R	V_{rms} f ≤60 Hz	C_R	Max. dimensions w × h × l	Ordering code (composition see	Ammo pack	Reel	Untaped
VDC	VAC	µF	mm	below)	pcs./unit	pcs./unit	pcs./unit
100	63	0.0010	2.5 × 6.5 × 7.2	B32529C1102+***	3200	2800	2000
		0.0015	2.5 × 6.5 × 7.2	B32529C1152+***	3200	2800	2000
		0.0022	2.5 × 6.5 × 7.2	B32529C1222+***	3200	2800	2000
		0.0033	2.5 × 6.5 × 7.2	B32529C1332+***	3200	2800	2000
		0.0047	2.5 × 6.5 × 7.2	B32529C1472+***	3200	2800	2000
		0.0068	2.5 × 6.5 × 7.2	B32529C1682+***	3200	2800	2000
		0.010	2.5 × 6.5 × 7.2	B32529C1103+***	3200	2800	2000
		0.015	2.5 × 6.5 × 7.2	B32529C1153+***	3200	2800	2000
		0.022	2.5 × 6.5 × 7.2	B32529C1223+***	3200	2800	2000
		0.033	2.5 × 6.5 × 7.2	B32529C1333+***	3200	2800	2000
		0.047	2.5 × 6.5 × 7.2	B32529C1473+***	3200	2800	2000
		0.068	2.5 × 6.5 × 7.2	B32529C1683+***	3200	2800	2000
		0.10	2.5 × 6.5 × 7.2	B32529C1104+***	3200	2800	2000
		0.15	3.0 × 6.5 × 7.2	B32529C1154+***	2700	2400	2000
		0.22	3.5 × 8.0 × 7.2	B32529C1224+***	2300	2000	2000
		0.33	3.5 × 8.0 × 7.2	B32529C1334+***	2300	2000	2000
		0.47	4.5 × 9.5 × 7.3	B32529C1474+***	1800	1500	1500
		0.68	6.0 × 10.5 × 7.5	B32529C1684+***	1300	1100	1000
		1.0	7.8 × 13.0 × 7.8	B32529D1105+***	1000	800	1000

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
- M = ±20%
- K = ±10%
- J = ±5%

*** = Packaging code:
- 289 = Ammo pack
- 189 = Reel
- 000 = Untaped (lead length 6 −1 mm)

Ordering codes and packing units (lead spacing 5 mm)


V_R	V_{rms} f ≤60 Hz	C_R	Max. dimensions w × h × l	Ordering code (composition see	Ammo pack	Reel	Untaped
VDC	VAC	µF	mm	below)	pcs./unit	pcs./unit	pcs./unit
250	160	0.0010	2.5 × 6.5 × 7.2	B32529C3102+***	3200	2800	2000
		0.0015	2.5 × 6.5 × 7.2	B32529C3152+***	3200	2800	2000
		0.0022	2.5 × 6.5 × 7.2	B32529C3222+***	3200	2800	2000
		0.0033	2.5 × 6.5 × 7.2	B32529C3332+***	3200	2800	2000
		0.0047	2.5 × 6.5 × 7.2	B32529C3472+***	3200	2800	2000
		0.0068	2.5 × 6.5 × 7.2	B32529C3682+***	3200	2800	2000
		0.010	2.5 × 6.5 × 7.2	B32529C3103+***	3200	2800	2000
		0.015	2.5 × 6.5 × 7.2	B32529C3153+***	3200	2800	2000
		0.022	2.5 × 6.5 × 7.2	B32529C3223+***	3200	2800	2000
		0.033	3.0 × 6.5 × 7.2	B32529C3333+***	2700	2400	2000
		0.047	3.5 × 8.0 × 7.2	B32529C3473+***	2300	2000	2000
		0.068	4.5 × 9.5 × 7.3	B32529C3683+***	1800	1500	1500
		0.10	4.5 × 9.5 × 7.3	B32529C3104+***	1800	1500	1500
		0.15	5.0 × 10.0 × 7.5	B32529C3154+***	1600	1400	1500
		0.22	7.8 × 13.0 × 7.8	B32529D3224+***	1000	800	1000
		0.33	7.8 × 13.0 × 7.8	B32529C3334+***	1000	800	1000
		0.47	7.8 × 13.0 × 7.8	B32529C3474+***	1000	800	1000
400	200	0.0010	2.5 × 6.5 × 7.2	B32529C6102+***	3200	2800	2000
		0.0015	2.5 × 6.5 × 7.2	B32529C6152+***	3200	2800	2000
		0.0022	2.5 × 6.5 × 7.2	B32529C6222+***	3200	2800	2000
		0.0033	2.5 × 6.5 × 7.2	B32529C6332+***	3200	2800	2000
		0.0047	2.5 × 6.5 × 7.2	B32529C6472+***	3200	2800	2000
		0.0068	2.5 × 6.5 × 7.2	B32529C6682+***	3200	2800	2000
		0.010	3.0 × 6.5 × 7.2	B32529C6103+***	2700	2400	2000
		0.015	3.5 × 8.0 × 7.2	B32529C6153+***	2300	2000	2000
		0.022	4.5 × 9.5 × 7.3	B32529C6223+***	1800	1500	1500
		0.033	5.0 × 10.0 × 7.5	B32529C6333+***	1600	1400	1500
		0.047	6.0 × 10.5 × 7.5	B32529C6473+***	1300	1100	1000
		0.068	7.8 × 13.0 × 7.8	B32529D6683+***	1000	800	1000
		0.10	7.8 × 13.0 × 7.8	B32529D6104+***	1000	800	1000

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
M = ±20%
K = ±10%
J = ±5%

*** = Packaging code:
289 = Ammo pack
189 = Reel
000 = Untaped (lead length 6 −1 mm)



B32529

General purpose (stacked)

Ordering codes and packing units (lead spacing 5 mm)


V_R	V_{rms} f ≤60 Hz	C_R	Max. dimensions w × h × l	Ordering code (composition see	Ammo pack	Reel	Untaped
VDC	VAC	µF	mm	below)	pcs./unit	pcs./unit	pcs./unit
630	400	0.0010	2.5 × 6.5 × 7.2	B32529C8102+***	3200	2800	2000
		0.0015	2.5 × 6.5 × 7.2	B32529C8152+***	3200	2800	2000
		0.0022	2.5 × 6.5 × 7.2	B32529C8222+***	3200	2800	2000
		0.0033	3.5 × 8.0 × 7.2	B32529C8332+***	2300	2000	2000
		0.0047	3.5 × 8.0 × 7.2	B32529C8472+***	2300	2000	2000
		0.0068	3.5 × 8.0 × 7.2	B32529C8682+***	2300	2000	2000
		0.010	5.0 × 10.0 × 7.5	B32529C8103+***	1600	1400	1500

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
M = ±20%
K = ±10%
J = ±5%

*** = Packaging code:
289 = Ammo pack
189 = Reel
000 = Untaped (lead length 6 −1 mm)



Ordering codes and packing units (lead spacing 7.5 mm)


V_R VDC	V_{rms} f ≤60 Hz VAC	C_R µF	Max. dimensions w × h × l mm	Ordering code (composition see below)	Ammo pack pcs./unit	Reel pcs./unit	Untaped pcs./unit
63	40	0.068	2.5 × 7.0 × 10.0	B32520C0683+***	3200	2800	2500
		0.10	2.5 × 7.0 × 10.0	B32520C0104+***	3200	2800	2500
		0.15	2.5 × 7.0 × 10.0	B32520C0154+***	3200	2800	2500
		0.22	2.5 × 7.0 × 10.0	B32520C0224+***	3200	2800	2500
		0.33	2.5 × 7.0 × 10.0	B32520C0334+***	3200	2800	2500
		0.47	3.0 × 8.0 × 10.0	B32520C0474+***	2600	2400	2000
		0.68	4.0 × 8.5 × 10.0	B32520C0684+***	2000	1800	1500
		1.0	5.0 × 10.5 × 10.0	B32520C0105+***	1600	1400	1000
		1.5	5.0 × 10.5 × 10.0	B32520C0155+***	1600	1400	1000
		2.2	6.0 × 12.0 × 10.3	B32520C0225+***	1300	1100	750
100	63	0.047	2.5 × 7.0 × 10.0	B32520C1473+***	3200	2800	2500
		0.068	2.5 × 7.0 × 10.0	B32520C1683+***	3200	2800	2500
		0.10	2.5 × 7.0 × 10.0	B32520C1104+***	3200	2800	2500
		0.15	3.0 × 8.0 × 10.0	B32520C1154+***	2600	2400	2000
		0.22	3.0 × 8.0 × 10.0	B32520C1224+***	2600	2400	2000
		0.33	4.0 × 8.5 × 10.0	B32520C1334+***	2000	1800	1500
		0.47	5.0 × 10.5 × 10.0	B32520C1474+***	1600	1400	1000
		0.68	6.0 × 12.0 × 10.3	B32520C1684+***	1300	1100	750
		1.0	6.0 × 12.0 × 10.3	B32520C1105+***	1300	1100	750
250	160	0.015	2.5 × 7.0 × 10.0	B32520C3153+***	3200	2800	2500
		0.022	2.5 × 7.0 × 10.0	B32520C3223+***	3200	2800	2500
		0.033	2.5 × 7.0 × 10.0	B32520C3333+***	3200	2800	2500
		0.047	2.5 × 7.0 × 10.0	B32520C3473+***	3200	2800	2500
		0.068	3.0 × 8.0 × 10.0	B32520C3683+***	2600	2400	2000
		0.10	4.0 × 8.5 × 10.0	B32520C3104+***	2000	1800	1500
		0.15	5.0 × 10.5 × 10.0	B32520C3154+***	1600	1400	1000
		0.22	6.0 × 12.0 × 10.3	B32520C3224+***	1300	1100	750

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
- M = ±20%
- K = ±10%
- J = ±5%

*** = Packaging code:
- 289 = Ammo pack
- 189 = Reel
- 000 = Untaped (lead length 6 −1 mm)



B32520

General purpose (stacked)

Ordering codes and packing units (lead spacing 7.5 mm)

V_R	V_{rms} f ≤60 Hz	C_R	Max. dimensions w × h × l	Ordering code (composition see	Ammo pack	Reel	Untaped
VDC	VAC	µF	mm	below)	pcs./unit	pcs./unit	pcs./unit
400	200	0.0010	2.5 × 7.0 × 10.0	B32520C6102+***	3200	2800	2500
		0.0015	2.5 × 7.0 × 10.0	B32520C6152+***	3200	2800	2500
		0.0022	2.5 × 7.0 × 10.0	B32520C6222+***	3200	2800	2500
		0.0033	2.5 × 7.0 × 10.0	B32520C6332+***	3200	2800	2500
		0.0047	2.5 × 7.0 × 10.0	B32520C6472+***	3200	2800	2500
		0.0068	2.5 × 7.0 × 10.0	B32520C6682+***	3200	2800	2500
		0.010	2.5 × 7.0 × 10.0	B32520C6103+***	3200	2800	2500
		0.015	3.0 × 8.0 × 10.0	B32520C6153+***	2600	2400	2000
		0.022	4.0 × 8.5 × 10.0	B32520C6223+***	2000	1800	1500
		0.033	5.0 × 10.5 × 10.0	B32520C6333+***	1600	1400	1000
		0.047	5.0 × 10.5 × 10.0	B32520C6473+***	1600	1400	1000
		0.068	6.0 × 12.0 × 10.3	B32520C6683+***	1300	1100	750

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
M = ±20%
K = ±10%
J = ±5%

*** = Packaging code:
289 = Ammo pack
189 = Reel
000 = Untaped (lead length 6 −1 mm)

Ordering codes and packing units (lead spacing 10 mm)

V_R	V_{rms} f ≤60 Hz	C_R	Max. dimensions w × h × l	Ordering code (composition see	Ammo pack	Reel	Untaped
VDC	VAC	µF	mm	below)	pcs./unit	pcs./unit	pcs./unit
63	40	0.47	4.0 × 7.0 × 13.0	B32521C0474+***	1000	1700	1000
		0.68	4.0 × 7.0 × 13.0	B32521C0684+***	1000	1700	1000
		1.0	4.0 × 9.0 × 13.0	B32521C0105+***	1000	1700	1000
		1.5	5.0 × 11.0 × 13.0	B32521C0155+***	830	1300	1000
		2.2	5.0 × 11.0 × 13.0	B32521C0225+***	830	1300	1000
		3.3	6.0 × 12.0 × 13.0	B32521C0335+***	680	1100	1000
100	63	0.10	4.0 × 7.0 × 13.0	B32521C1104+***	1000	1700	1000
		0.15	4.0 × 7.0 × 13.0	B32521C1154+***	1000	1700	1000
		0.22	4.0 × 7.0 × 13.0	B32521C1224+***	1000	1700	1000
		0.33	4.0 × 7.0 × 13.0	B32521C1334+***	1000	1700	1000
		0.47	4.0 × 9.0 × 13.0	B32521C1474+***	1000	1700	1000
		0.68	5.0 × 11.0 × 13.0	B32521C1684+***	830	1300	1000
		1.0	6.0 × 12.0 × 13.0	B32521C1105+***	680	1100	1000
250	160	0.033	4.0 × 7.0 × 13.0	B32521C3333+***	1000	1700	1000
		0.047	4.0 × 7.0 × 13.0	B32521C3473+***	1000	1700	1000
		0.068	4.0 × 7.0 × 13.0	B32521C3683+***	1000	1700	1000
		0.10	4.0 × 7.0 × 13.0	B32521C3104+***	1000	1700	1000
		0.15	4.0 × 9.0 × 13.0	B32521C3154+***	1000	1700	1000
		0.22	5.0 × 11.0 × 13.0	B32521C3224+***	830	1300	1000
		0.33	5.0 × 11.0 × 13.0	B32521C3334+***	830	1300	1000
		0.47	6.0 × 12.0 × 13.0	B32521C3474+***	680	1100	1000
400	200	0.010	4.0 × 7.0 × 13.0	B32521C6103+***	1000	1700	1000
		0.015	4.0 × 7.0 × 13.0	B32521C6153+***	1000	1700	1000
		0.022	4.0 × 7.0 × 13.0	B32521C6223+***	1000	1700	1000
		0.033	4.0 × 9.0 × 13.0	B32521C6333+***	1000	1700	1000
		0.047	5.0 × 11.0 × 13.0	B32521C6473+***	830	1300	1000
		0.068	5.0 × 11.0 × 13.0	B32521C6683+***	830	1300	1000
		0.10	6.0 × 12.0 × 13.0	B32521C6104+***	680	1100	1000


∇ Wound capacitor technology

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
- M = ±20%
- K = ±10%
- J = ±5%

*** = Packaging code:
- 289 = Ammo pack
- 189 = Reel
- 000 = Untaped (lead length 6 −1 mm)



B32521

General purpose (stacked/wound)

Ordering codes and packing units (lead spacing 10 mm)

V_R	V_{rms} f ≤60 Hz	C_R		Max. dimensions w × h × l	Ordering code (composition see	Ammo pack	Reel	Untaped
VDC	VAC	µF		mm	below)	pcs./unit	pcs./unit	pcs./unit
630	200	0.0068	∇	4.0 × 9.0 × 13.0	B32521N8682+***	1000	1700	1000
		0.010	∇	4.0 × 9.0 × 13.0	B32521N8103+***	1000	1700	1000
		0.015	∇	5.0 × 11.0 × 13.0	B32521N8153+***	830	1300	1000
		0.022	∇	5.0 × 11.0 × 13.0	B32521N8223+***	830	1300	1000
		0.033	∇	6.0 × 12.0 × 13.0	B32521N8333+***	680	1100	1000

∇ Wound capacitor technology

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
- M = ±20%
- K = ±10%
- J = ±5%

*** = Packaging code:
- 289 = Ammo pack
- 189 = Reel
- 000 = Untaped (lead length 6 −1 mm)

Ordering codes and packing units (lead spacing 15 mm)

V_R VDC	V_{rms} f ≤60 Hz VAC	C_R µF		Max. dimensions w × h × l mm	Ordering code (composition see below)	Ammo pack pcs./unit	Reel pcs./unit	Untaped pcs./unit
63	40	0.68		5.0 × 10.5 × 18.0	B32522C0684+***	1170	1300	1000
		1.0		5.0 × 10.5 × 18.0	B32522C0105+***	1170	1300	1000
		1.5		5.0 × 10.5 × 18.0	B32522C0155+***	1170	1300	1000
		2.2		5.0 × 10.5 × 18.0	B32522C0225+***	1170	1300	1000
		3.3		6.0 × 11.0 × 18.0	B32522C0335+***	960	1100	1000
		4.7		7.0 × 12.5 × 18.0	B32522C0475+***	830	900	1000
		6.8		8.5 × 14.5 × 18.0	B32522C0685+***	680	700	500
		10		9.0 × 17.5 × 18.0	B32522C0106+***	640	700	500
100	63	0.33		5.0 × 10.5 × 18.0	B32522C1334+***	1170	1300	1000
		0.47		5.0 × 10.5 × 18.0	B32522C1474+***	1170	1300	1000
		0.68		5.0 × 10.5 × 18.0	B32522C1684+***	1170	1300	1000
		1.0		5.0 × 10.5 × 18.0	B32522C1105+***	1170	1300	1000
		1.0	∇	6.0 × 11.0 × 18.0	B32522Q1105+***	960	1100	1000
		1.5		6.0 × 11.0 × 18.0	B32522C1155+***	960	1100	1000
		1.5	∇	7.0 × 12.5 × 18.0	B32522Q1155+***	830	900	1000
		2.2		7.0 × 12.5 × 18.0	B32522C1225+***	830	900	1000
		2.2	∇	8.5 × 14.5 × 18.0	B32522Q1225+***	680	700	500
		3.3		8.5 × 14.5 × 18.0	B32522C1335+***	680	700	500
		3.3	∇	9.0 × 17.5 × 18.0	B32522Q1335+***	640	700	500
		4.7		9.0 × 17.5 × 18.0	B32522C1475+***	640	700	500
		4.7	∇	11.0 × 18.5 × 18.0	B32522Q1475+***	–	550	300
250	160	0.10		5.0 × 10.5 × 18.0	B32522C3104+***	1170	1300	1000
		0.15		5.0 × 10.5 × 18.0	B32522C3154+***	1170	1300	1000
		0.22		5.0 × 10.5 × 18.0	B32522C3224+***	1170	1300	1000
		0.33		5.0 × 10.5 × 18.0	B32522C3334+***	1170	1300	1000
		0.47		6.0 × 11.0 × 18.0	B32522C3474+***	960	1100	1000
		0.68		7.0 × 12.5 × 18.0	B32522C3684+***	830	900	1000
		1.0		8.5 × 14.5 × 18.0	B32522C3105+***	680	700	500
		1.0	∇	8.5 × 14.5 × 18.0	B32522N3105+***	680	700	500
		1.5		9.0 × 17.5 × 18.0	B32522C3155+***	640	700	500
		1.5	∇	9.0 × 17.5 × 18.0	B32522N3155+***	640	700	500


∇ Wound capacitor technology

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
M = ±20%
K = ±10%
J = ±5%

*** = Packaging code:
289 = Ammo pack
189 = Reel
000 = Untaped (lead length 6 −1 mm)



B32522

General purpose (stacked/wound)

Ordering codes and packing units (lead spacing 15 mm)

V_R	V_{rms} f ≤60 Hz	C_R	Max. dimensions w × h × l	Ordering code (composition see	Ammo pack	Reel	Untaped
VDC	VAC	µF	mm	below)	pcs./unit	pcs./unit	pcs./unit
400	200	0.047	5.0 × 10.5 × 18.0	B32522C6473+***	1170	1300	1000
		0.068	5.0 × 10.5 × 18.0	B32522C6683+***	1170	1300	1000
		0.10	5.0 × 10.5 × 18.0	B32522C6104+***	1170	1300	1000
		0.15	6.0 × 11.0 × 18.0	B32522C6154+***	960	1100	1000
		0.22	7.0 × 12.5 × 18.0	B32522C6224+***	830	900	1000
		0.33	8.5 × 14.5 × 18.0	B32522C6334+***	680	700	500
450	200	0.10 ∇	5.0 × 10.5 × 18.0	B32522N6104+***	1170	1300	1000
		0.15 ∇	5.0 × 10.5 × 18.0	B32522N6154+***	1170	1300	1000
		0.22 ∇	6.0 × 11.0 × 18.0	B32522N6224+***	960	1100	1000
		0.33 ∇	7.0 × 12.5 × 18.0	B32522N6334+***	830	900	1000
		0.47 ∇	8.5 × 14.5 × 18.0	B32522N6474+***	680	700	500
		0.47 ∇	8.0 × 14.0 × 18.0	B32522T6474+***	–	750	500
		0.68 ∇	9.0 × 17.5 × 18.0	B32522N6684+***	640	700	500
		0.68 ∇	13.0 × 14.0 × 18.0	B32522T6684+***	–	500	300
		1.0 ∇	11.0 × 18.5 × 18.0	B32522N6105+***	–	550	300
630	200	0.033 ∇	5.0 × 10.5 × 18.0	B32522Q8333+***	1170	1300	1000
		0.047 ∇	5.0 × 10.5 × 18.0	B32522Q8473+***	1170	1300	1000
		0.068 ∇	6.0 × 11.0 × 18.0	B32522Q8683+***	960	1100	1000
		0.10 ∇	7.0 × 12.5 × 18.0	B32522Q8104+***	830	900	1000
		0.15 ∇	8.5 × 14.5 × 18.0	B32522Q8154+***	680	700	500
		0.15 ∇	8.0 × 14.0 × 18.0	B32522T8154+***	–	750	500
		0.22 ∇	9.0 × 17.5 × 18.0	B32522Q8224+***	640	700	500
		0.33 ∇	11.0 × 18.5 × 18.0	B32522Q8334+***	–	550	300


∇ Wound capacitor technology

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
M = ±20%
K = ±10%
J = ±5%

*** = Packaging code:
289 = Ammo pack
189 = Reel
000 = Untaped (lead length 6 −1 mm)



Ordering codes and packing units (lead spacing 22.5 mm)


V_R VDC	V_{rms} f ≤60 Hz VAC	C_R µF	Max. dimensions w × h × l mm	Ordering code (composition see below)	Ammo pack pcs./unit	Reel pcs./unit	Untaped pcs./unit
63	40	3.3	6.0 × 15.0 × 26.5	B32523Q0335+***	680	700	720
		4.7	7.0 × 16.0 × 26.5	B32523Q0475+***	580	600	630
		6.8	8.5 × 16.5 × 26.5	B32523Q0685+***	480	500	510
		10	10.5 × 18.5 × 26.5	B32523Q0106+***	390	400	540
		15	12.0 × 22.0 × 26.5	B32523Q0156+***	–	–	450
100	63	1.5	6.0 × 15.0 × 26.5	B32523Q1155+***	680	700	720
		2.2	6.0 × 15.0 × 26.5	B32523Q1225+***	680	700	720
		3.3	6.0 × 15.0 × 26.5	B32523Q1335+***	680	700	720
		4.7	7.0 × 16.0 × 26.5	B32523Q1475+***	580	600	630
		6.8	8.5 × 16.5 × 26.5	B32523Q1685+***	480	500	510
		10	10.5 × 18.5 × 26.5	B32523Q1106+***	390	400	540
		15	12.0 × 22.0 × 26.5	B32523Q1156+***	–	–	450
250	160	0.47	6.0 × 15.0 × 26.5	B32523Q3474+***	680	700	720
		0.68	6.0 × 15.0 × 26.5	B32523Q3684+***	680	700	720
		1.0	6.0 × 15.0 × 26.5	B32523Q3105+***	680	700	720
		1.5	7.0 × 16.0 × 26.5	B32523Q3155+***	580	600	630
		2.2	10.5 × 16.5 × 26.5	B32523Q3225+***	390	400	540
		3.3	11.0 × 20.5 × 26.5	B32523Q3335+***	370	350	510
400	200	0.22	6.0 × 15.0 × 26.5	B32523Q6224+***	680	700	720
		0.33	6.0 × 15.0 × 26.5	B32523Q6334+***	680	700	720
		0.47	7.0 × 16.0 × 26.5	B32523Q6474+***	580	600	630
		0.68	8.5 × 16.5 × 26.5	B32523Q6684+***	480	500	510
		1.0	10.5 × 16.5 × 26.5	B32523Q6105+***	390	400	540
		1.5	11.0 × 20.5 × 26.5	B32523Q6155+***	370	350	510
630	200	0.10	6.0 × 15.0 × 26.5	B32523Q8104+***	680	700	720
		0.15	6.0 × 15.0 × 26.5	B32523Q8154+***	680	700	720
		0.22	7.0 × 16.0 × 26.5	B32523Q8224+***	580	600	630
		0.33	10.5 × 16.5 × 26.5	B32523Q8334+***	390	400	540
		0.47	10.5 × 20.5 × 26.5	B32523Q8474+***	390	400	540
		0.68	12.0 × 22.0 × 26.5	B32523Q8684+***	–	–	450

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
M = ±20%
K = ±10%
J = ±5%

*** = Packaging code:
289 = Ammo pack
189 = Reel
000 = Untaped (lead length 6 −1 mm)



B32524

General purpose (wound)

Ordering codes and packing units (lead spacing 27.5 mm)


V_R	V_{rms} f ≤60 Hz	C_R	Max. dimensions w × h × l	Ordering code (composition see	Ammo pack	Reel	Untaped
VDC	VAC	µF	mm	below)	pcs./unit	pcs./unit	pcs./unit
63	40	4.7	11.0 × 21.0 × 31.5	B32524Q0475+***	–	350	320
		6.8	11.0 × 21.0 × 31.5	B32524Q0685+***	–	350	320
		10	11.0 × 21.0 × 31.5	B32524Q0106+***	–	350	320
		15	11.0 × 21.0 × 31.5	B32524Q0156+***	–	300	280
		22	14.0 × 24.5 × 31.5	B32524Q0226+***	–	350	320
		33	18.0 × 27.5 × 31.5	B32524Q0336+***	–	–	200
		47	21.0 × 31.0 × 31.5	B32524Q0476+***	–	–	180
		68	22.0 × 36.5 × 31.5	B32524Q0686+***	–	–	160
100	63	4.7	11.0 × 21.0 × 31.5	B32524Q1475+***	–	350	320
		6.8	11.0 × 21.0 × 31.5	B32524Q1685+***	–	350	320
		10	11.0 × 21.0 × 31.5	B32524Q1106+***	–	350	320
		15	11.0 × 21.0 × 31.5	B32524Q1156+***	–	300	280
		22	14.0 × 24.5 × 31.5	B32524Q1226+***	–	350	320
		33	18.0 × 27.5 × 31.5	B32524Q1336+***	–	–	200
		47	21.0 × 31.0 × 31.5	B32524Q1476+***	–	–	180
		68	22.0 × 36.5 × 31.5	B32524Q1686+***	–	–	160
250	160	1.5	11.0 × 21.0 × 31.5	B32524Q3155+***	–	350	320
		2.2	11.0 × 21.0 × 31.5	B32524Q3225+***	–	350	320
		3.3	11.0 × 21.0 × 31.5	B32524Q3335+***	–	350	320
		4.7	11.0 × 21.0 × 31.5	B32524Q3475+***	–	350	320
		6.8	14.0 × 24.5 × 31.5	B32524Q3685+***	–	250	260
		10	18.0 × 27.5 × 31.5	B32524Q3106+***	–	–	200
		15	19.0 × 30.0 × 31.5	B32524Q3156+***	–	–	180
400	200	0.68	11.0 × 19.0 × 31.5	B32524Q6684+***	–	350	320
		1.0	11.0 × 19.0 × 31.5	B32524Q6105+***	–	350	320
		1.5	11.0 × 19.0 × 31.5	B32524Q6155+***	–	350	320
		2.2	12.5 × 21.5 × 31.5	B32524Q6225+***	–	300	280
		3.3	15.0 × 24.5 × 31.5	B32524Q6335+***	–	–	240
		4.7	18.0 × 27.5 × 31.5	B32524Q6475+***	–	–	200
		6.8	21.0 × 31.0 × 31.5	B32524Q6685+***	–	–	180

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
M = ±20%
K = ±10%
J = ±5%

*** = Packaging code:
289 = Ammo pack
189 = Reel
000 = Untaped (lead length 6 −1 mm)



Ordering codes and packing units (lead spacing 27.5 mm)

V_R	V_{rms} f ≤60 Hz	C_R	Max. dimensions w × h × l	Ordering code (composition see	Ammo pack	Reel	Untaped
VDC	VAC	µF	mm	below)	pcs./unit	pcs./unit	pcs./unit
630	220	0.33	11.0 × 21.0 × 31.5	B32524Q8334+***	–	350	320
		0.47	11.0 × 21.0 × 31.5	B32524Q8474+***	–	350	320
		0.68	11.0 × 21.0 × 31.5	B32524Q8684+***	–	350	320
		1.0	14.0 × 24.5 × 31.5	B32524Q8105+***	–	250	260
		1.5	18.0 × 27.5 × 31.5	B32524Q8155+***	–	–	200
		2.2	21.0 × 31.0 × 31.5	B32524Q8225+***	–	–	180

Further E series and intermediate capacitance values on request.

Composition of ordering code

+ = Capacitance tolerance code:
M = ±20%
K = ±10%
J = ±5%

*** = Packaging code:
289 = Ammo pack
189 = Reel
000 = Untaped (lead length 6 −1 mm)

Technical data

Operating temperature range	Max. operating temperature $T_{op,max}$			+125 °C
	Upper category temperature T_{max}			+125 °C
	Lower category temperature T_{min}			−55 °C
	Rated temperature T_R			+85 °C
Dissipation factor tan δ (in 10^{-3})	at	$C_R \leq 0.1$ µF	0.1 µF < $C_R \leq 1$ µF	$C_R > 1$ µF
at 20 °C	1 kHz	8	8	10
(upper limit values)	10 kHz	15	15	–
	100 kHz	30	–	–
Insulation resistance R_{ins}	V_R	$C_R \leq 0.33$ µF		$C_R > 0.33$ µF
or time constant $\tau = C_R \cdot R_{ins}$	≤ 100 VDC	3750 MΩ		1250 s
at 20 °C, rel. humidity ≤ 65%	≥ 250 VDC	7500 MΩ		2500 s
(minimum as-delivered values)				
DC test voltage	1.4 · V_R, 2 s			
Category voltage V_C	T_A (°C)	DC voltage derating		AC voltage derating
(continuous operation with V_{DC}	$T_A \leq 85$	$V_C = V_R$		$V_{C,rms} = V_{rms}$
or V_{AC} at f ≤ 60 Hz)	$85 < T_A \leq 125$	$V_C = V_R \cdot (165 - T_A)/80$		$V_{C,rms} = V_{rms} \cdot (165 - T_A)/80$
Operating voltage V_{op} for	T_A (°C)	DC voltage (max. hours)		AC voltage (max. hours)
short operating periods	$T_A \leq 100$	$V_{op} = 1.25 \cdot V_C$ (2000 h)		$V_{op} = 1.0 \cdot V_{C,rms}$ (2000 h)
(V_{DC} or V_{AC} at f ≤ 60 Hz)	$100 < T_A \leq 125$	$V_{op} = 1.25 \cdot V_C$ (1000 h)		$V_{op} = 1.0 \cdot V_{C,rms}$ (1000 h)
Damp heat test	56 days/40 °C/93% relative humidity			
Limit values after damp	Capacitance change $\lvert\Delta C/C\rvert$			≤ 5%
heat test	Dissipation factor change Δ tan δ			≤ 5 · 10^{-3} (at 1 kHz)
	Insulation resistance R_{ins}			≥ 50% of minimum
	or time constant $\tau = C_R \cdot R_{ins}$			as-delivered values
Reliability:				
Failure rate λ	1 fit (≤ 1 · 10^{-9}/h) at 0.5 · V_R, 40 °C			
Service life t_{SL}	200 000 h at 1.0 · V_R, 40 °C			
	For conversion to other operating conditions and temperatures, refer to chapter "Quality assurance", page .			
Failure criteria:				
Total failure	Short circuit or open circuit			
Failure due to variation	Capacitance change $\lvert\Delta C/C\rvert$			> 10%
of parameters	Dissipation factor tan δ			> 2 · upper limit value
	Insulation resistance R_{ins}			< 150 MΩ ($C_R \leq 0.33$ µF)
	or time constant $\tau = C_R \cdot R_{ins}$			< 50 s ($C_R > 0.33$ µF)

Pulse handling capability

"dV/dt" represents the maximum permissible voltage change per unit of time for non-sinusoidal voltages, expressed in V/µs.

"k_0" represents the maximum permissible pulse characteristic of the waveform applied to the capacitor, expressed in $V^2/\mu s$.

Note:
The values of dV/dt and k_0 provided below must not be exceeded in order to avoid damaging the capacitor.


dV/dt values

Lead spacing		5 mm	7.5 mm	10 mm		15 mm		22.5 mm	27.5 mm
Technology		Stacked	Stacked	Stacked	Wound	Stacked	Wound	Wound	Wound
V_R VDC	V_{rms} VAC	dV/dt in V/µs							
50	32	200	–	–	–	–	–	–	–
63	40	250	120	50	–	30	–	3	1
100	63	300	150	75	–	50	5	4	3
250	160	400	200	150	–	100	10	6	4.5
400	200	600	275	175	–	125	–	10	7.5
450	200	–	–	–	–	–	20	–	–
630	400	800	–	–	20	–	25	15	12

k_0 values

Lead spacing		5 mm	7.5 mm	10 mm		15 mm		22.5 mm	27.5 mm
Technology		Stacked	Stacked	Stacked	Wound	Stacked	Wound	Wound	Wound
V_R VDC	V_{rms} VAC	k_0 in $V^2/\mu s$							
50	32	20 000	–	–	–	–	–	–	–
63	40	30 000	15 000	6 300	–	3 800	–	375	130
100	63	60 000	30 000	15 000	–	10 000	850	750	600
250	160	200 000	100 000	75 000	–	50 000	5 000	3 000	2 250
400	200	500 000	220 000	140 000	–	100 000	–	8 000	6 000
450	200	–	–	–	–	–	15 000	–	–
630	400	1 000 000	–	–	25 000	–	30 000	18 000	15 000


Impedance Z versus frequency f
(typical values)

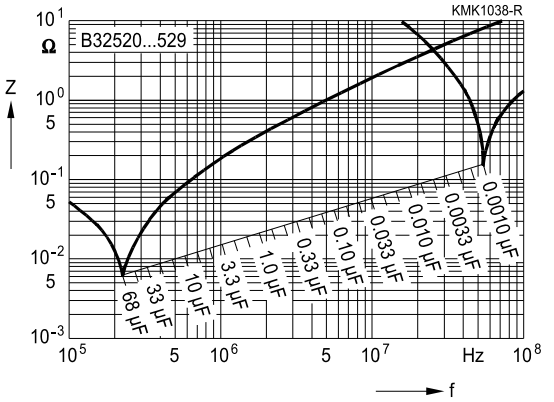


Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 5 mm


50 VDC/32 VAC

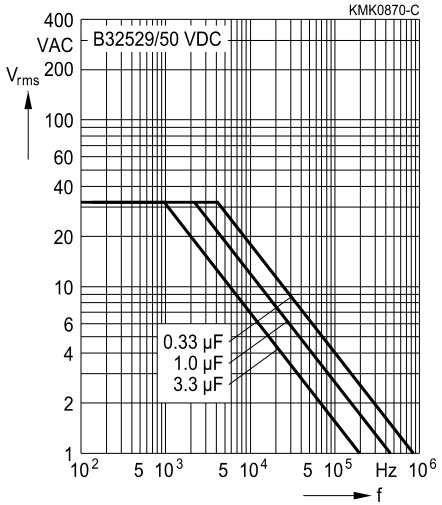


63 VDC/40 VAC

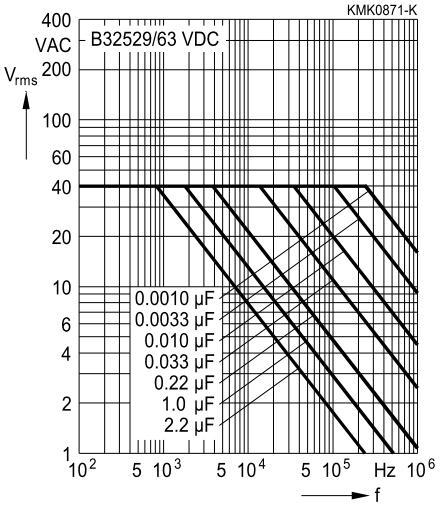


100 VDC/63 VAC

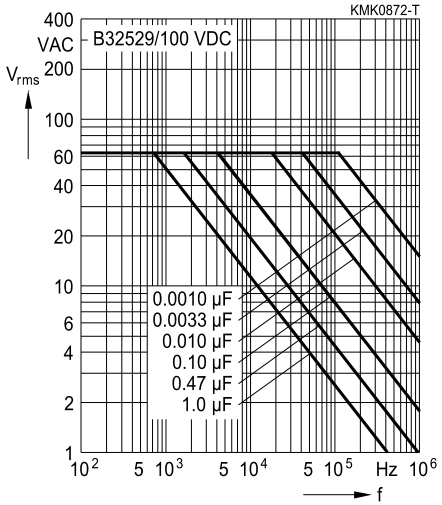

250 VDC/160 VAC

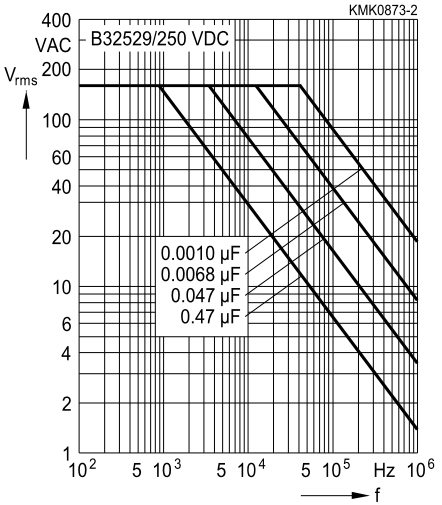





Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 5 mm

400 VDC/200 VAC

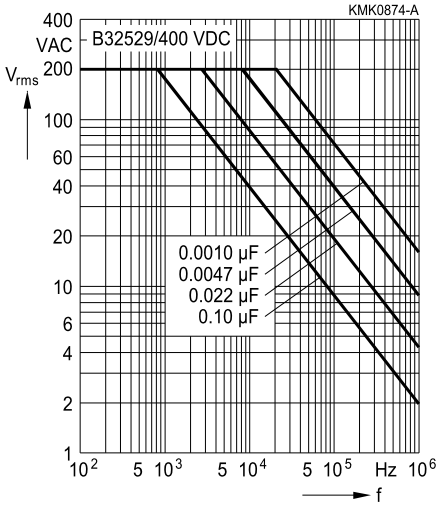


630 VDC/400 VAC

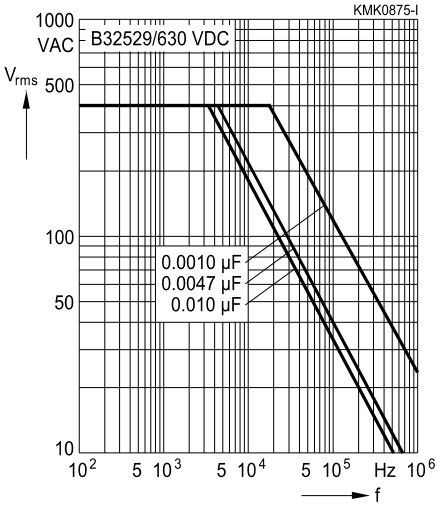


Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 7.5 mm


63 VDC/40 VAC

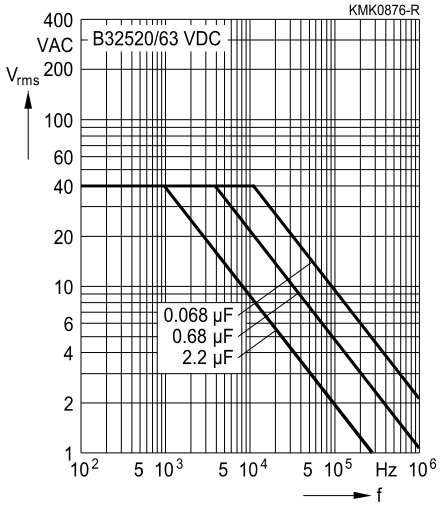


100 VDC/63 VAC

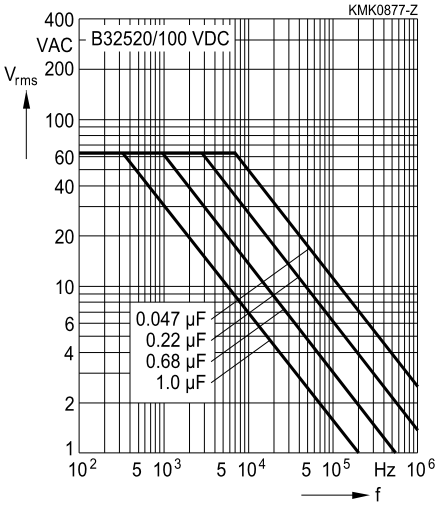

250 VDC/160 VAC

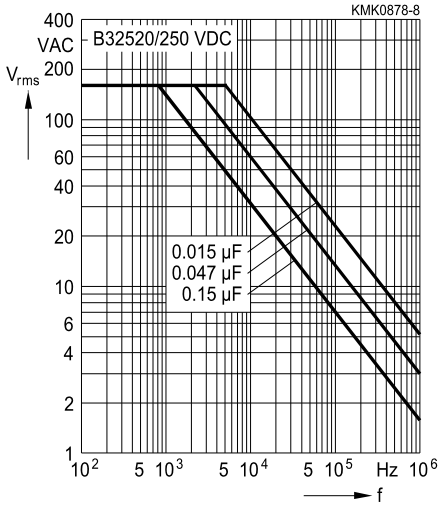


400 VDC/200 VAC

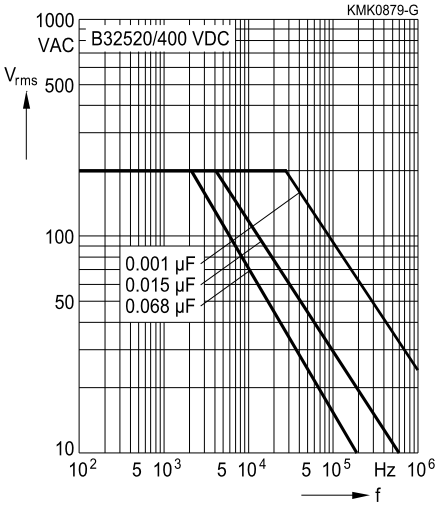


Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 10 mm


63 VDC/40 VAC

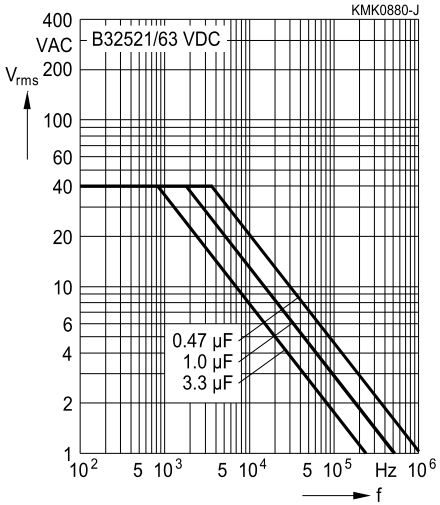


100 VDC/63 VAC

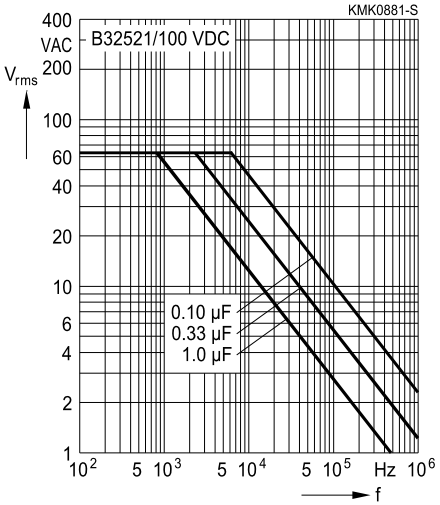

250 VDC/160 VAC

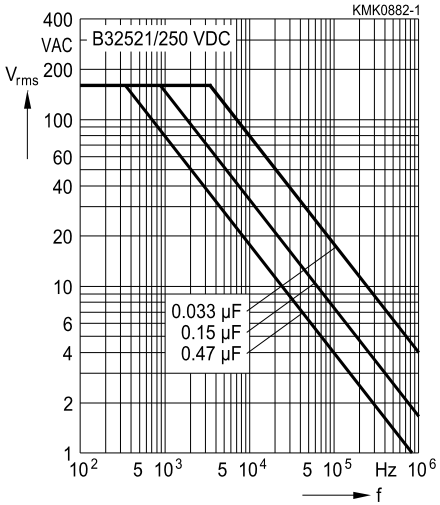


400 VDC/200 VAC

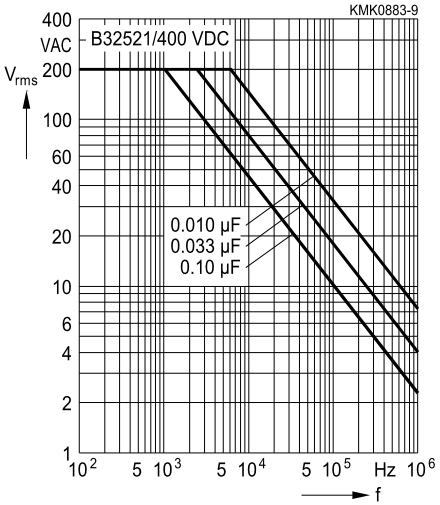

Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 10 mm


630 VDC/200 VAC

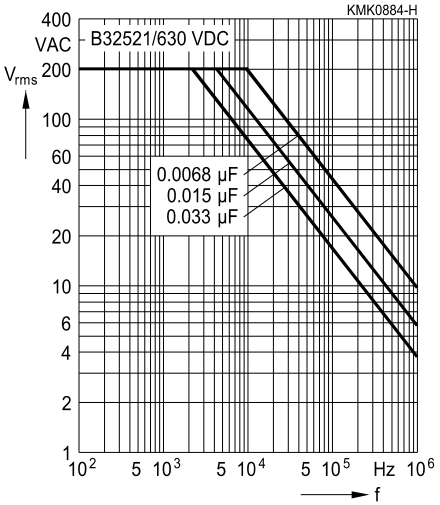


Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 15 mm


63 VDC/40 VAC

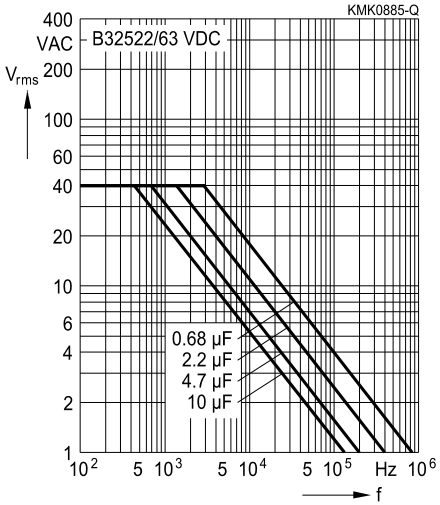


100 VDC/63 VAC

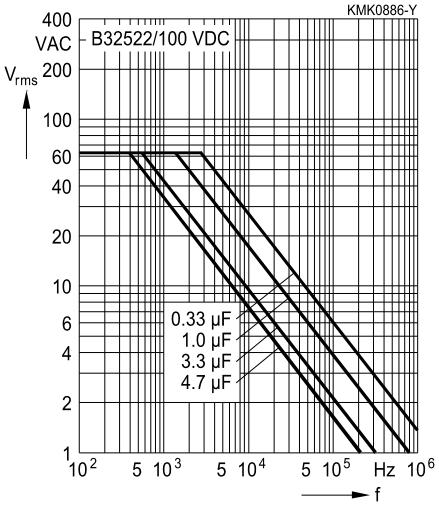

250 VDC/160 VAC

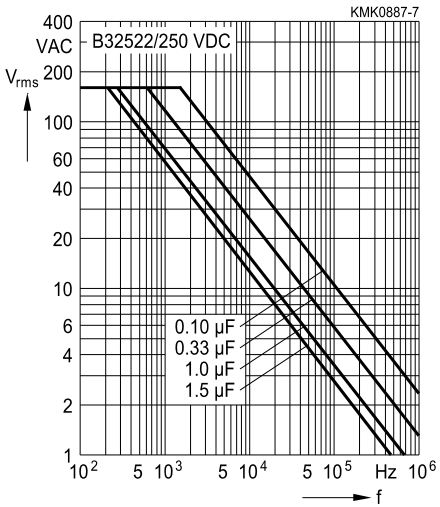


400 VDC/200 VAC

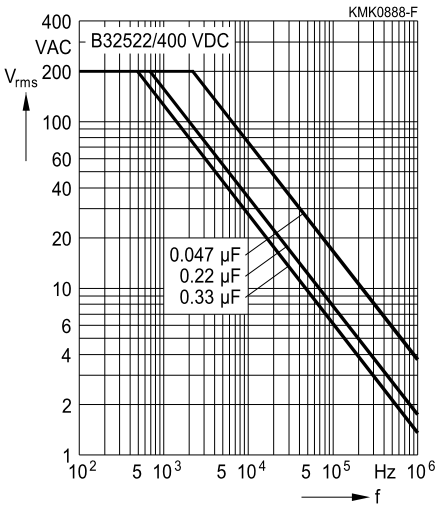


Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.


Lead spacing 15 mm

450 VDC/200 VAC

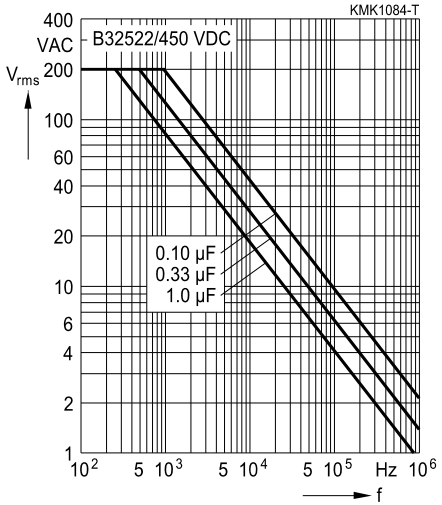

630 VDC/200 VAC

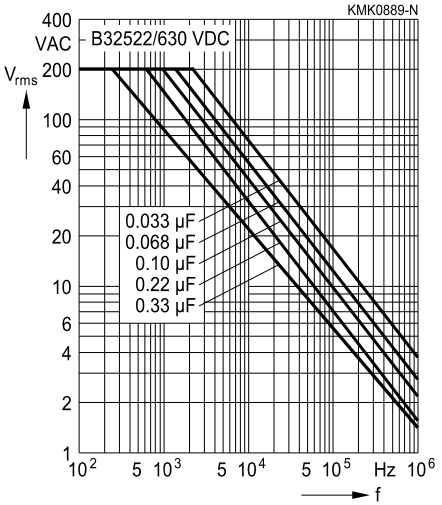





Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 22.5 mm


63 VDC/40 VAC

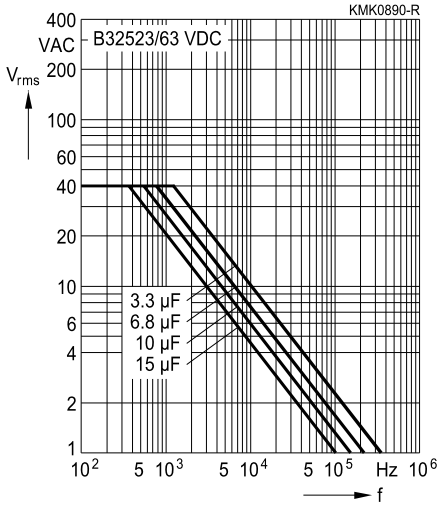


100 VDC/63 VAC

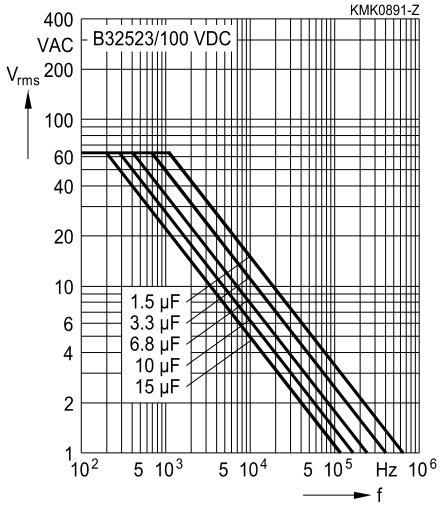

250 VDC/160 VAC

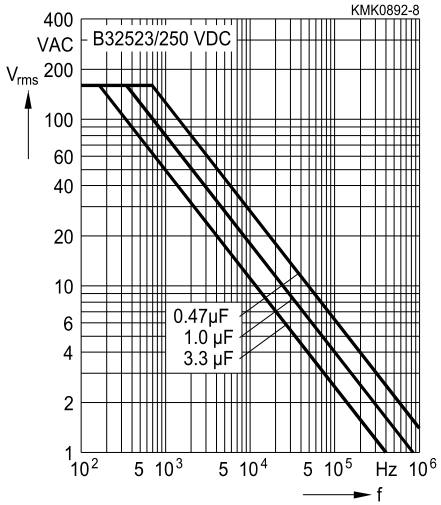


400 VDC/200 VAC

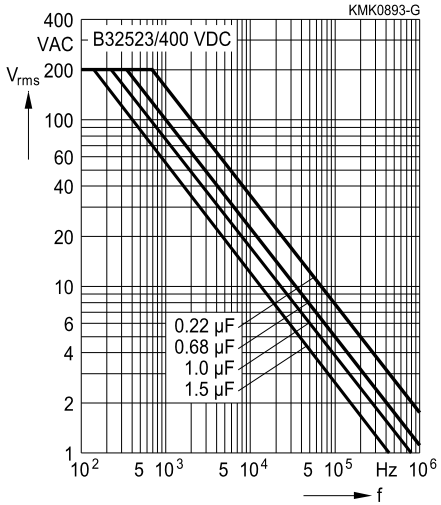


Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 22.5 mm

630 VDC/200 VAC

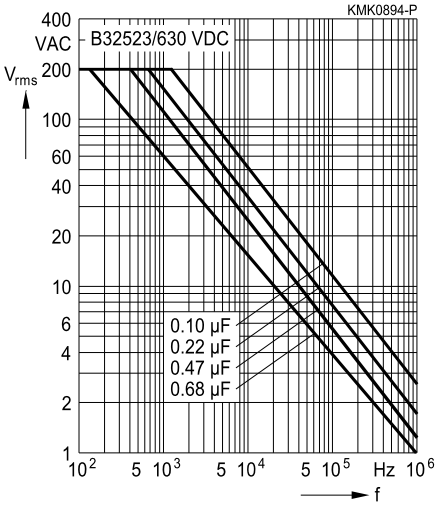





Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 27.5 mm


63 VDC/40 VAC

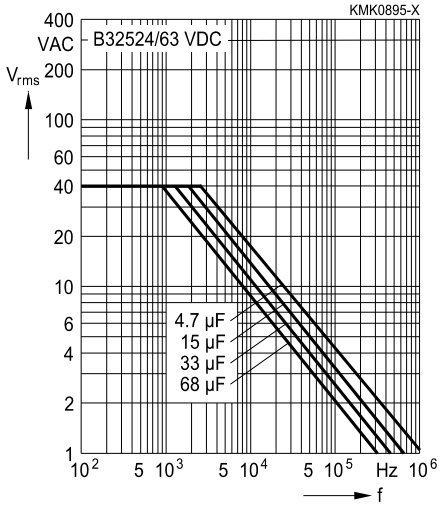


100 VDC/63 VAC

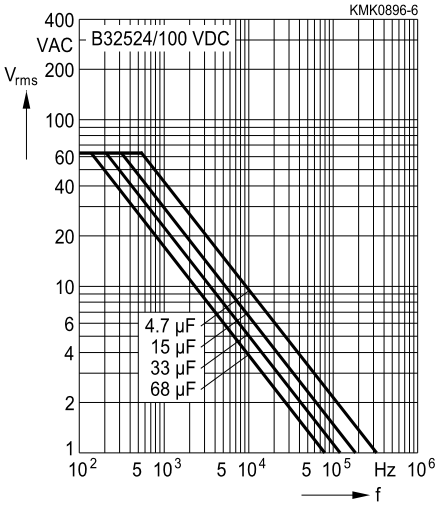


250 VDC/160 VAC

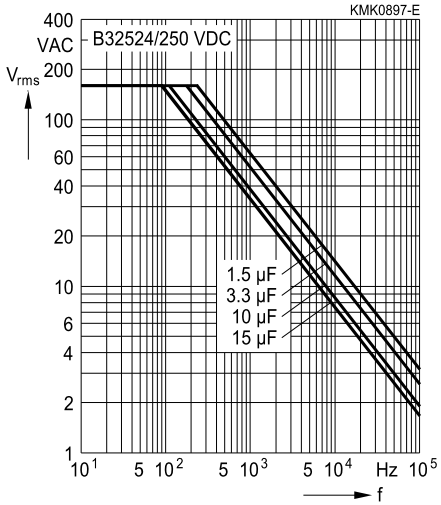

400 VDC/200 VAC

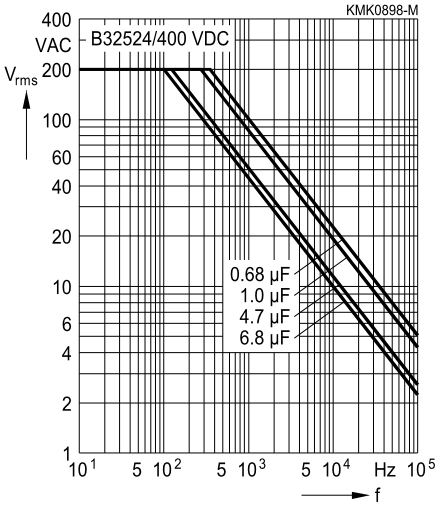



Permissible AC voltage V_{rms} versus frequency f (for sinusoidal waveforms, $T_A \leq 55$ °C)
For T_A >55 °C, please refer to "General technical information", section 3.2.3.

Lead spacing 27.5 mm

630 VDC/220 VAC

