

# SF2000C-JQ Series (RoHS Compliant)

Single-phase 2-line 500VAC Wide range high attenuation Type



## Applications

For EMC Anechoic, Shielded Chamber

## Specifications

Part No.	Rated Current	Weight	Dimensions [mm]										
			A	B	C	D	E	F	G	H	J	K	
SF2030C-JQ	30A	9kg	400	150	100	380	110	30	CTC19	500	M6	AWG10	fig1
SF2060C-JQ	60A	10kg	500		130	480		40	CTC25			AWG6	
SF2100C-JQ	100A	21kg	750	180	180	720	100	80	CTC39		M10	MLFC38mmφ	fig2
Rated Voltage	500VAC max												
Leakage Current	3.0A max/500VAC 60Hz (Please use Insulation Transformer together)												
Ambient temp.	-20 up to 50 Deg. C												

fig. 1(30, 60A)



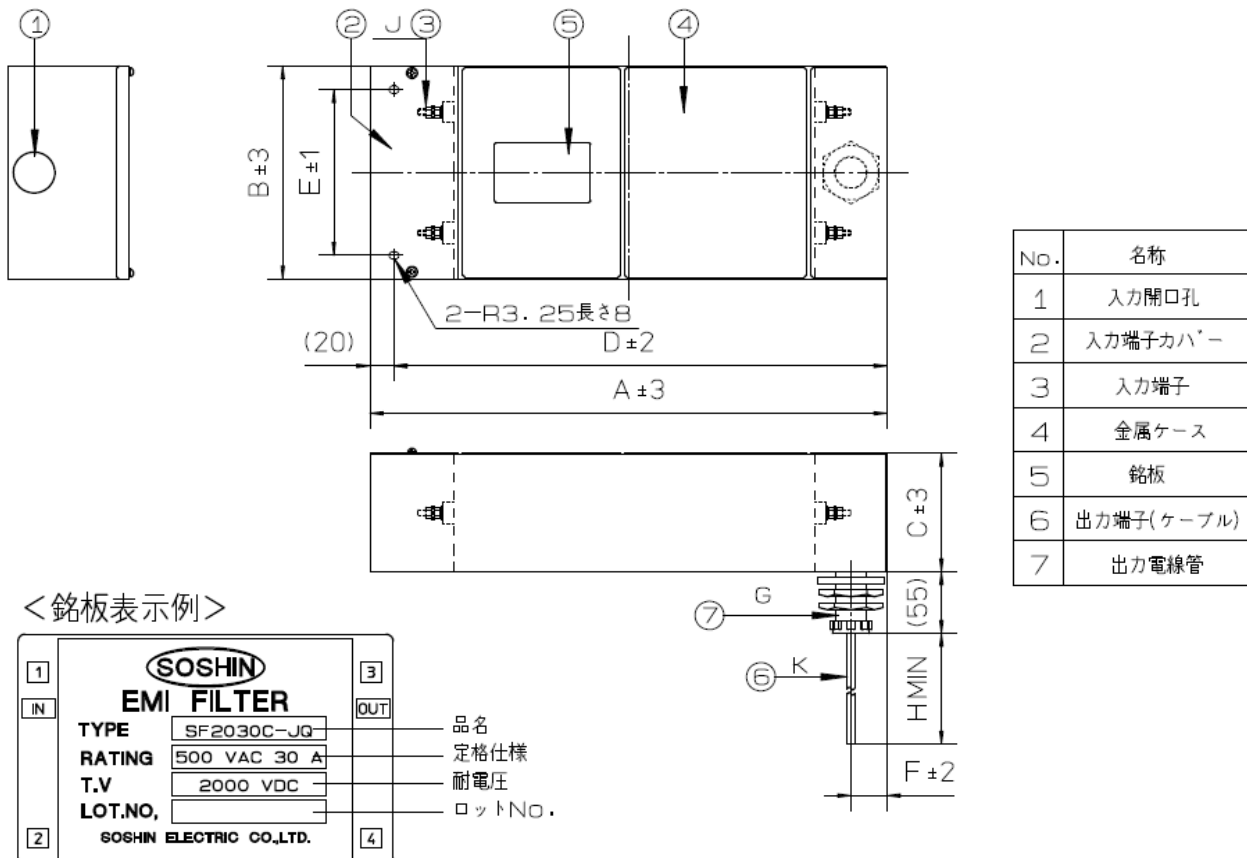


fig. 2 (100A)

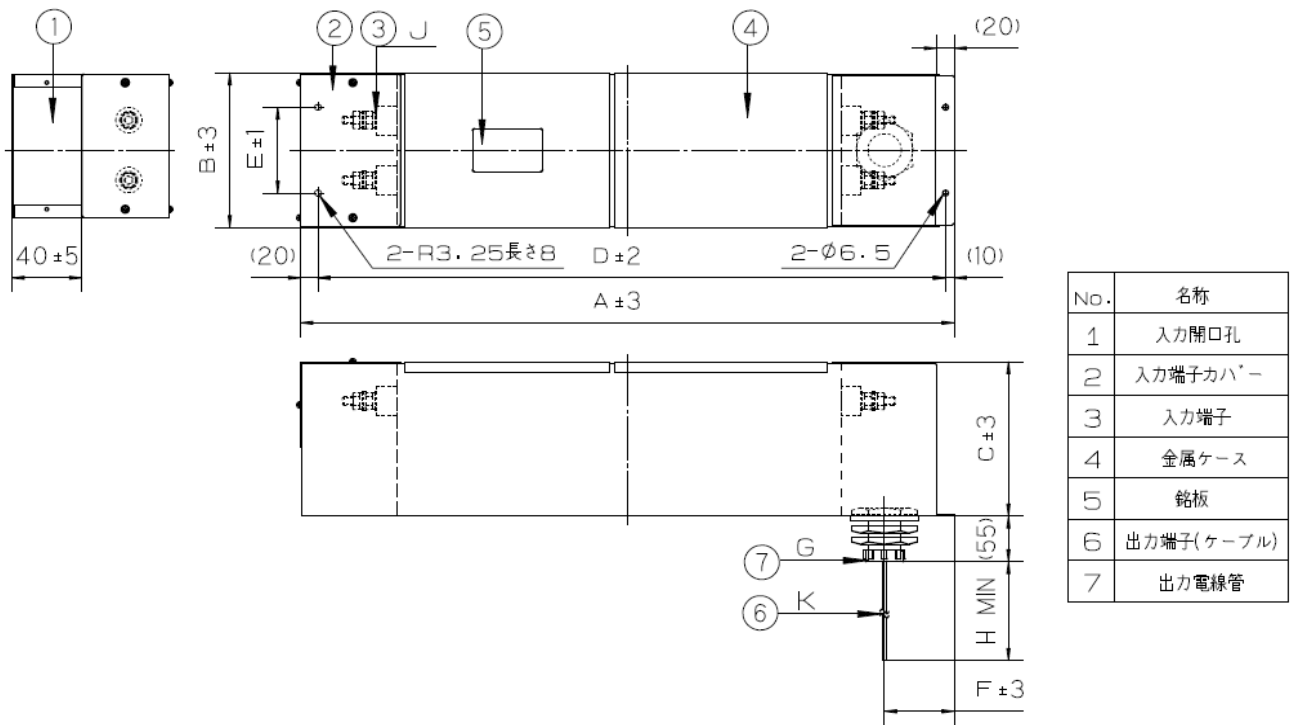

Characteristics (Typical)

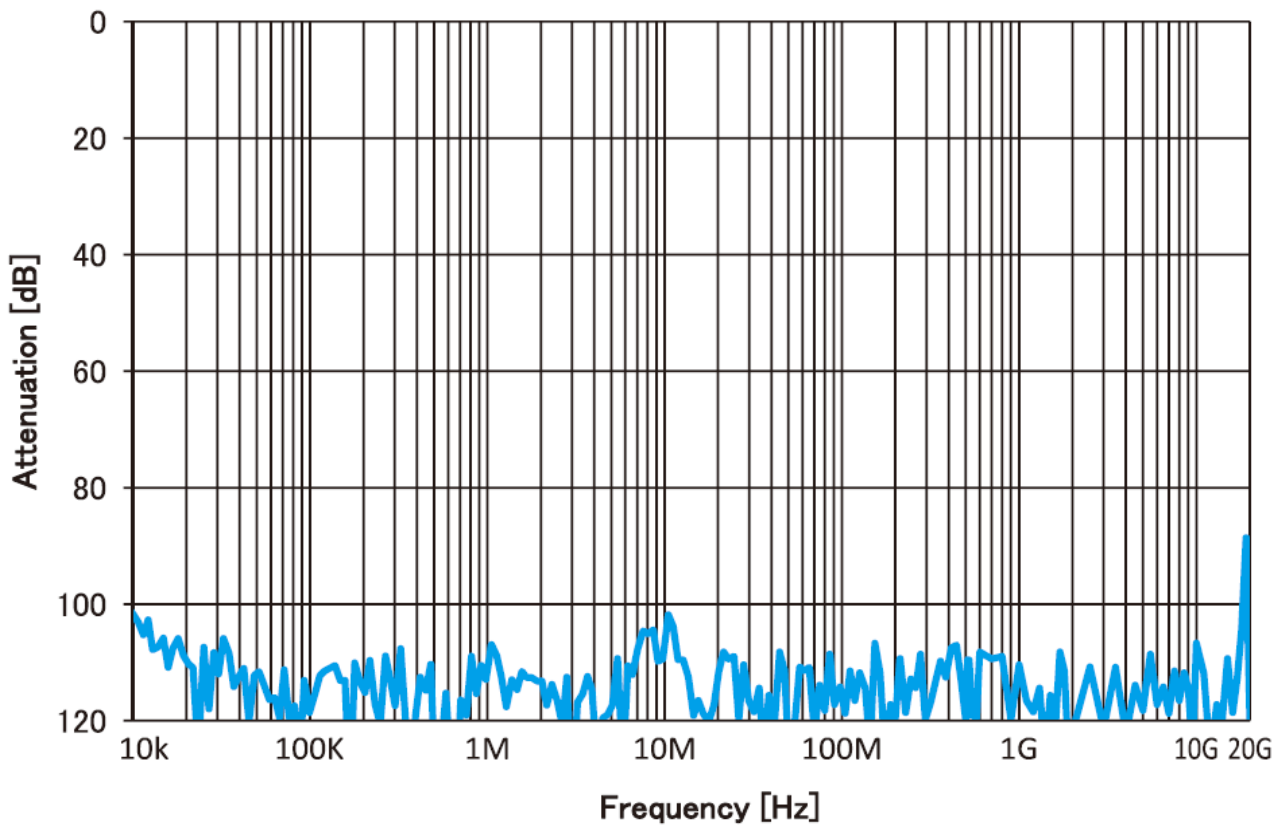

# Circuit Diagram

