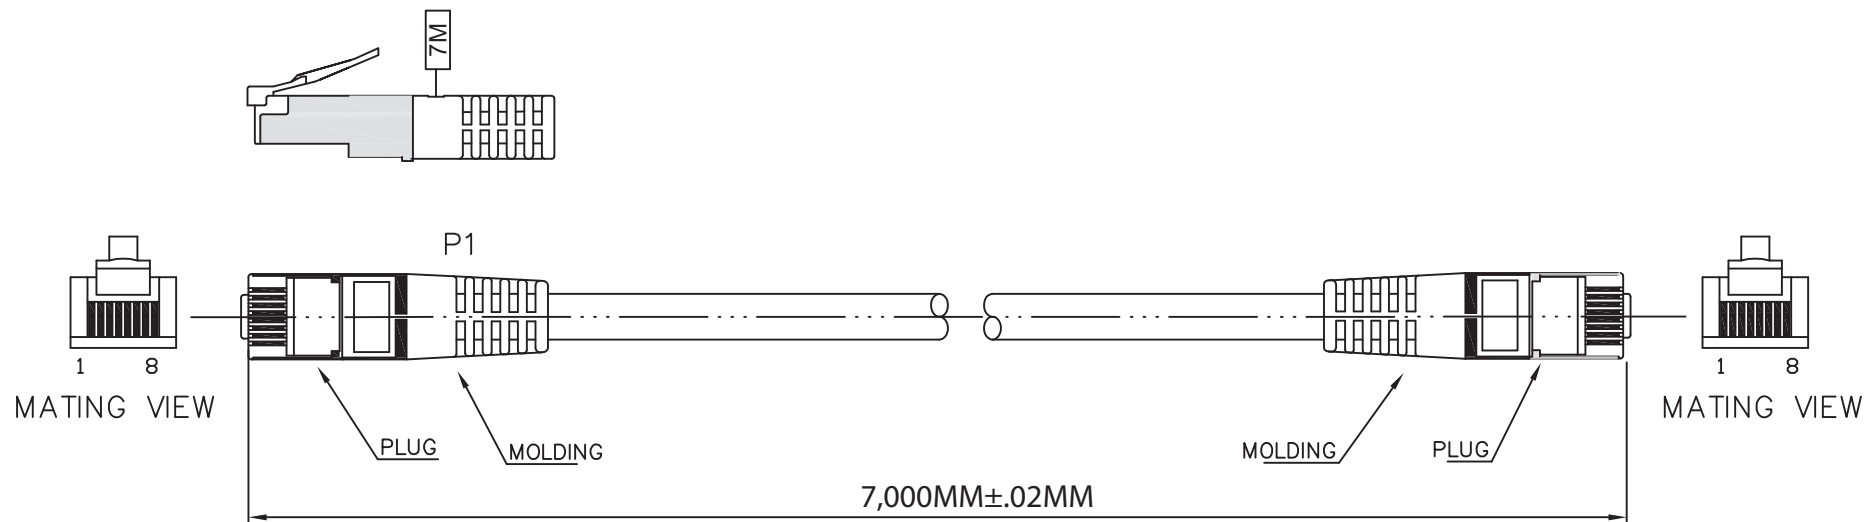


orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

Material:

- Plug: YUS-06 8P8C
- Conductor:
 - Wire: Cat.5e SFTP STR
 - Bare Copper 26AWG 7/0.16±0.015MM
- Insulator:
 - Thickness Min. at any point: 0.15MM
 - Thickness Max. Avg.: 0.25MM
 - Diameter: 0.92±0.06MM
- Jacket PVC:
 - Thickness Min. at any point: 0.40MM
 - Thickness Max. Avg.: 0.50MM
 - Diameter: 5.6±0.02MM

lead	<1,000ppm
Cadmium	<1,000ppm
Mercury	<1,000ppm
Chromium	<1,000ppm
PBB	<1,000ppm
PBDE	<1,000ppm

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

⊕ = Assmann logo

RoHS
Compliant

ITEM NO.

A-MCSSP-80070/G-R

TITLE

Cat.5e SFTP Patch Cable - Green, 7 Meters, 8P8C,
Twisted Pair, Double Foil Shielded, Braided

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved