

REV	DESCRIPTION	BY DATE	APPD
B	REVISED PER ECR# 6720	BAS 03/22/01	VBH



SPECIFICATIONS

MATERIALS

- | | |
|-------------------------------|--|
| ① Molding | Material: Diallyl Orthophthalate
Color: Gray |
| ② Pin contacts | Material: Brass
Finish: Gold over Nickel |
| ③ Socket Contact Closed Entry | Material: Copper Alloy
Finish: Gold over Nickel |



PERFORMANCE CHARACTERISTICS

Dielectric withstanding voltage (at sea level) — 2925 VAC
Current rating — 13 Amps
Operating temperature range — -55°C to +125°C

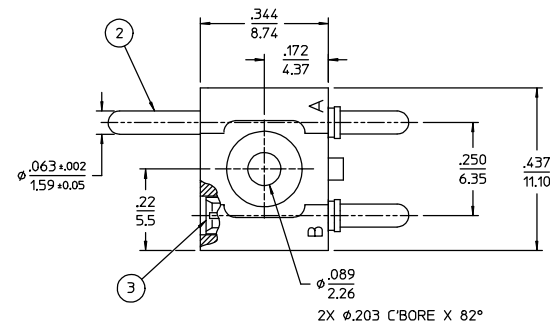



CATALOG No. JFA2S435493 SHOWN

SAME AS JFA1P1S435493 EXCEPT AS SHOWN

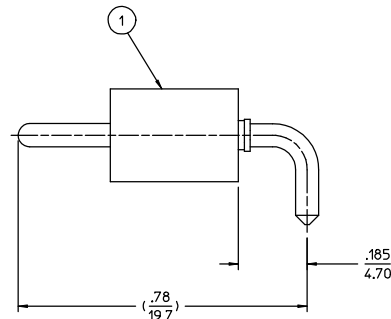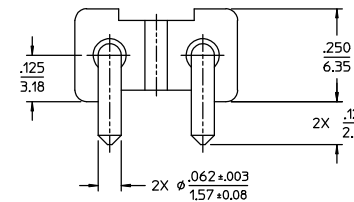

CATALOG No. JFA1P1S43A5493 SHOWN

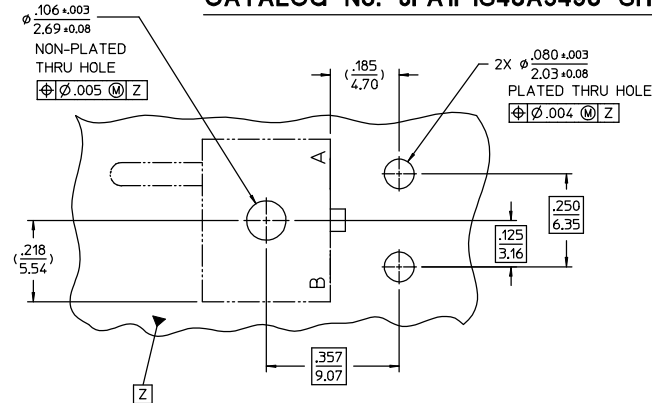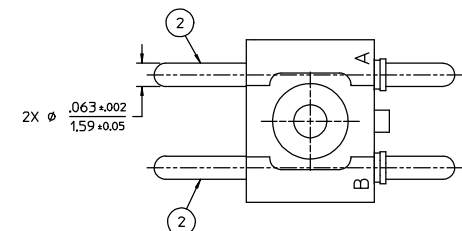

CATALOG No. JFA2P955493 SHOWN

SAME AS JFA1P1S435493 EXCEPT AS SHOWN

RECOMMENDED PC BOARD REQUIREMENTS
(Component side of board shown)

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES OR INCHES/MM TOLERANCES: DECIMALS .XX ± .02/.05 .XXX ± .007/.018 ANGLES ± 2° SCALE: 2:1				Litton Winchester 400 Park Road Retconn Watertown, Connecticut 06795	
CUSTOMER DRAWING		TITLE RIGHT ANGLE CONNECTOR JFA SERIES		A 26415 SHT. 1 OF 1 REV. B	
DRAWN M.J.C. 04/06/00 APPROVED V.B.H. 04/07/00	DATE 04/07/00 APPROVED J.B. 04/07/00	DATE 04/07/00 APPROVED J.B. 04/07/00	DATE 04/07/00 APPROVED J.B. 04/07/00		