

STANDARD RECOVERY DIODES

Stud Version

Features

- Wide current range
- High voltage ratings up to 3200V
- High surge current capabilities
- Stud cathode and stud anode version
- Standard JEDEC types


380A

Typical Applications

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

Major Ratings and Characteristics

Parameters	SD300N/R		Units
	16 to 20	25 to 32	
$I_{F(AV)}$	380	380	A
@ T_C	100	70	°C
$I_{F(RMS)}$	595	425	A
I_{FSM} @ 50Hz	6050	6050	A
@ 60Hz	6335	6335	A
I^2t @ 50Hz	183	183	KA ² s
@ 60Hz	167	167	KA ² s
V_{RRM} range	1600 to 2000	2500 to 3200	V
T_J	- 40 to 180	- 40 to 150	°C

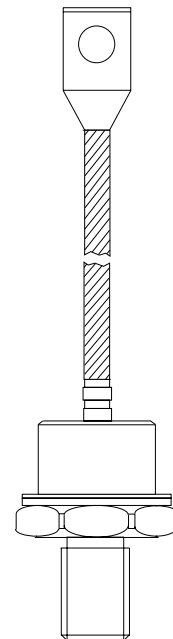

case style
DO-205AB (DO-9)

ELECTRICAL SPECIFICATIONS**Voltage Ratings**

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ $T_J = T_J$ max. mA
SD300N/R	16	1600	1700	15
	20	2000	2100	
	25	2500	2600	
	28	2800	2900	
	32	3200	3300	

Forward Conduction

Parameter		SD300N/R		Units	Conditions			
		16 to 20	25 to 32					
I _{F(AV)}	Max. average forward current @ Case temperature	380	270	A	180° conduction, half sine wave			
		100	100	°C				
I _{F(AV)}	Max. average forward current @ Case temperature	300	380	A	180° conduction, half sine wave			
		125	70	°C				
I _{F(RMS)}	Max. RMS forward current	595	425	A	DC @ T _C = 88°C (02 to 24), T _C = 91°C (25 to 32)			
I _{FSM}	Max. peak, one-cycle forward, non-repetitive surge current	6050	6050	A	t = 10ms	No voltage	Sinusoidal half wave, Initial T _J = T _J max.	
		6335	6335		t = 8.3ms	reapplied		
		5090	5090		t = 10ms	100% V _{RRM}		
		5330	5330		t = 8.3ms	reapplied		
I ² t	Maximum I ² t for fusing	183	183	KA ² s	t = 10ms	No voltage		
		167	167		t = 8.3ms	reapplied		
		129	129		t = 10ms	100% V _{RRM}		
		118	118		t = 8.3ms	reapplied		
I ² /t	Maximum I ² /t for fusing	1830	1830	KA ² /s	t = 0.1 to 10ms, no voltage reapplied			
V _{F(TO)1}	Low level value of threshold voltage	0.95	0.95	V	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , T _J = T _J max.			
V _{F(TO)2}	High level value of threshold voltage	1.05	1.05		(I > π × I _{F(AV)}), T _J = T _J max.			
r _{f1}	Low level value of forward slope resistance	0.75	0.75	mΩ	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , T _J = T _J max.			
r _{f2}	High level value of forward slope resistance	0.66	0.66		(I > π × I _{F(AV)}), T _J = T _J max.			
V _{FM}	Max. forward voltage drop	1.83	1.83	V	I _{pk} = 1180A, T _J = T _J max, t _p = 10ms sinusoidal wave			

Thermal and Mechanical Specifications

Parameter		SD300N/R		Units	Conditions
		16 to 20	25 to 32		
T _J	Max. junction operating temperature range	-40 to 180	-40 to 150	°C	
T _{stg}	Max. storage temperature range	-55 to 200	-55 to 200		
R _{thJC}	Max. thermal resistance, junction to case	0.11		K/W	DC operation
R _{thCS}	Max. thermal resistance, case to heatsink	0.04			Mounting surface, smooth, flat and greased
T	Max. allowed mounting torque ±10%	27		Nm	Not lubricated threads
wt	Approximate weight	250		g	
Case style		DO-205AB (DO-9)		See Outline Table	

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	16 to 20	25 to 32	16 to 20	25 to 32		
180°	0.019	0.019	0.013	0.013	K/W	$T_j = T_j \text{ max.}$
120°	0.023	0.023	0.023	0.023		
90°	0.028	0.028	0.030	0.030		
60°	0.042	0.042	0.044	0.044		
30°	0.073	0.073	0.074	0.074		

Ordering Information Table

Device Code

SD	30	0	N	32	P	C
1	2	3	4	5	6	7

- 1** - Diode
- 2** - Essential part number
- 3** - 0 = Standard recovery
- 4** - N = Stud Normal Polarity (Cathode to Stud)
R = Stud Reverse Polarity (Anode to Stud)
- 5** - Voltage code: Code x 100 = V_{RRM} (See Voltage Ratings table)
- 6** - P = Stud base DO-205AB (DO-9) 3/4" 16UNF-2A
- 7** - C = Ceramic Housing

NOTE: For metric Device M16 x 1.5 Contact Factory

SD300N/R Series

Bulletin I2081 rev. C 03/03

Outline Table

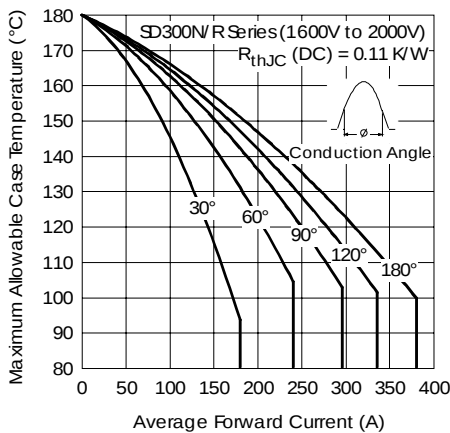
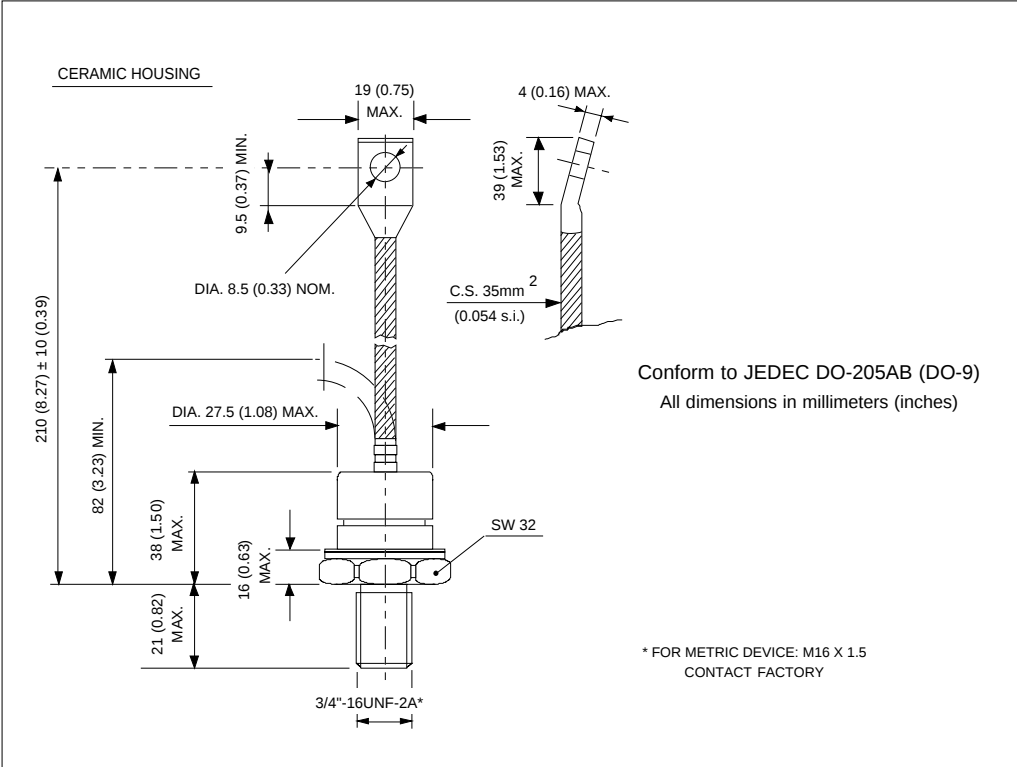


Fig. 1 - Current Ratings Characteristics

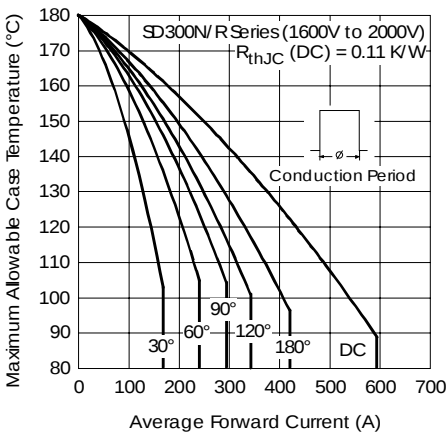


Fig. 2 - Current Ratings Characteristics

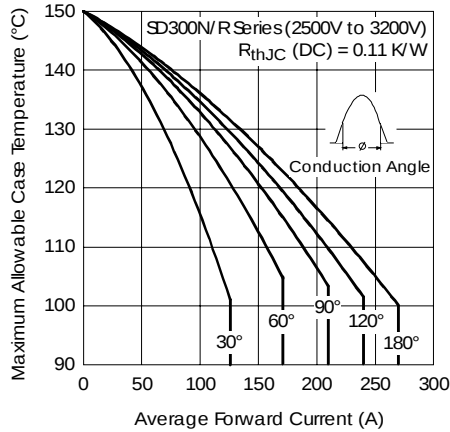


Fig. 3 - Current Ratings Characteristics

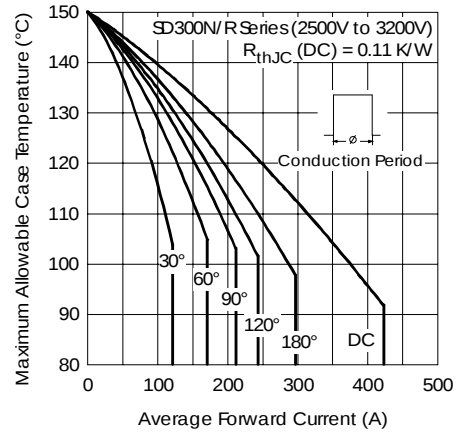


Fig. 4 - Current Ratings Characteristics

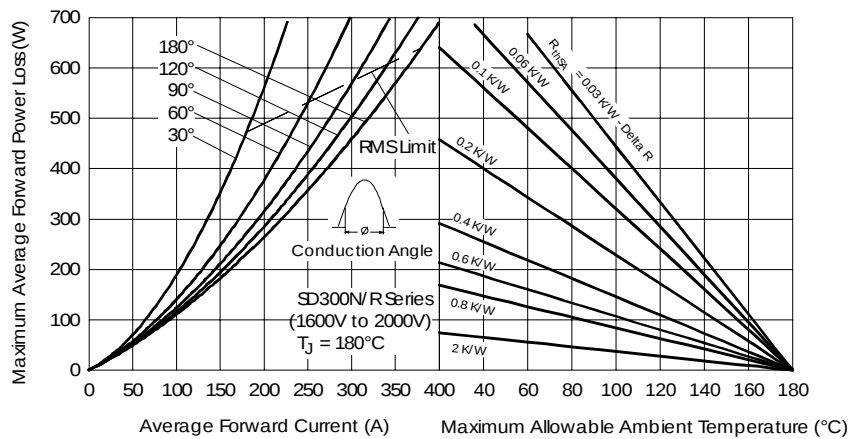


Fig. 5 - Forward Power Loss Characteristics

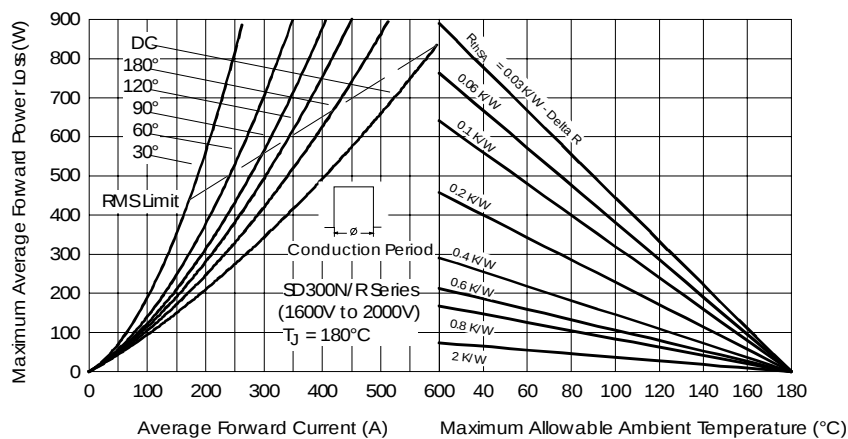


Fig. 6 - Forward Power Loss Characteristics

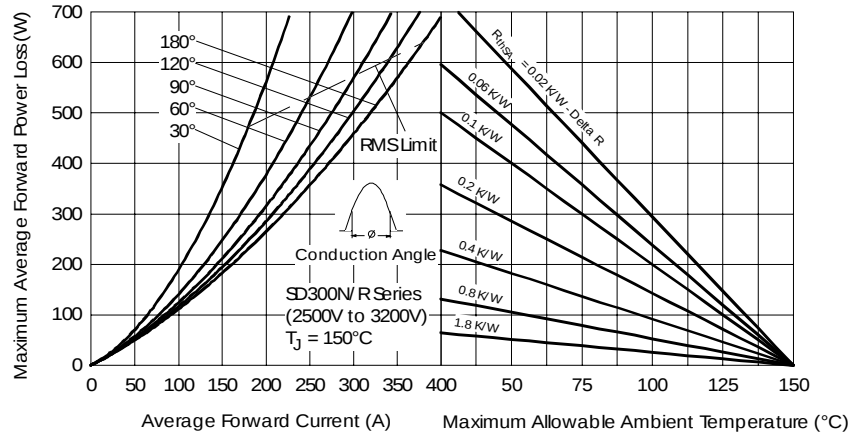


Fig. 7 - Forward Power Loss Characteristics

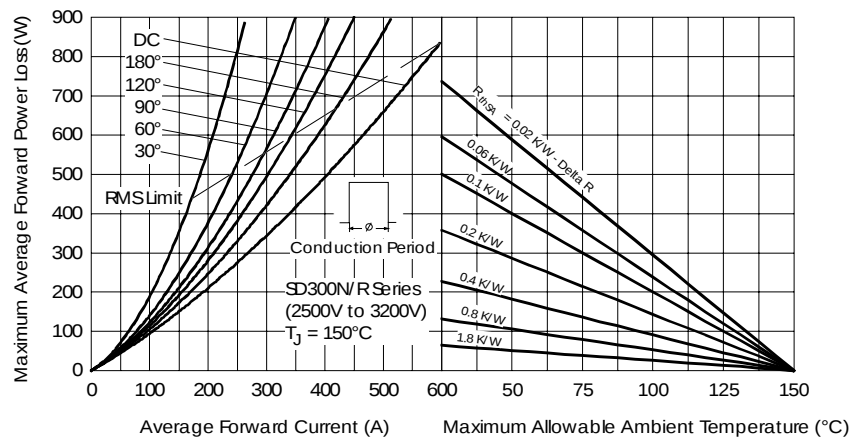


Fig. 8 - Forward Power Loss Characteristics

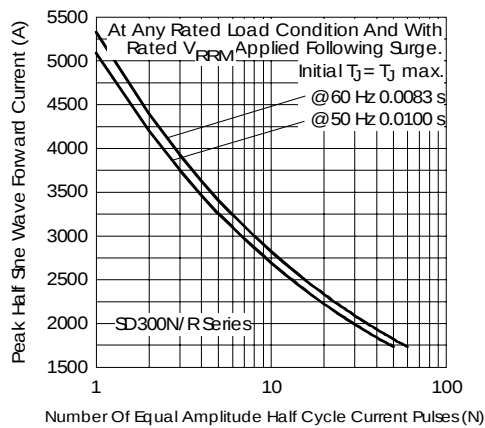


Fig. 9 - Maximum Non-Repetitive Surge Current

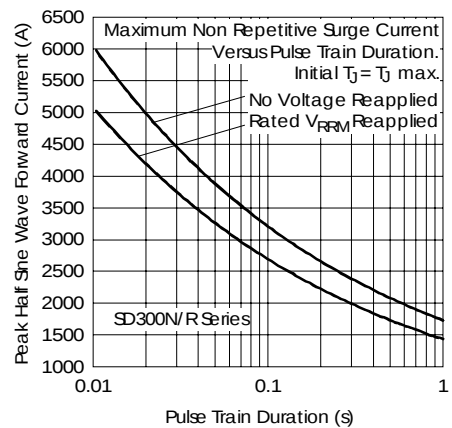


Fig. 10 - Maximum Non-Repetitive Surge Current

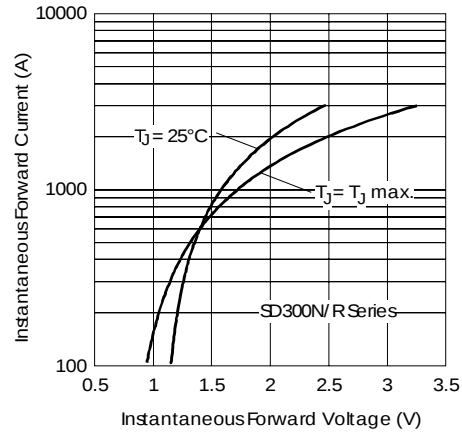


Fig. 11 - Forward Voltage Drop Characteristics

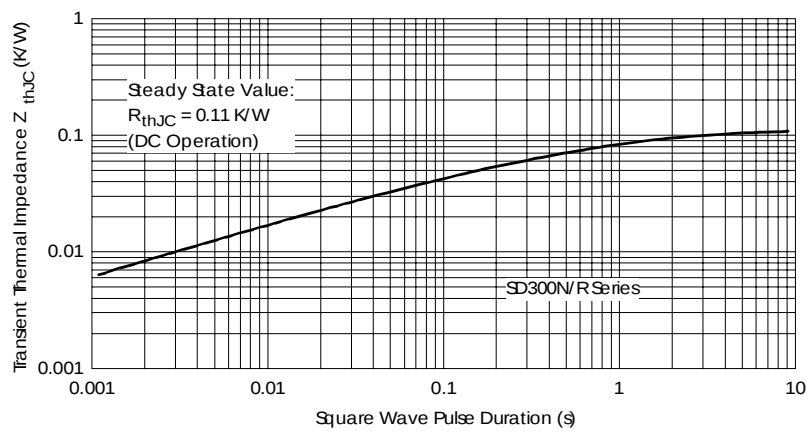


Fig. 12 - Thermal Impedance Z_{thJC} Characteristics

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7309

Visit us at www.irf.com for sales contact information. 03/03