

**TAYCHIPST**

SWITCHING TYPE POWER SUPPLY APPLICATION

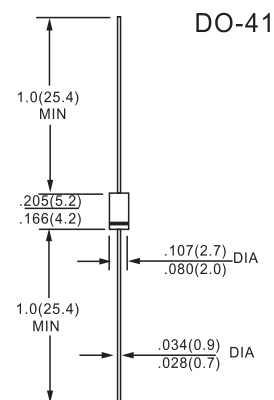
05NU41

1000V

0.5A

FEATURES

- Average Forward Current
- Repetitive Peak Reverse Voltage
- Very Fast Reverse-Recovery Time

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	1000	V
Average Forward Current	$I_{F(AV)}$	0.5	A
Peak One Cycle Surge Forward Current(Non-Repetitive)	I_{FSM}	10(50Hz)	A
		11(60Hz)	
Junction Temperature	T_j	-40~150	°C
Storage Temperature Range	T_{stg}	-40~150	°C

ELECTRICAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	TYPE	MAX	UNIT
Peak Forward Voltage	V_{FM}	$I_{FM} = 0.5A$	—	—	3.0	V
Repetitive Peak Reverse Current	I_{RRM}	$V_{RRM} = 1000V$	—	—	100	uA
Reverse Recvery Time	t_{rr}	$I_F = 1A$, $di/dt = -30A/us$	—	—	100	ns
Forward Recovery Time	t_{fr}	$I_F = 1A$	—	300	—	ns



RATINGS AND CHARACTERISTIC CURVES

05NU41

