

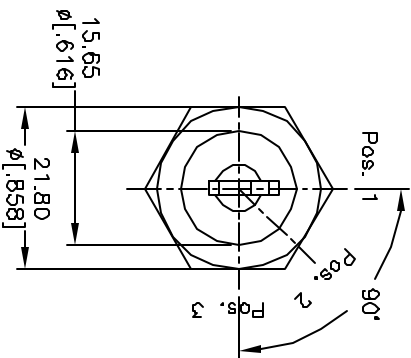
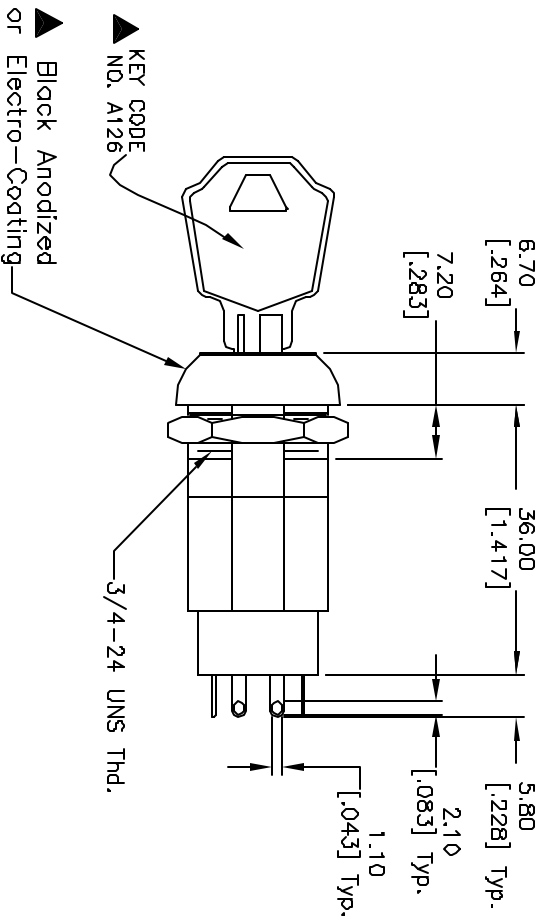


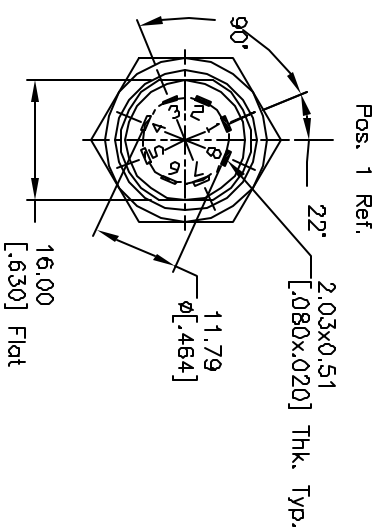


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 4A @125VAC/28VDC, 2A @250VAC
5. CONTACT RESISTANCE: 10 milliohms Typical
6. DIELECTRIC STRENGTH: 1kV RMS min. at sea level
7. ELECTRICAL LIFE: 10,000 make-and-break cycles
at full load.
8. KEYS: Nickel plated with code no. A126 (2 Keys)
9. ELECTROSTATIC DISCHARGE (ESD)
RESISTANCE: 15kV DC min. @SEA LEVEL; Bushing
to terminals



RECOMMEND PANEL LAYOUT



Key Pull: Pos. 3

CIRCUIT: SP (45° INDEXING)
CONTACT CONFIGURATION

SWITCH FUNCTION		
CONNECTED TERMINAL #		
POS. 1	POS. 2	POS. 3
8-1	1-2	2-3

TITLE			
KD130C-ESD Blk. Anti-Static (Key Code No. A126)			
E-SWITCH®			
A	10566	RELEASED FOR PRODUCTION	3/13/00
REV.	ECN No.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
MM			
CHKD			
SCALE	DATE	DR	REV
1.5:1	3/13/00	MM	A
K200254			