FEELING TECHNOLOGY

FD115CH
FD115CA

Smart motor driver with embedded Hall sensor

Features

Halogen Free

- Motor driver with integrated Hall sensor
- Lock-shutdown protection & auto-restart function
- Precise magnetic switching thresholds
- “Soft-switch” phase-switching technique to reduce vibration and acoustic noise
- Thermal shutdown protection
- Built-in FG(frequency generation) signal output
- Available in SIP-5L, SOT89-5L packages
- For 12V systems

General Description

FD115CH/FD115CA is a two coil motor driver with embedded Hall sensor. It integrates the motor driver with the Hall sensor, which simplifies the PCB(printed circuit board) design and make the fabrication of small-size motors possible.

Lock-shutdown and auto-restart function keeps the motor from being over-heated and restarts the motor after being locked.

“Soft-switch” phase-switching technique is used to reduce the vibration and acoustic noise.

Thermal-shutdown protection ensures the motor driver to operate under specified temperature ranges.

All the protection mechanisms mentioned above combine to provide a complete protecting scenario for the motor system, keep the motor system from possible damages and guarantee correct operations.

Block Diagram

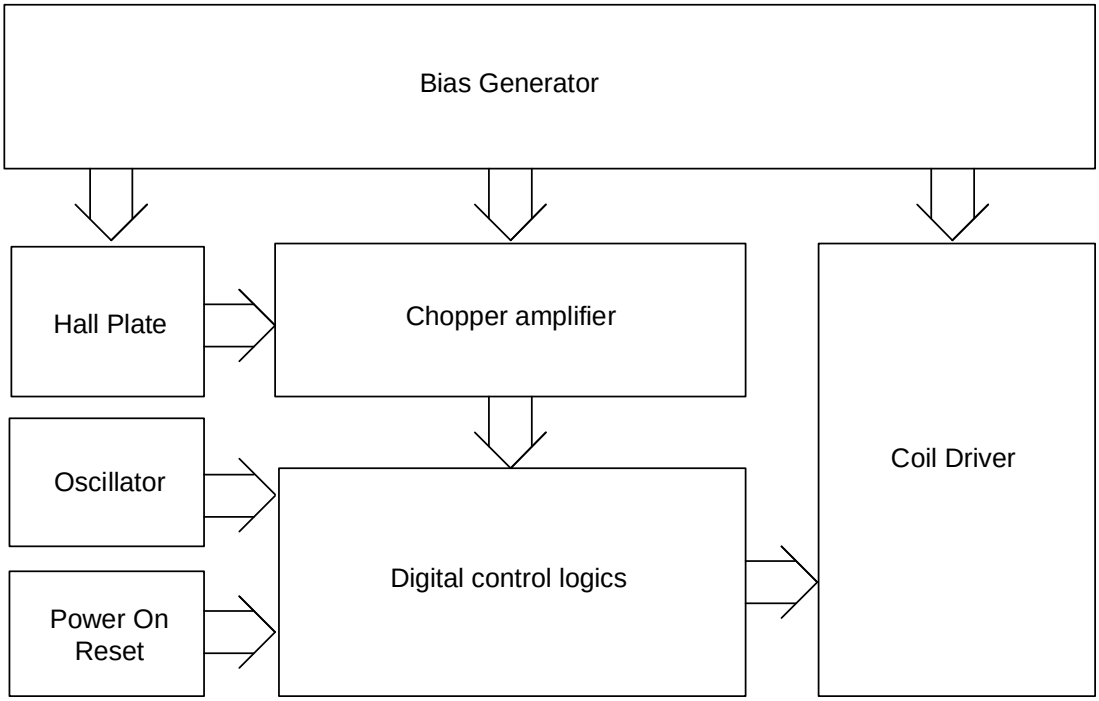


Figure.1

This datasheet contains new product information. Feeling Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sales of the product.

Pin Connection **Marking Distinguish**

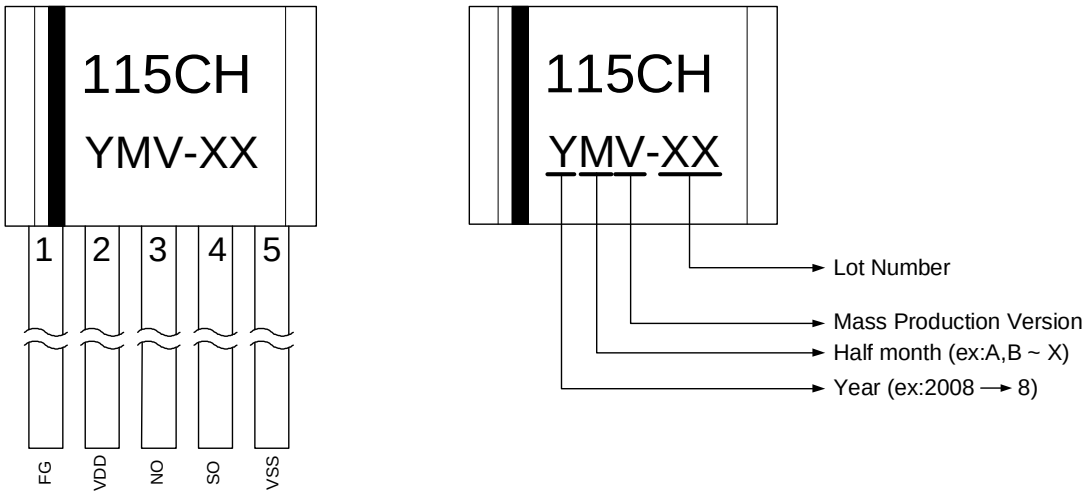


Figure.2

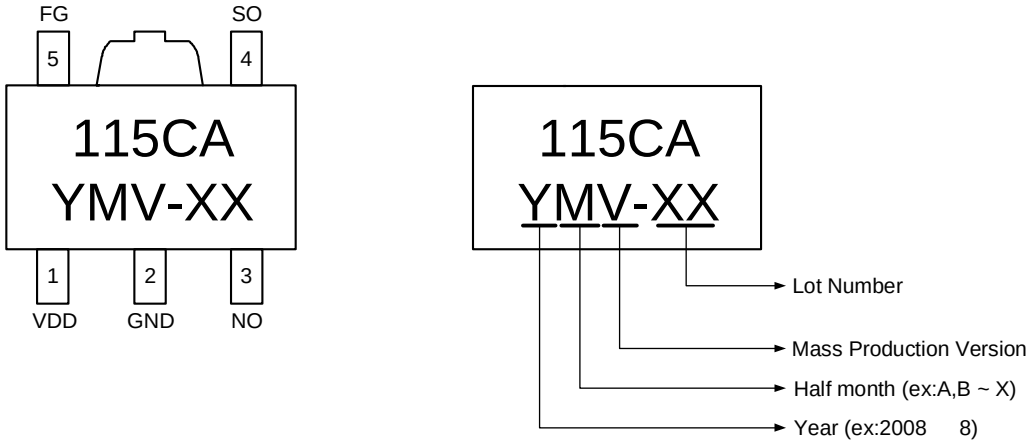


Figure.3

Pin Descriptions

Name	I/O	FD115CH	FD115CA	Description
VSS	G	5	2	Ground
SO	O	4	4	Driver output
NO	O	3	3	Driver output
VDD	P	2	1	Positive power supply
FG	O	1	5	Frequency generation signal

Legend: I=input, O=output, I/O=input/output, P=power supply, G=ground

Functional Descriptions

Refer to the block diagram (Figure.1), FD115CH/FD115CA is composed of the following building blocks:

- Bias generator

The bias generator provides precise, temperature- and process-insensitive bias references for the analog circuit blocks. These references guarantee proper operation of the IC under all conditions specified in this specification.

- Oscillator

The built-in oscillator provides the clock signal for the digital control logics

- Power-on Reset

Used to detect the power-up ramp and reset the digital circuits to achieve correct operation as soon as the power is ready.

- Chopper Amplifier


To achieve a higher magnetic sensitivity the chopper amplifier structure is adopted in this design. Use of this structure dynamically removes both the offset and flicker noise at the same time.


- Digital control logics
  - Hall sensor part – generates controlling signals for the Hall sensor.
  - Coil driver part – generates controlling signals for the Coil driver.


Absolute Maximum Ratings

Parameter	Symbol	Conditions	Values			Unit
			min.	Typ.	max.	
Operating Temperature	T_{OP}	-	-20		105	℃
Storage Temperature	T_{ST}	-	-40		150	℃
Output clamp Voltage	V_C		25		27	V
DC Supply Voltage	V_{DD}	-			18(1)	V
Supply Current	I_{DD}	-			6	mA
Continuous Current	$I_{O(CONT)}$				600	mA
Hold Current	$I_{O(HOLD)}$				900	mA
Peak Current	$I_{O(PEAK)}$	<100μs			1200	mA
Junction temperature	T_J				180	℃
Power Dissipation	P_D	SIP-5L			1200	mW
		SOT89-5L			1400	
Thermal Resistance	θ_{JC}	SIP-5L		62		℃/W
		SOT89-5L		55		
	θ_{JA}	SIP-5L		104		℃/W
		SOT89-5L		98		
Magnetic Flux Density	B				Unlimited	Gauss
IR-Reflow Lead Temperature		10sec			260	℃

Note 1: *V_{DD}=18V,If V_{BEMF} is lower than the output clamp voltage (Vc).*

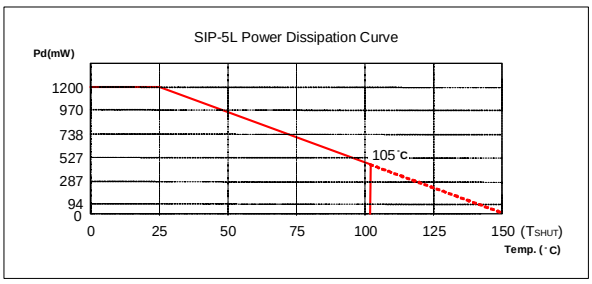

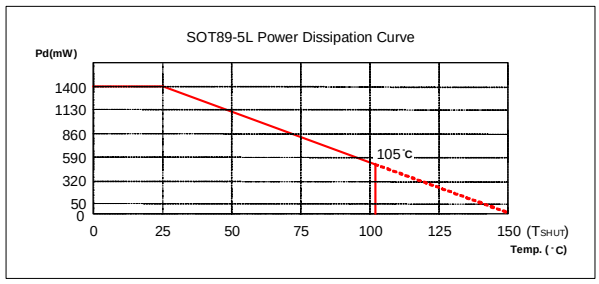

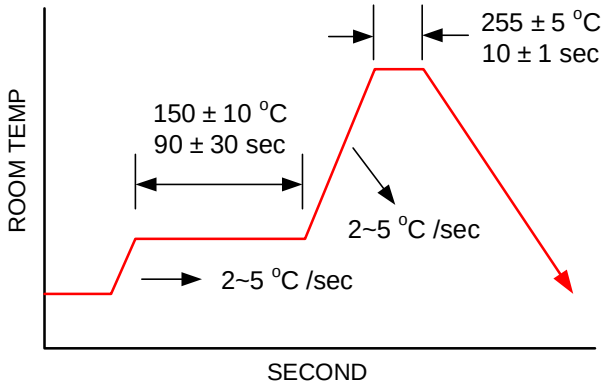

IR-ReFlow Soldering Condition

Recommended Operating Conditions

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Supply Voltage	V_{DD}	-	3.0		16(1)	V
Operating Temperature Range	T_A	-	-20		85	℃

Note 1: *V_{DD}=16V,If V_{BEMF} is lower than the output clamp voltage (Vc).*

Electrical Characteristics V_{DD}=12.0V, T_A=25℃ (unless otherwise specified)

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Average Supply Current(no load)	I_{DD}			2.5		mA
On resistance (NO, SO pin)	R_{DSON}	T_A=25 °C, Iout=300mA		1		Ohm
Thermal Shutdown Threshold	T_{SHUT}			165		℃
Locked Rotor Period	T_{ON}			0.4		s
Locked Rotor Period	T_{OFF}			2.8		s

Magnetic Characteristics


Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Operate Points	B_{OP}		5	20	40	G
Release Points	B_{RP}		-5	-20	-40	G

Driver output vs. Magnetic Pole

Parameter	Test Conditions	NO	SO
North pole	B < Brp	High	Low
South pole	B > Bop	Low	High

Note: *The magnetic pole is applied facing the branded side of the package*

Hysteresis Characteristics

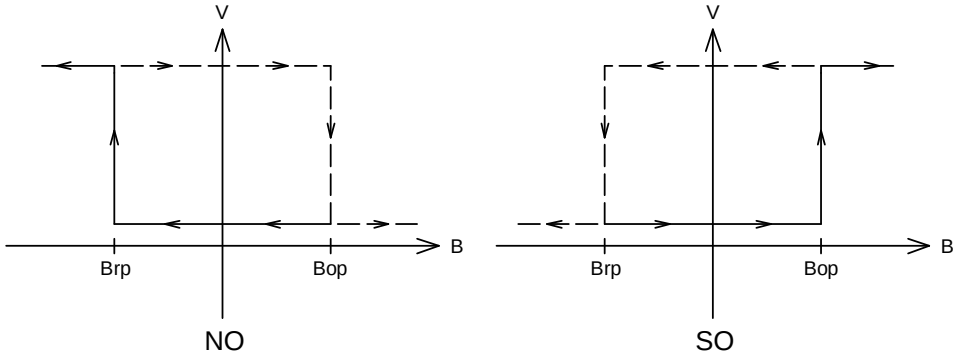

Performance Graphs

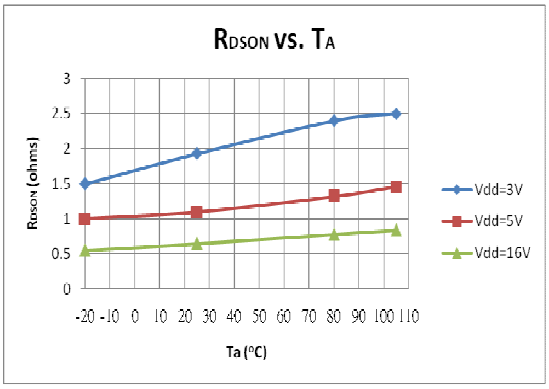


Figure.4

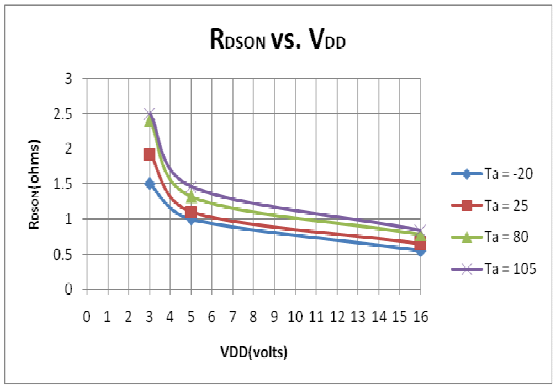


Figure.5

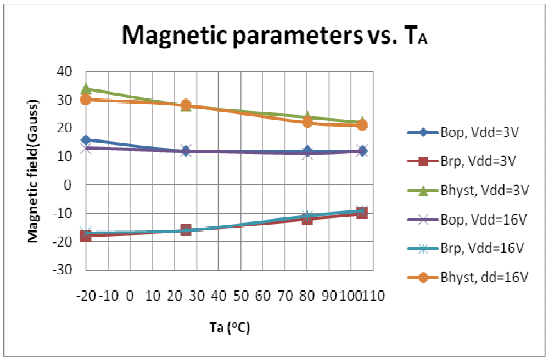


Figure.6

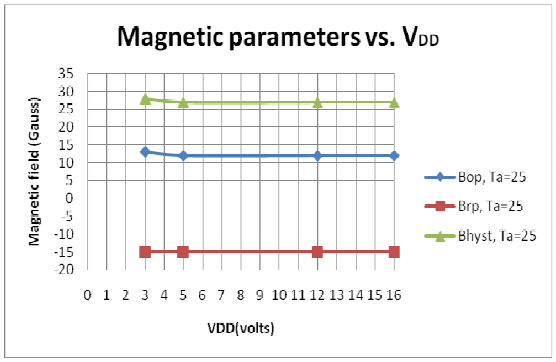


Figure.7

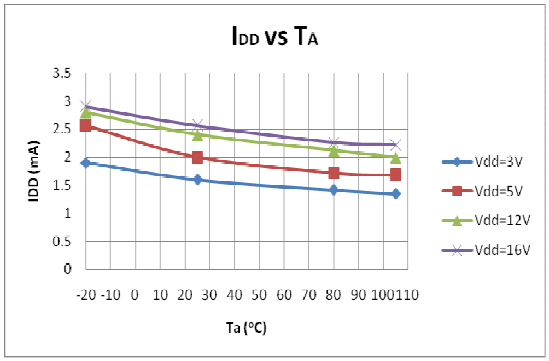


Figure.8


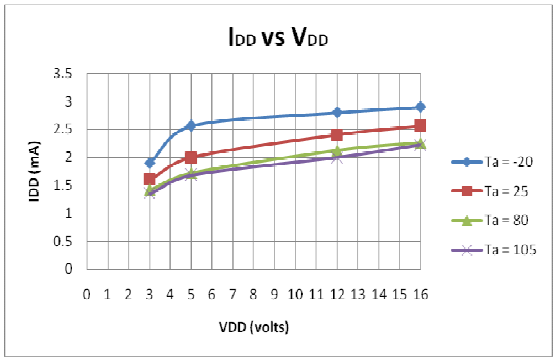


Figure.9

Lock shutdown – Restart Timing Description:

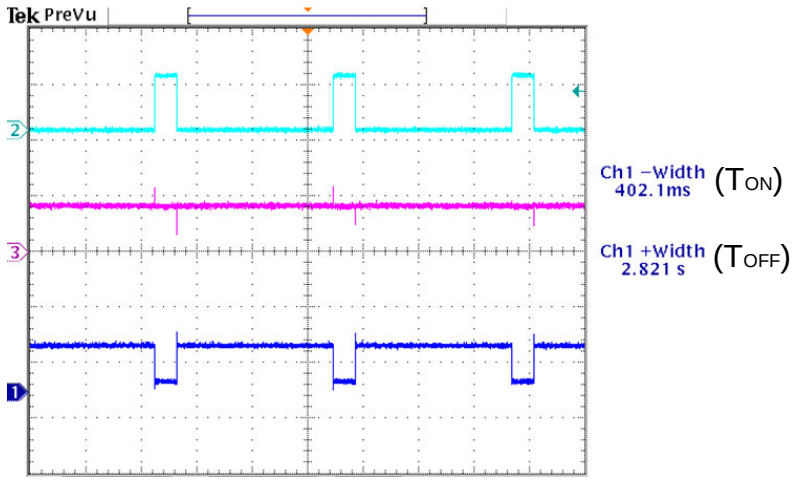

Channel2: V_{DD} pin current waveform
Channel3: Output (SO pin) voltage waveform
Channel1: Output (NO pin) voltage waveform

Note: *The North pole (B > Bop) is applied facing the branded side of the package.*

Application Circuit Reference

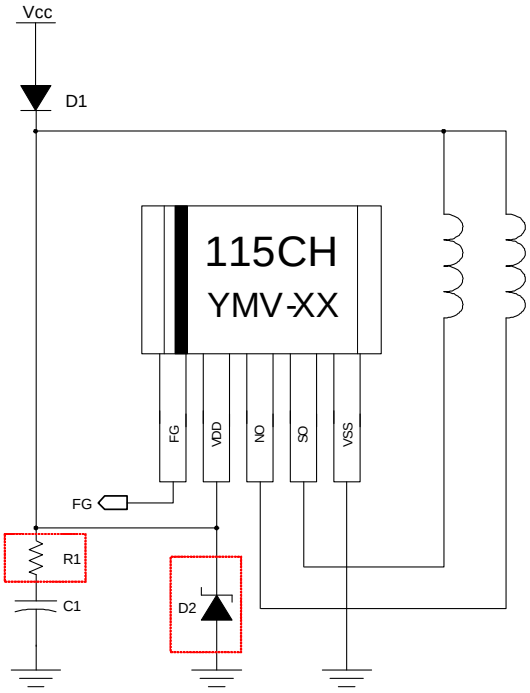


Figure.10


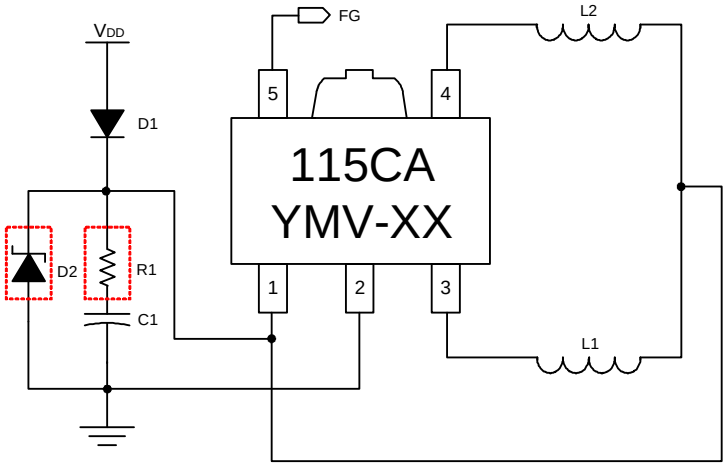


Figure.11


Note: *C1=1uF, R1=2~5 Ω(option),D2(option) breakdown voltage 16V*

Package Dimension (Unit: mm)


SIP-5L(Halogen Free)

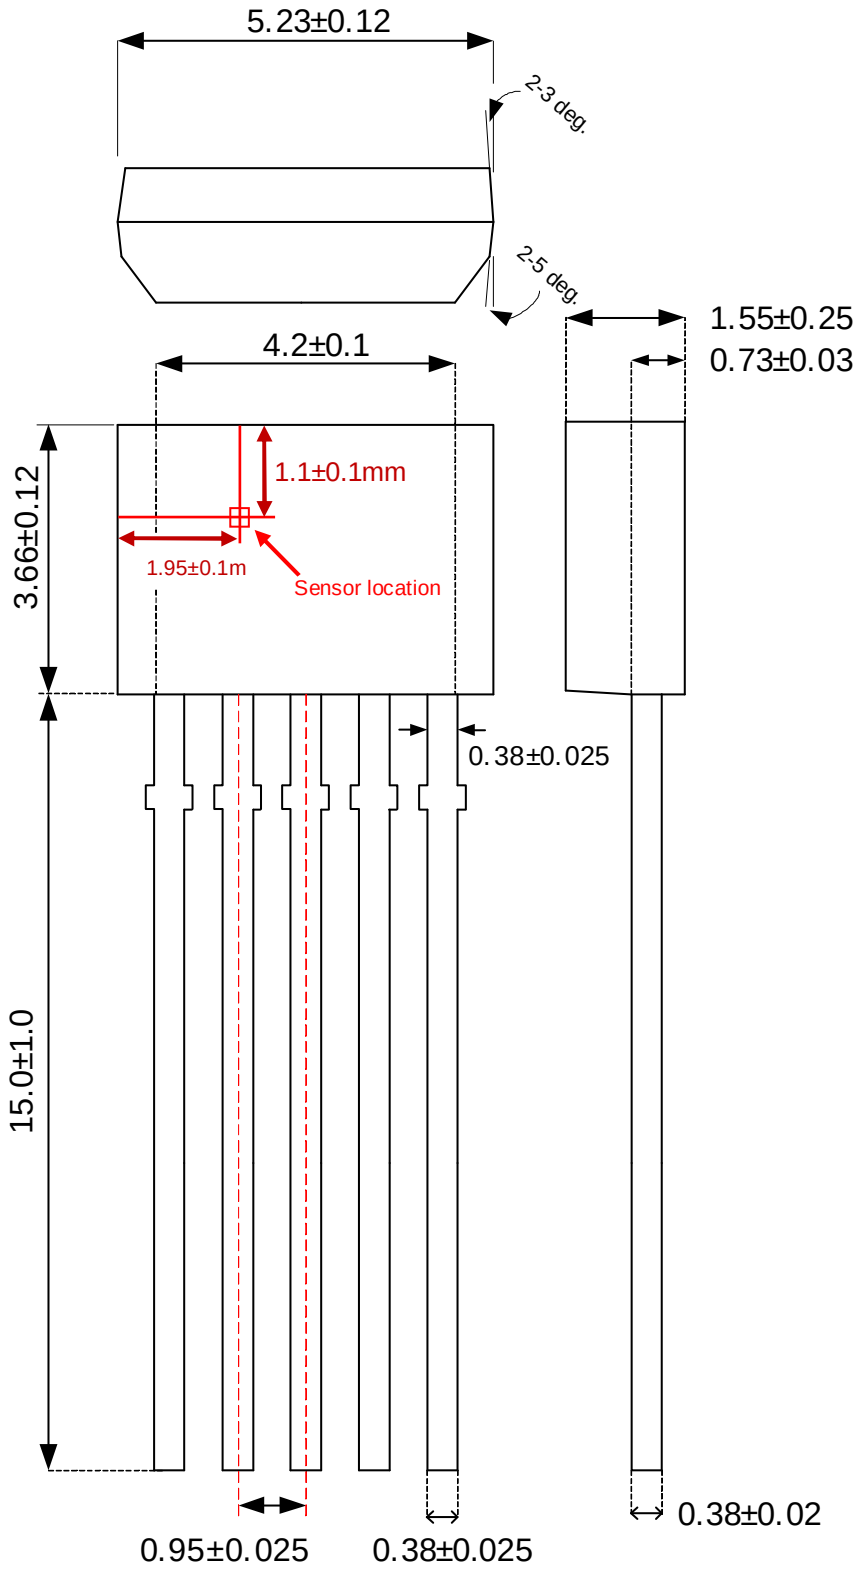


SOT89-5L(Halogen Free)

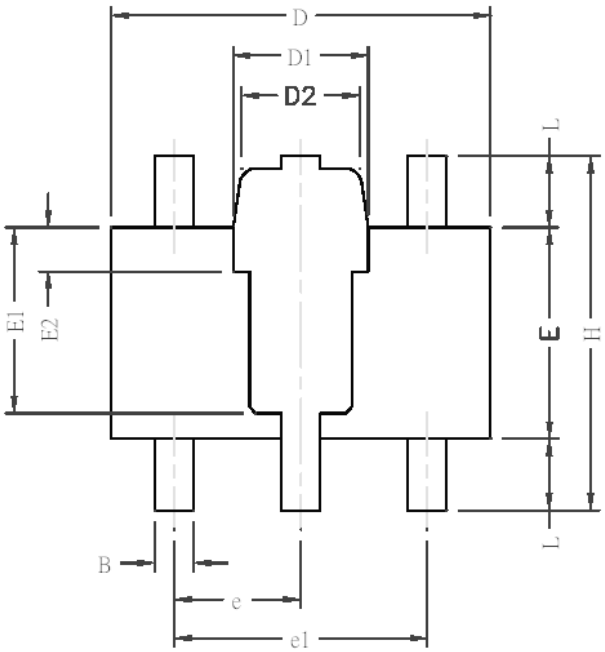


REF.	DIMENSIONS	
	Millimeters	
	Min.	Max.
A	1.40	1.60
B	0.40	0.52
c	0.35	0.41
D	4.40	4.60
D1	1.50	1.70
D2	1.30	1.50
E	2.40	2.60
E1	2.20 REF.	
E2	0.52 REF.	
e	1.50 REF.	
e1	3.00 REF.	
F	5° TYP.	
H	4.05	4.25
L	0.80	–

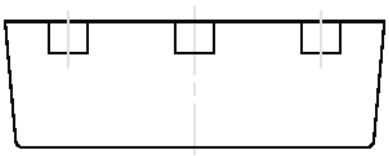

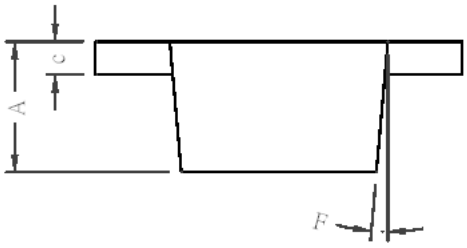


Sensor Location:

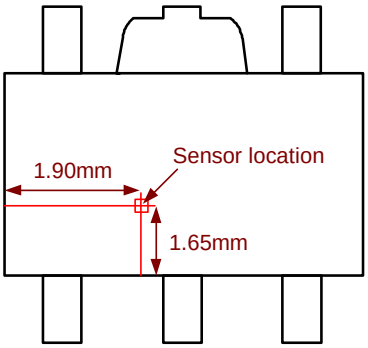


TOP VIEW

Packing Specification

SOT89-5L

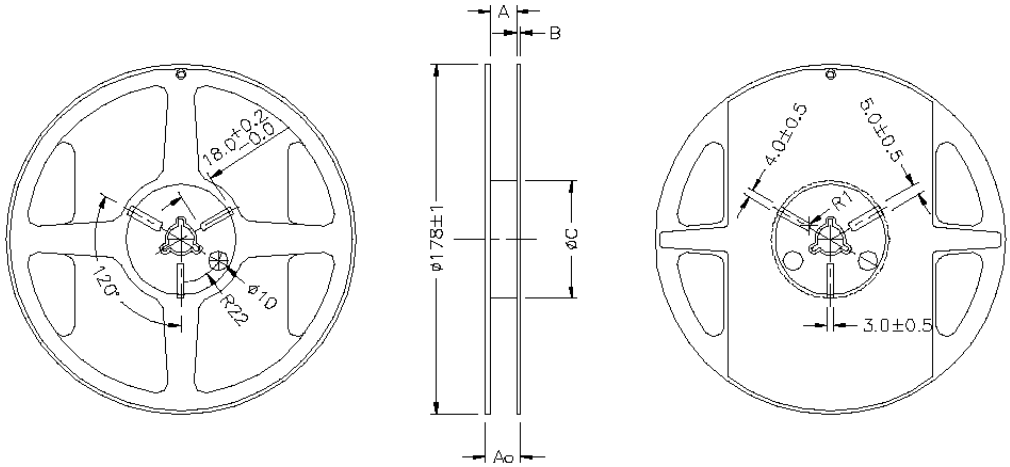






Width of carrier tape	8	12	16				
A±0.05	9.0	13.0	17.0				
Ao±0.05	12.0	16.0	20.0				
B	1.5	1.5	1.5				
øC $^{+1}_{0}$	60	60	60				

NOTE :

1. Material : Anti-static polystyrene.
2. Surface resistivity 10 ^{5}ohm/square

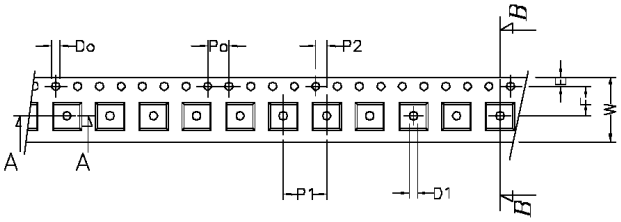





A–A SECTION

symbol	Ao	Bo	Ko	Po	P1	P2	T
Spec	4.85±0.1	4.45±0.1	1.85±0.1	4.0±0.1	8.0±0.10	2.0±0.05	0.254±0.02
symbol	E	F	Do	D1	W	10Po	
Spec	1.75±0.1	5.5±0.05	1.50±0.1	1.5±0.25	12.0 $^{+0.3}_{-0.1}$	40.0±0.2	

Packing Quantity Specifications

1000 ea / 1 Reel

4 Reels / 1 INSIDE BOX

Order Information

Part Number	Operating Temperature	Package	Description	MOQ
FD115CH-G1	-20 °C to +85 °C	SIP-5L	±20G (B)	1Kea
FD115CA-G1	-20 °C to +85 °C	SOT89-5L	±20G (B)	1Kea/real