
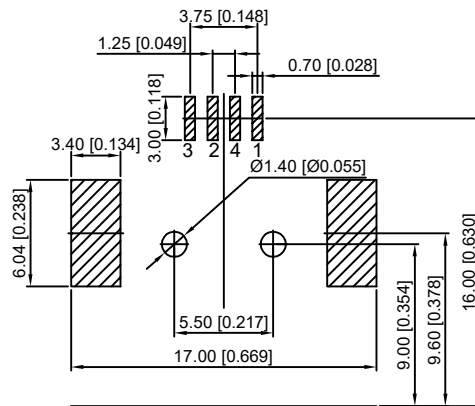


Specifications:
 Current Rating:1.0A AC,DC
 Voltage Rating:30V AC,DC
 Contact Resistance:30m Ohm Max
 Insulation Resistance:1,000M Ohm Min
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-40°C to +105°C
 Materials:
 Insulator:Nylon 9T UL94V-0, COLRO: Nature
 Contact:Phosphor Bronze
 Plating: Au Plated on Contact Area,
 Tin Plated on Solder Tail.
 Ni Plated on Under overall.
 Shell:Brass, Nickel Plated

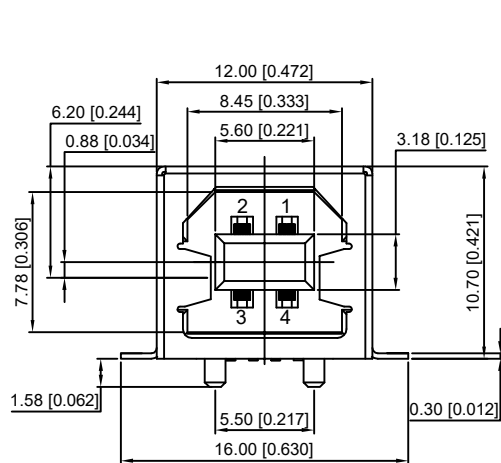

RECOMMENDED P.C.B LAYOUT
 (TOLERANCE:±0.05)

U241-04XN-2XS1-002

1: Au 1U" MIN
 2: Au 15U" MIN
 3: Au 30U" MIN

1: WITH
 2: WITHOUT

B: BLACK
 U: BLUE
 W: WHITE
 C: CREAM-COLOR

1: PBT
 2: LCP
 3: PA

					DSND		DATE		SCALE: N/A	MODEL TYPE: USB 2.0		
					DWN		DATE		VIEW:	PART NO.:		
					CHKD		DATE		UNIT: mm/in	DWG NO.:		
					APPD		DATE		SIZE: A4	U241-04XN-2XS1-002		
					UNSPECIFIED TOLERANCES					WEIGHT	SHEET	REVISION
					KXB INDUSTRIAL PRECISION CO., LIMITED					1.0g	1/1	A0
Δx					ANGLAR		±5°					
Δx					L ≤ 4		±0.2					
Δx					4 < L ≤ 16		±0.3					
Δx					16 < L ≤ 63		±0.4					
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63		±0.5					
REVISIONS												
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn												