

# LS-320

## 32" Industrial LCD Monitor

### Features

- Flexible, low cost and high performance
- For kiosk, gaming, amusement, digital signage application
- 32" 16:9 FHD TFT LCD display
- Premium MVA with wide-view angle
- For both landscape and portrait installation



### Specifications

LCD panel	Size	32" (16:9)
	Backlight	LED (30K hours)
	Panel type	Premium MVA
	Pixel pitch	0.36375 mm
	Active area	698.4x392.85 mm
	Brightness*	350 cd/m2
	Contrast	3000 : 1
	Viewing angle	178 / 178 degree
	Resolution	1920 x 1080
	Display color	16.7M (8 bit)
	Response time	10 mS (gray-gray)
Video	Hor. frequency	30 ~ 86 KHz
	Ver. frequency	60 / 70 Hz
	Pixel rate	165 MHz

\* Higher brightness is on demand.

Signal input	15 pin D-sub connector for VGA	
OSD adjustment	Power, Enter, Left, Right, Auto	
Power	AC input	100~240Vac, 1A
	Inrush current	30A (cold start)
	Consumption	60W
	Management	VESA DPMS
Mounting	200x200mm VESA mount	
Dimension	767 (W) x 457 (H) x 107.9 (D) mm	
Net weight		
Package	Packing	1 pcs / carton
	Carton size	
	Container loading	
Temperature	Operation	0 ~ 50 degree C
	Storage	-30 ~ 70 degree C

### Ordering information


#### Model selection

LS-320-XYZ	<b>X:</b> Panel selection	<b>Y:</b> Input selection	<b>Z:</b> Touch selection
	<b>0:</b> Standard, chosen	<b>0:</b> Standard, VGA/DVI	<b>0:</b> Standard, none
	<b>A:</b> Specified LCD	<b>V:</b> VGA only	<b>G:</b> Glass
	<b>B:</b> Specified LCD	<b>H:</b> VGA/DVI/HDMI	<b>I:</b> IR
	<b>...etc.</b> Specified LCD	<b>P:</b> DVI/HDMI/DP	<b>S:</b> SAW
	<b>S:</b> VGA/DVI/S-video	<b>P:</b> Projective capacitive	

#### Optional accessories

- \* Power cord            1.8M power cord, US / EU
- \* Signal cable         1.8M VGA cable, 1.8M DVI cable

### Product drawing

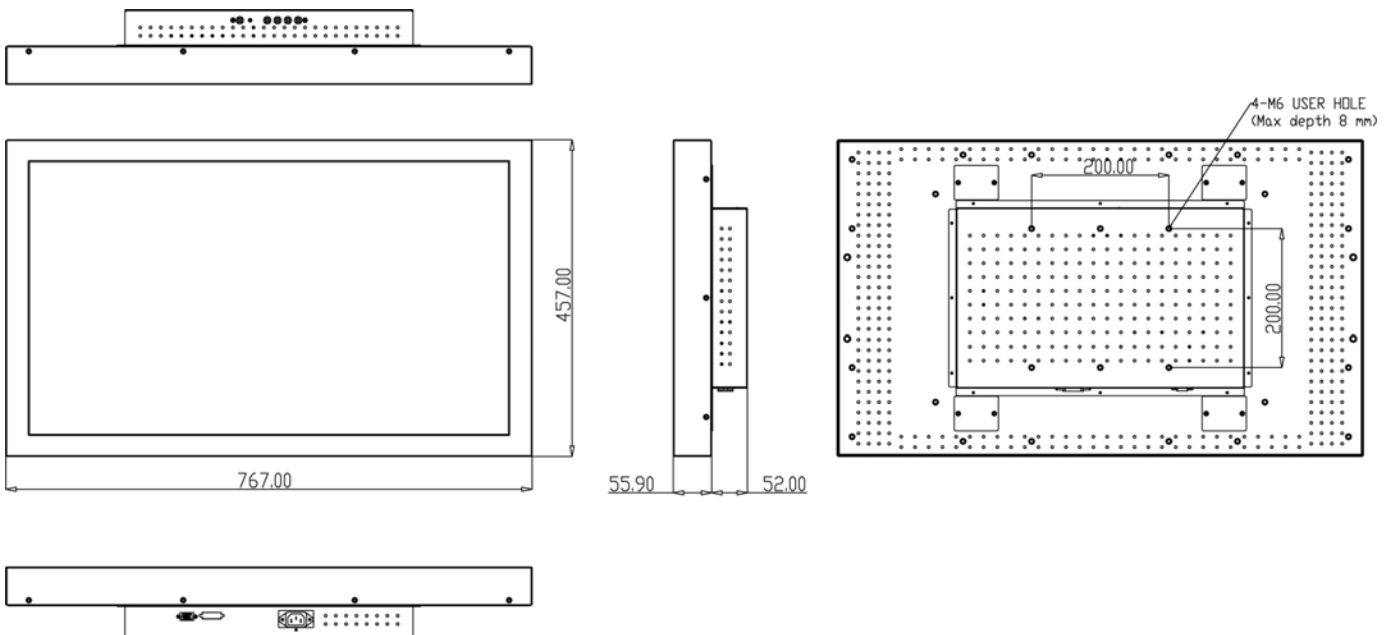

\* All specification and photos are subject to change without notice.