
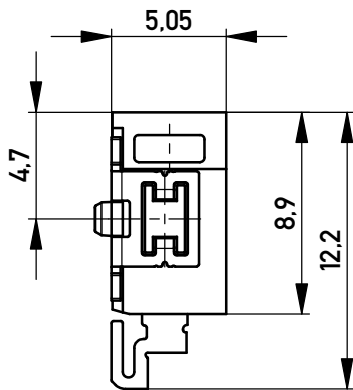
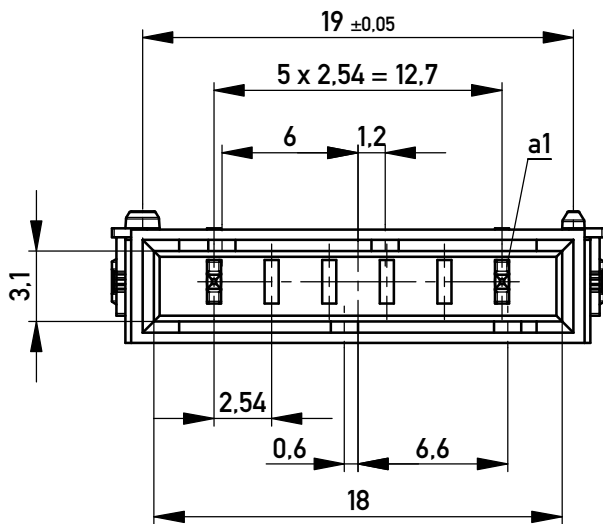
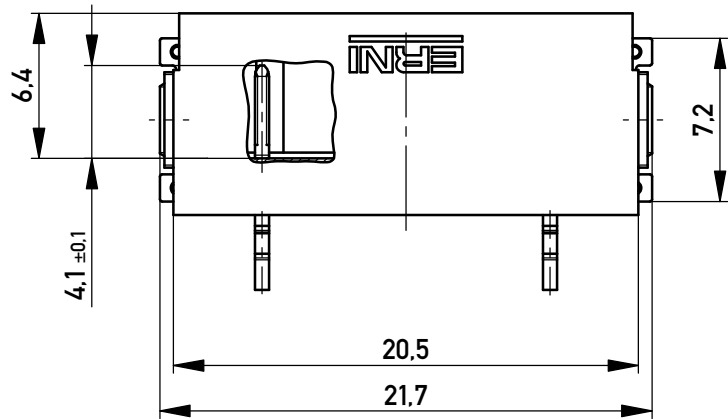


Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

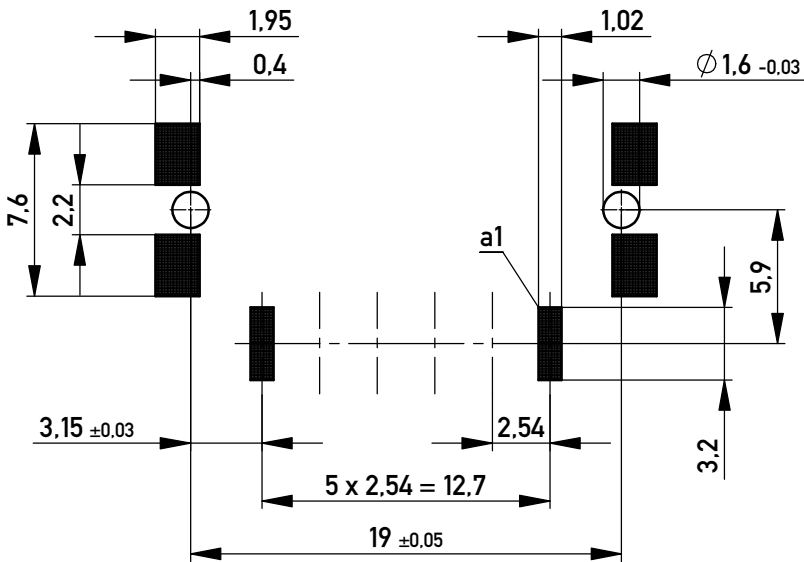



Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 μm
Terminal Area 4-6 μm tin plating

Koplanarität der Anschlüsse $\leq 0.1 \text{ mm}$
Coplanarity Area of Termination $\leq 0.1 \text{ mm}$

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 440 Stück
Packaging unit: 440 pcs

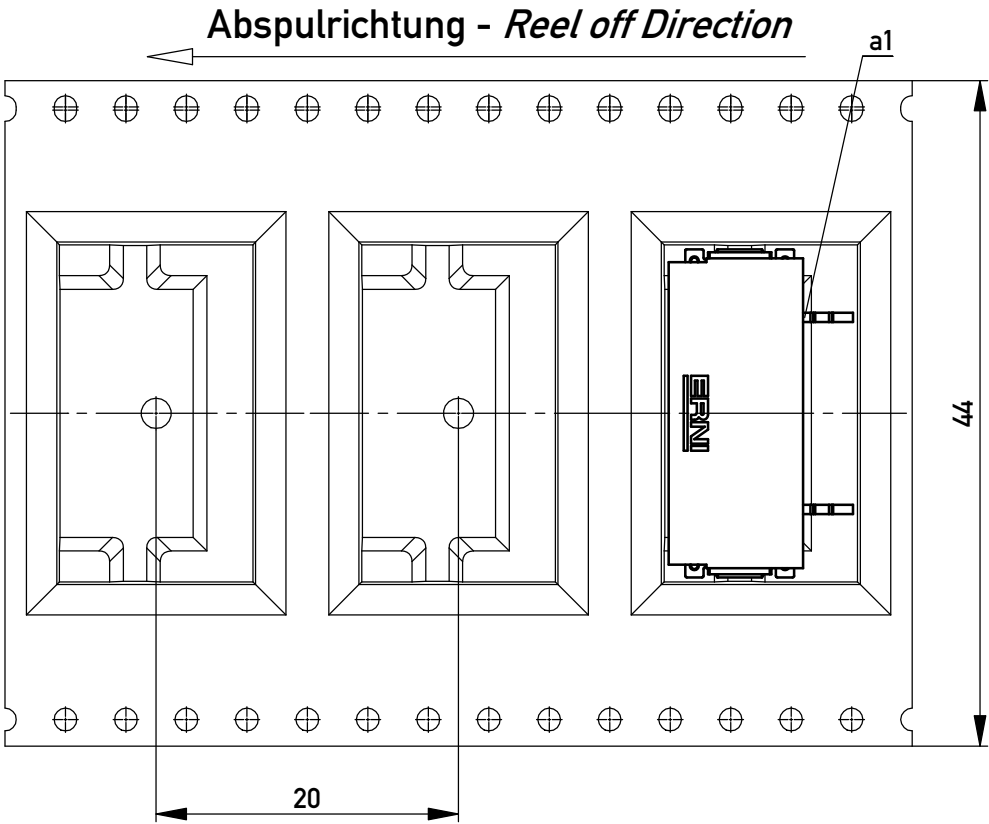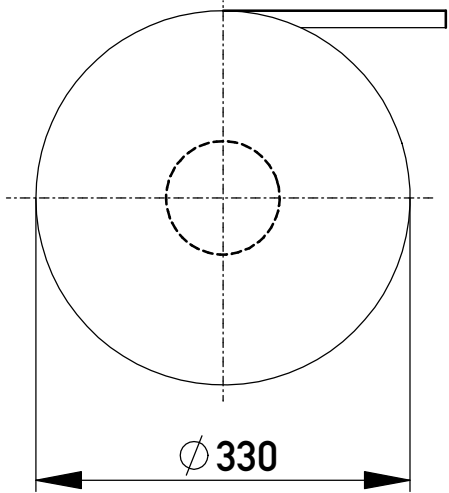


Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Information:
Codierung schwarz - coding black
Pos.: 2, 3, 4, 5, unbestückt - not assembled

All rights reserved.
Only for Information.
To ensure that this is the latest
version of this drawing, please
contact one of the ERNI companies
before using.

Tolerances



Scale 3:1

Subject to modification without
prior notice.
Drawing will not be updated.

www.ERNI.com

Designation
M 2,54 SRC-A 6/2-polig

101903880001

K

A3

Index

Date

Class

SRCA