



MATERIAL NUMBER	ENGINEERING PART NUMBER	COUPLING NUT MATERIAL	COUPLING NUT FINISH
1300170029	1A5006-34	BRASS	NICKEL PLATED
1300170030	1A5006-348	STAINLESS STEEL	PASSIVATED

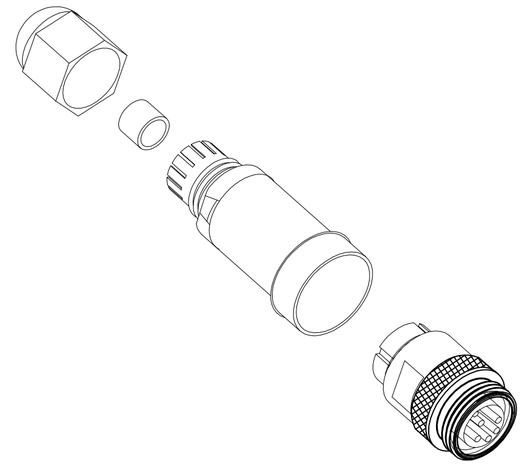


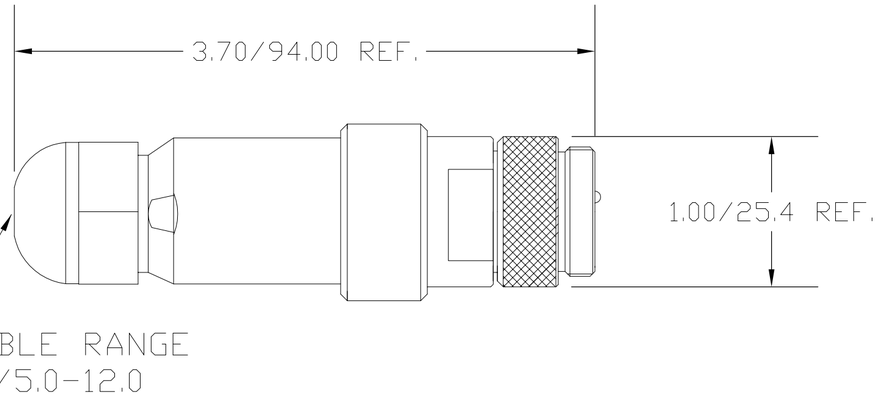

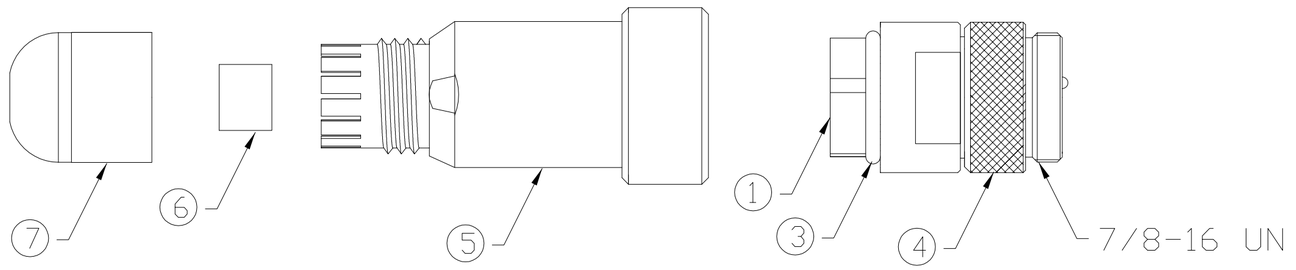

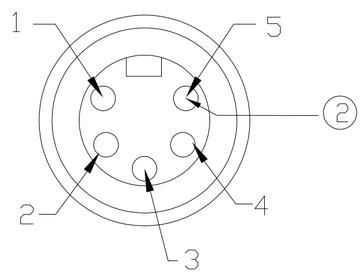

MALE FACE VIEW



WIRING CHART

VOLTAGE RATING	600VAC/VDC
AMPERAGE RATING	8 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	PIN CONTACTS	COPPER ALLOY	GOLD PLATED
3	O-RING	NITRILE	BLACK
4	COUPLING NUT	SEE CHART	SEE CHART
5	MOLDED BODY	NYLON	BLACK
6	GROMMET	NITRILE	BLACK
7	CORD GRIP BODY	NYLON	BLACK

RELEASE
EC NO: WNA2010-0081 8/25/09
DRWN: TWOLDEGE
CH'KD: BWOODMAN
APPR: JFMURPHY 2009/08/27

DESCRIPTION

REV: A

QUALITY SYMBOL
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±----	±---
3 PLACES	±.005	±.005
2 PLACES	±.013	±.010
1 PLACE	±.025	±.020
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: ----

SCALE: ----

DESIGN UNITS: INCH

THIRD ANGLE PROJECTION

DRAWN BY DATE: TWOLDEGE 2009/08/25

CHECKED BY DATE: BWOODMAN 2009/08/25

APPROVED BY DATE: JFMURPHY 2009/08/26

TITLE: MINI CHANGE ATTACHABLE 5-POLE MALE ST .20"-.48" CABLE RANGE

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART

DOCUMENT NO.: SD-130017-009

SHEET NO.: 1 0F 1

SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION