NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE 74-0000.

2. MATERIAL SPECIFICATIONS: BRASS PER ASTM B16.


3. FINISH SPECIFICATIONS:
   .000030 MIN. GOLD PER ASTM B488 OVER .000050 MIN. NICKEL PER AMS QQ-N-290.


4. ELECTRICAL SPECIFICATIONS:
   CURRENT RATING: 30 AMPS MAX


5. SUGGESTED FOR USE WITH 12 GA WIRE OR EQUIVALENT.

6. REFER TO CAP10-01 FOR CABLE ASSEMBLY PROCEDURE.

REV	DESCRIPTION	BY DATE	APPD
B	REVISED PER ER11418	DAO 01/07/09	DAO



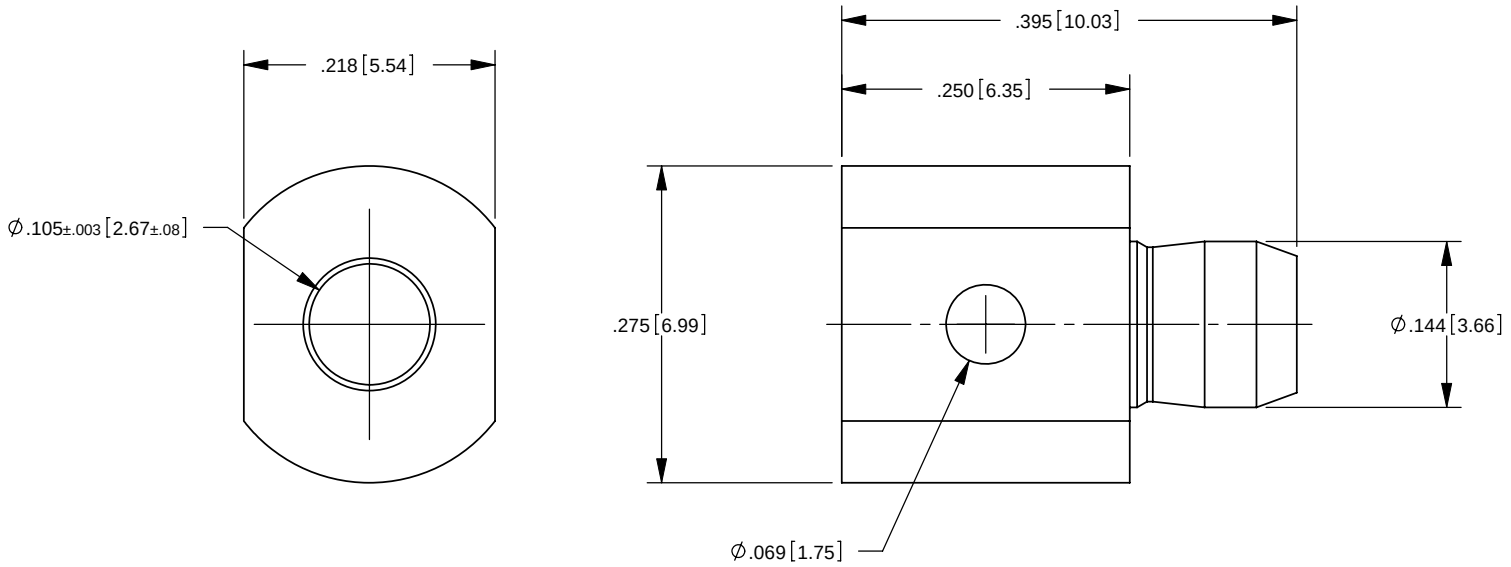

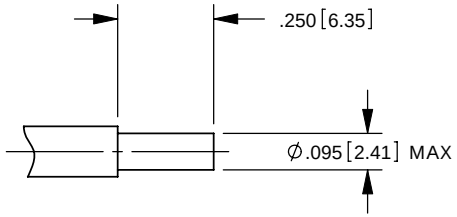

RECOMMENDED CABLE TRIM DIMENSIONS
SCALE: 2:1

CATALOG P/N: 01381

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMAL: .XX [X.X] ± .01 [0.3]
.XXX [X.XX] ± .005 [0.13]
.XXXX [X.XXX] ± .XXXX
ANGLES: ± 2° SCALE: 6:1

WINCHESTER ELECTRONICS
Winchester Electronics Corporation
62 Barnes Industrial Road North
Wallingford, Connecticut 06492

CUSTOMER SALES DRAWING

THIRD ANGLE

POWER SNAP
STRAIGHT MALE
CABLE MOUNT

	DRAWN	DATE	APPROVED	DATE
	LMD	02/15/06	BL	09/19/08
	APPROVED	DATE	APPROVED	DATE
	WPM	09/18/08	XXX	XX/XX/XX

		SHT	OF	REV
A	SD01381	1	1	B

DMF029 B