
# PCB terminal block - SPT-THR 1,5/ 3-H-3,81 P26 - 1822875

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

PCB terminal block, Nominal current: 13.5 A, Nom. voltage: 160 V, Pitch: 3.81 mm, Number of positions: 3, Connection method: Push-in spring connection, Mounting: THR soldering, Conductor/PCB connection direction: 0 °, Color: black



The illustration shows the 10-position version

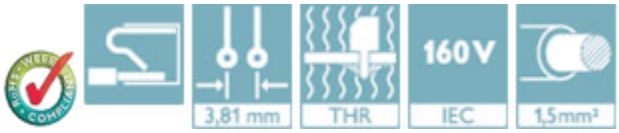


## Key Commercial Data

| | |
|---|---|
| Packing unit | 1 pc |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

## Technical data

### Dimensions

| | |
|---|---|
| Length | 13.6 mm |
| Pitch | 3.81 mm |
| Dimension a | 7.62 mm |
| Width | 11.62 mm |
| Height | 7.7 mm |
| Length of the solder pin | 2.6 mm |
| Pin dimensions | 0,7 x 0,3 |
| Pin spacing | 7 mm |
| Hole diameter | 1.1 mm |

### General

| | |
|---|---|
| Range of articles | SPT 1,5/..-H-THR |
| Insulating material group | IIIa |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated surge voltage (III/2) | 2.5 kV |

# PCB terminal block - SPT-THR 1,5/ 3-H-3,81 P26 - 1822875

## Technical data

### General

| | |
|---|---|
| Rated surge voltage (II/2) | 2.5 kV |
| Rated voltage (III/3) | 160 V |
| Rated voltage (III/2) | 160 V |
| Rated voltage (II/2) | 320 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current $I_N$ | 13.5 A |
| Nominal cross section | 1.5 mm² |
| Insulating material | LCP |
| Solder pin surface | Sn |
| Flammability rating according to UL 94 | V0 |
| Stripping length | 8 mm |
| Number of positions | 3 |

### Connection data

| | |
|---|---|
| Conductor cross section solid min. | 0.2 mm² |
| Conductor cross section solid max. | 1.5 mm² |
| Conductor cross section flexible min. | 0.2 mm² |
| Conductor cross section flexible max. | 1.5 mm² |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 0.2 mm² |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 1.5 mm² |
| Conductor cross section flexible, with ferrule with plastic sleeve min. | 0.2 mm² |
| Conductor cross section flexible, with ferrule with plastic sleeve max. | 0.75 mm² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 16 |

### Standards and Regulations

| | |
|---|---|
| Connection in acc. with standard | EN-VDE |
| Flammability rating according to UL 94 | V0 |

## Classifications

### eCl@ss

| | |
|---|---|
| eCl@ss 4.0 | 27141111 |
| eCl@ss 4.1 | 27141109 |
| eCl@ss 5.0 | 27141190 |
| eCl@ss 5.1 | 27141190 |
| eCl@ss 6.0 | 27261101 |
| eCl@ss 7.0 | 27440401 |

# PCB terminal block - SPT-THR 1,5/ 3-H-3,81 P26 - 1822875

## Classifications

### eCl@ss

| | |
|---|---|
| eCl@ss 8.0 | 27440401 |
| eCl@ss 9.0 | 27440401 |

### ETIM

| | |
|---|---|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002643 |
| ETIM 5.0 | EC002643 |

### UNSPSC

| | |
|---|---|
| UNSPSC 6.01 | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11 | 39121432 |
| UNSPSC 12.01 | 39121432 |
| UNSPSC 13.2 | 39121432 |

## Approvals

### Approvals

Approvals

UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approvals submitted

### Approval details

UL Recognized

| | B | D |
|---|---|---|
| mm²/AWG/kcmil | 24-16 | 24-16 |
| Nominal current IN | 10 A | 10 A |
| Nominal voltage UN | 300 V | 300 V |

# PCB terminal block - SPT-THR 1,5/ 3-H-3,81 P26 - 1822875

## Approvals

cUL Recognized

| | B | D |
|---|---|---|
| mm²/AWG/kcmil | 24-16 | 24-16 |
| Nominal current IN | 10 A | 10 A |
| Nominal voltage UN | 300 V | 300 V |


EAC

EAC


cULus Recognized

## Drawings


Drilling diagram




Dimensional drawing

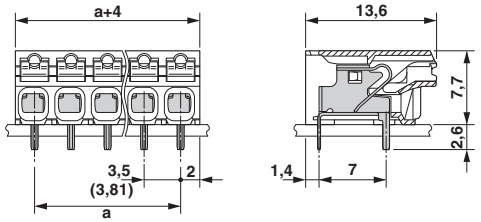


Diagram

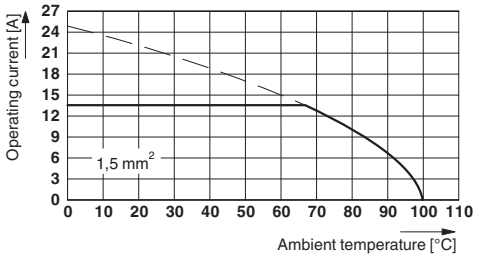


Type: SPT-THR 1,5/ 5-H-3,5(3,81) P26
Tested according to DIN EN 60512-5-2:2003-01
Reduction factor = 1

# PCB terminal block - SPT-THR 1,5/ 3-H-3,81 P26 - 1822875

Number of positions: 5

Phoenix Contact 2016 © - all rights reserved
http://www.phoenixcontact.com