
This document was generated on 04/05/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0505327325

Status: Active

Description: Parallel Splice for 10-12 AWG, Closed Uninsulated Barrel, Oxygen Free Copper, Length 8.50mm (.335")

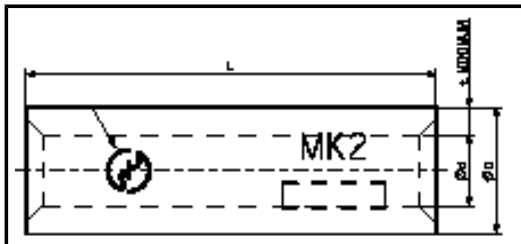

Series image - Reference only

Documents:

Drawing (PDF)

Product Specification PS-50530-002 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family	Splices
Series	50532
Crimp Quality Equipment	Yes
Mil-Spec	N/A
Product Name	Parallel

Physical

Barrel Type	Closed
Insulation	None
Packaging Type	Bag
Wire Insulation Diameter	1.70mm (.067")
Wire Size AWG	10, 12
Wire Size mm²	2.63-6.64

Material Info

Reference - Drawing Numbers

Product Specification	PS-50530-002
Sales Drawing	SD-50532-002

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
50532Series

Application Tooling | **FAQ**


Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.


Japan


Description	Product #
Hand Crimper For JIS Terminal	0572575000
Air Type Hand Crimper For JIS Terminal	0573439005

This document was generated on 04/05/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

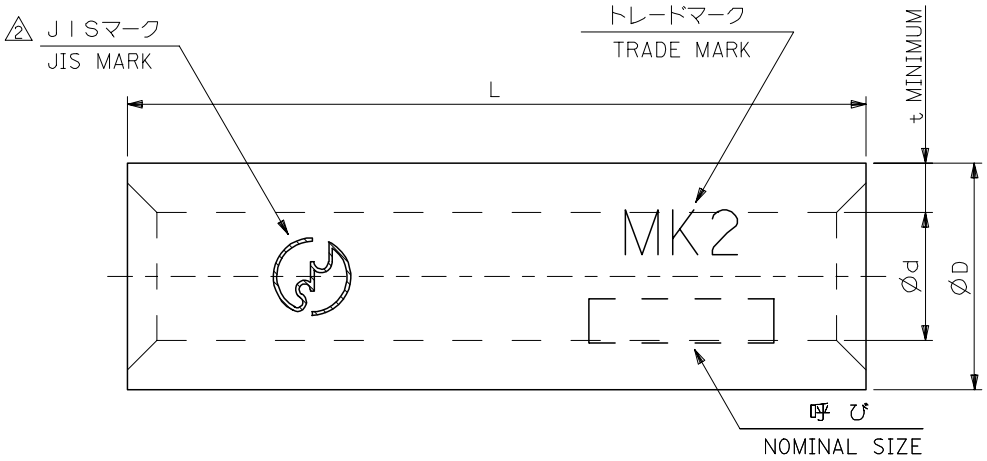



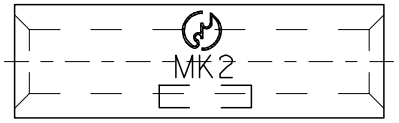

文字位置 LETTER POSITION
50532-7525～-7925
(P-14～P-70)

注記 NOTES

1 材質 MATERIAL
端子： 無酸素銅、スズメッキ
TERMINAL : OXYGEN FREE COPPER, TIN PLATING

ろう付け部：りん銅ろう、または 銀ろう
PART OF BRAZING : COPPER PHOSPHORUS BRAZING FILLER METALS OR SILVER SOLDER

△2 JIS認定品にのみ刻印.
DIE STAMPED MARK IS ALLOWED ONLY FOR JIS FILED PRODUCTS.

△2	t	ØD	Ød	L	呼び NOMINAL SIZE	MATERIAL NO.
JIS	1.9	17.5 +0.5 -0.4	13.3±0.4	19±0.7	P-70	50532-7925
	1.8	15.3 +0.4 -0.3	11.4±0.3		P-60	-7825
		13.2 +0.3 -0.2	9.4±0.2	16.5±0.7	P-38	-7725
	1.7	11.3 +0.3 -0.2	7.7±0.2	13.5±0.5	P-22	-7625
	1.45	8.9 +0.3 -0.2	5.8±0.2	11±0.5	P-14	-7525
	1.15	7.0 +0.3 -0.2	4.5±0.2	9.5±0.5	P-8	-7425
	0.9	5.4±0.2	3.4±0.2	8.5±0.5	P-5.5	-7325
	0.8	4.1±0.2	2.3±0.2	8±0.5	P-2	-7225
-	0.7	3.3±0.2	1.7±0.2		P-1.25	50532-7125

REVISED
EC NO: J2007-2277 2007/03/27
DRWN:KITO 2007/05/18
CHKD:KASAHARA
APPR:NUKITA 2007/05/21
DESCRIPTION
REV C

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: T.KAIHO DATE: 2002/10/09
CHECKED BY: T.ITO DATE: 2002/10/09
APPROVED BY: T.YAMAGUCHI DATE: 2002/10/09

TITLE: RING SLEEVE (P-TYPE)

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-50532-002
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION