

BLB102SYC-28V-P SUPER BRIGHT YELLOW


Features

- BUILT-IN CURRENT LIMITING RESISTOR FOR DIRECT APPLICATION OF DIFFERENT ACROSS CURRENT.
- LONG LIFE.
- LOW CURRENT, POWER SAVINGS.
- LOW MAINTENANCE.
- SOLID STATE, HIGH VIBRATION RESISTANT.
- 28V INTERNAL RESISTOR.

Description

The Super Bright Yellow source color devices are made with DH InGaAlP on GaAs substrate Light Emitting Diode.

Package Dimensions

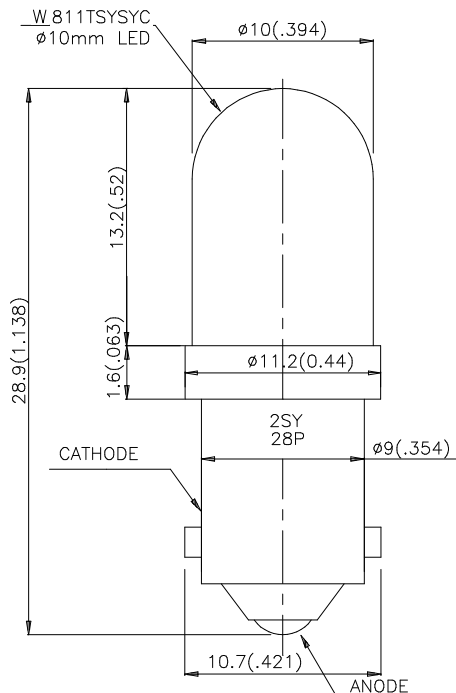

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Specifications are subject to change without notice.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) V=28V		Viewing Angle
			Min.	Typ.	201/2
BLB102SYC-28V-P	SUPER BRIGHT YELLOW (InGaAlP)	WATER CLEAR	380	600	40°

Note:


1. 01/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25°C

Symbol	Parameter	Device	Typ.	Max.	Units	Test Conditions
λ_{peak}	Peak Wavelength	Super Bright Yellow	590	-	nm	V _F =28V
λ_D	Dominate Wavelength	Super Bright Yellow	588	-	nm	V _F =28V
$\Delta\lambda_{1/2}$	Spectral Line Half-width	Super Bright Yellow	28	-	nm	V _F =28V
I _F	Forward Current	Super Bright Yellow	10.5	-	mA	V _F =28V
C	Capacitance	Super Bright Yellow	25	-	pF	V _F =0V;f=1MHz
I _R	Reverse Current	Super Bright Yellow	-	10	uA	V _R = 5V

Absolute Maximum Ratings at T_A=25°C

Parameter	Super Bright Yellow	Units
Power Dissipation	400	mW
Forward Voltage	30	V
Reverse Voltage	5	V
Operating Temperature	-40°C To +70°C	
Storage Temperature	-40°C To +85°C	

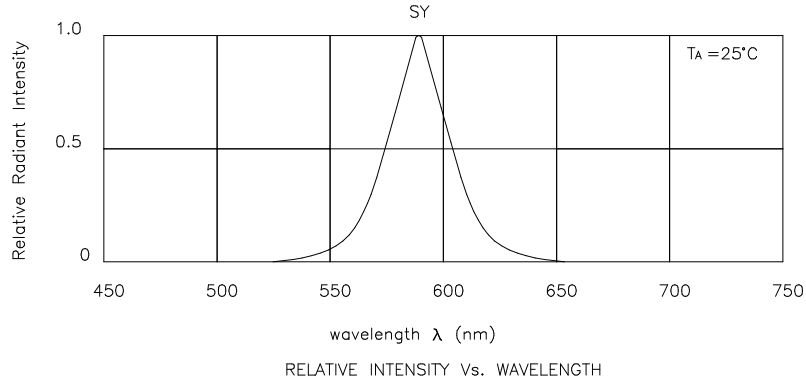

Super Bright Yellow

BLB102SYC-28V-P

