


P.C.B LAYOUT(copper-side view)

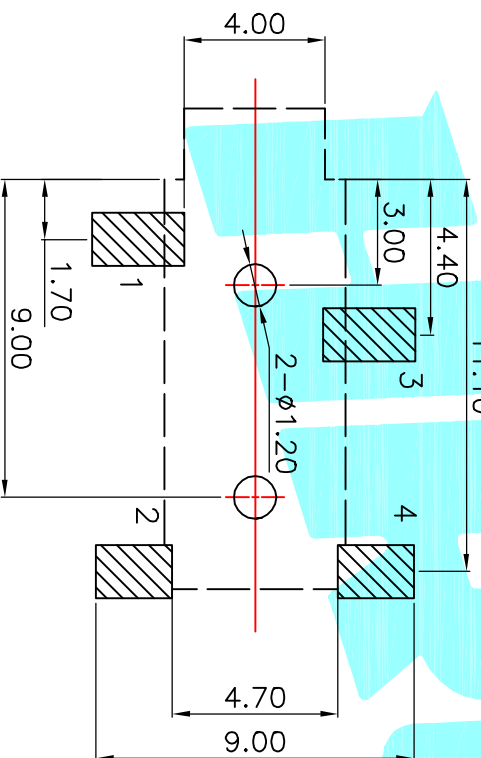

| | | | |
|-----------|-----------|-----------|-----------|
| Model No. | PJ-202A-A | PJ-202A-B | PJ-202A-C |
| Schematic | | | |

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

| | | | |
|----------------|---------|-----------------|--------------------|
| ② Terminal | 4 | Phosphor bronze | Au Plating |
| ① Housing | 1 | Nylon | Black |
| ITEM PART NAME | TERN.O. | QTY. | MATERIAL FINISHING |
| APPROVALS | | DATE | REMARK |

DRAWN J.X.Zhang 2013/11/11

TITLE: PHONE JACKES



ELECTRONICS CO.,LTD

CHECKED

PART NO. PJ-202A

| | | | |
|----------------|---|------------|--------------|
| APPROVALS | | SCALE: 1:1 | PROJ. |
| TOLERANCES ARE | 30 ^{±0.15} 10 ^{±0.20} 5 ^{±0.10} ~ 5 | ANGLE ±2° | SHEET 1 OF 1 |

| | | | | | | |
|---------|------|-------|--------------|---------|--------|--------|
| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
| | A | | NEW | | | |