


Features

- $S_{21} = 35.5 \text{ dB @ 2300 MHz}$
= 34.5 dB @ 2400 MHz
- NF of 0.90 dB over Frequency
- Unconditionally Stable
- Single 4.5V Supply
- High OIP3 @ Low Current

Description

The plerow™ ALN-series is the compactly designed surface-mount module for the use of the LNA with or without the following gain blocks in the infrastructure equipment of the mobile wireless (CDMA, GSM, PCS, PHS, WCDMA, DMB, WLAN, WiBro, WiMAX), GPS, satellite communication terminals, CATV and so on. It has an exceptional performance of low noise figure, high gain, high OIP3, and low bias current. The stability factor is always kept more than unity over the application band in order to ensure its unconditionally stable implementation to the application system environment. The surface-mount module package including the completed matching circuit and other components necessary just in case allows very simple and convenient implementation onto the system board in mass production level.



Specifications (in Production)

Typ. @ T = 25°C, V_s = 4.5 V, Freq. = 2350 MHz, Z_{o,sys} = 50 ohm

| Parameter | Unit | Specifications | | |
|-------------------------------|------|----------------------------------|-------|-----------|
| | | Min | Typ | Max |
| Frequency Range | MHz | 2300 | | 2400 |
| Gain | dB | 34 | 35 | |
| Gain Flatness | dB | | ± 0.5 | ± 0.7 |
| Noise Figure | dB | | 0.90 | 0.95 |
| Output IP3 ⁽¹⁾ | dBm | 35 | 37 | |
| S11 / S22 ⁽²⁾ | dB | | | -18 / -10 |
| Output P1dB | dBm | 20 | 21 | |
| Switching Time ⁽³⁾ | µsec | | - | |
| Supply Current | mA | | 130 | 150 |
| Supply Voltage | V | | 4.5 | |
| Impedance | Ω | | 50 | |
| Package Type & Size | mm | Surface Mount Type, 13Wx13Lx3.8H | | |

More Information

Website: www.asb.co.kr
E-mail: sales@asb.co.kr
Tel: (82) 42-528-7223
Fax: (82) 42-528-7222


Operating temperature is -40°C to +85°C.

1) OIP3 is measured with two tones at an output power of 4 dBm / tone separated by 1 MHz.

2) S11/S22 (max) is the worst value within the frequency band.

3) Switching time means the time that takes for output power to get stabilized to its final level after switching DC voltage from 0 V to V_s.

Outline Drawing (Unit: mm)

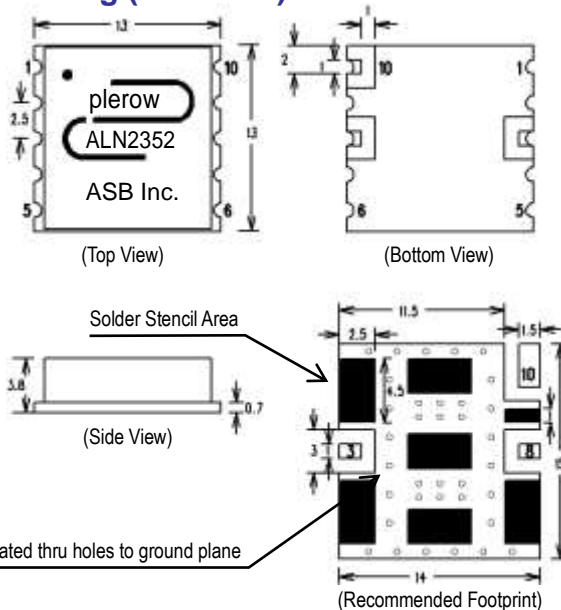

| Pin Number | Function |
|------------|----------|
| 3 | RF In |
| 8 | RF Out |
| 10 | +Vcc |
| Others | Ground |


Note: 1. The number and size of ground via holes in a circuit board is critical for thermal RF grounding considerations.
2. We recommend that the ground via holes be placed on the bottom of all ground pins for better RF and thermal performance, as shown in the drawing at the left side.

**Typical Performance
(Measured)**


2300~2400 MHz

+4.5 V


S-parameters

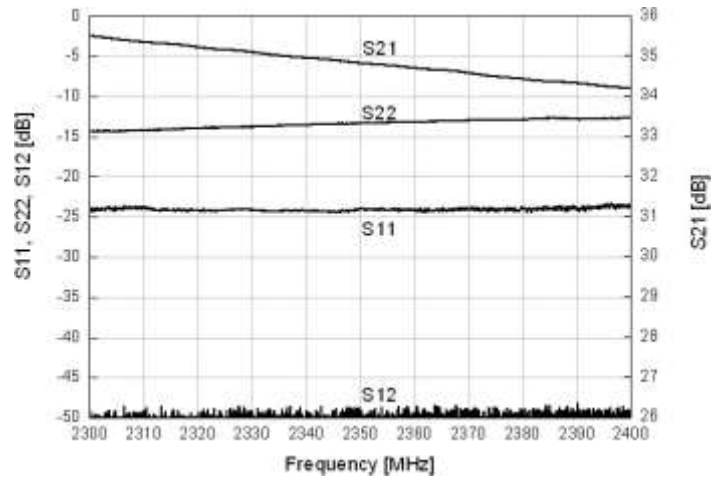


S-parameters & K Factor

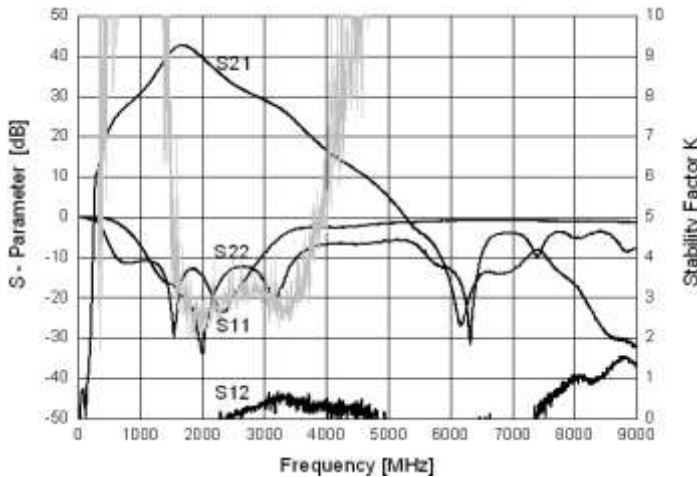


Noise Figure

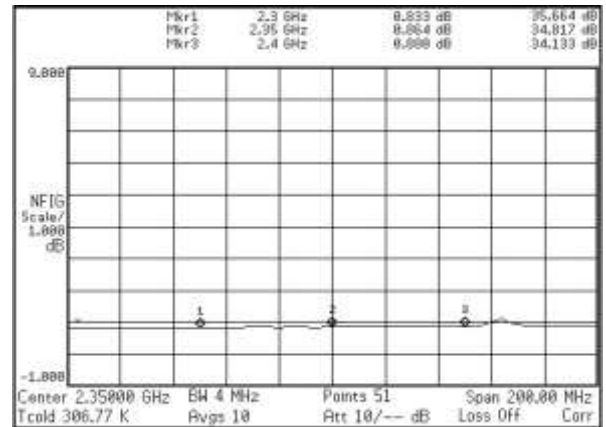


OIP3

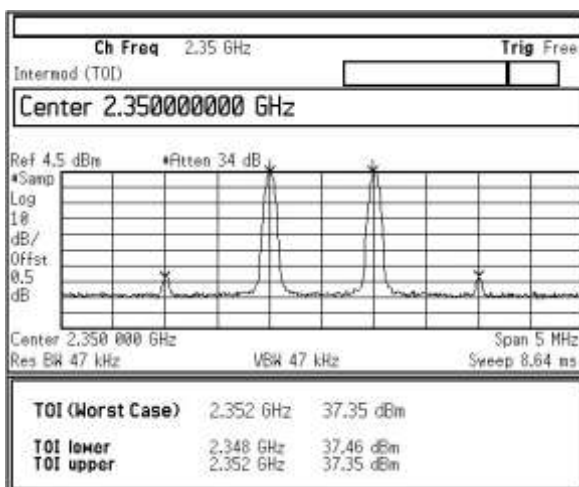


P1dB

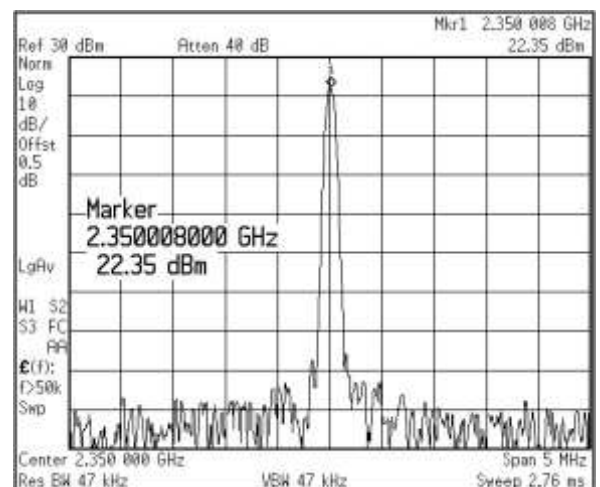

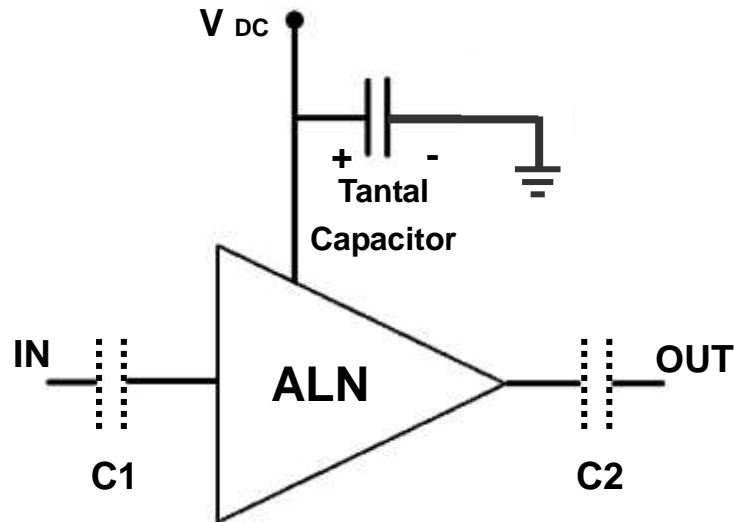


- 1) The tantal capacitor is optional and for bypassing the AC noise introduced from the DC supply. The capacitance value may be determined by customer's DC supply status.
- 2) So-called DC blocking capacitors are always necessarily placed at the input and output port for allowing only the RF signal to pass and blocking the DC component in the signal. The DC blocking capacitors are included inside the LNA module. Therefore, C1 & C2 capacitors may not be necessary, but can be added just in case that the customer wants. The value of C1 & C2 is determined by considering the application frequency.

Recommended Soldering Reflow Process

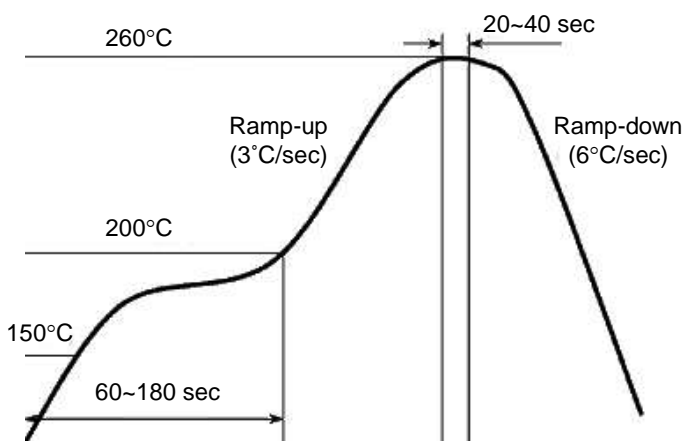

Evaluation Board Layout

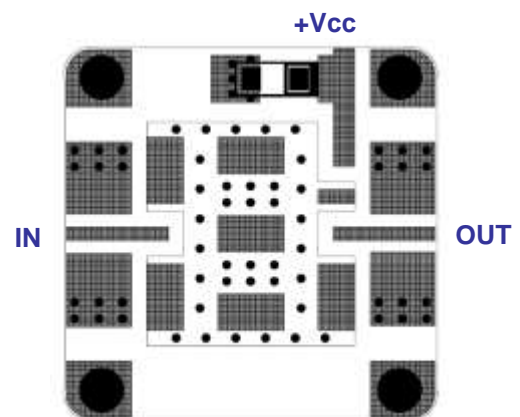

Size 25 x 25mm
(for ALN Series – 13x13mm)

Copyright ©2007-2017 ASB Inc. All rights reserved. Datasheet subject to change without notice. ASB assumes no responsibility for any errors which may appear in this datasheet. No part of the datasheet may be copied or reproduced in any form or by any means without the prior written consent of ASB.