


NOTES:

1. MATERIAL:  
 CLIP RING: BERYLLIUM COPPER PER ASTM B194  
 FRONT BODY: BERYLLIUM COPPER PER ASTM B196  
 CENTER CONTACT & REAR BODY: BRASS PER ASTM B16  
 INSULATOR: TEFLON PER ASTM D1710
2. FINISH:  
 OUTER & CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER  
 .000050 MIN. NICKEL PER QQ-N-290  
 REAR BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER  
 .000050 MIN. NICKEL PER QQ-N-290  
 CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER  
 COPPER FLASH
3. ELECTRICAL:  
 DIELECTRIC WITHSTANDING VOLTAGE: 800 VRMS  
 RECOMMENDED FREQUENCY RANGE: 0 - 3.0 GHz.
4. FOR USE WITH .141 DIA. SEMI-RIGID CABLE.


.188 JACKET  
IF JACKETED CABLE

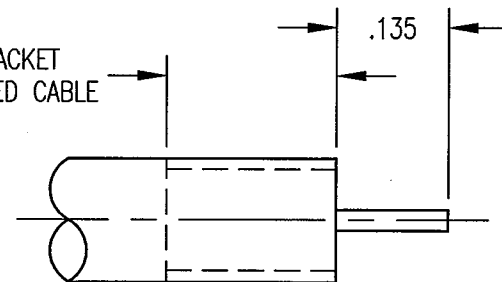

STRIPPING DIMENSIONS

EFFECTIVE FEBRUARY 19, 1999 THIS  
DRAWING BECAME THE PROPERTY  
OF WINCHESTER ELECTRONICS DIV.  
400 PARK RD., WATERTOWN, CT 06795  
LITTON SYSTEMS, INCORPORATED.

THIS INFORMATION IS PROPRIETARY AND CONFIDENTIAL. IT IS DISCLOSED TO YOU ON  
 THE CONDITION NO FURTHER DISCLOSURE IS MADE TO OTHER THAN RETCONN PERSONNEL  
 WITHOUT WRITTEN AUTHORIZATION FROM RETCONN INC., TORRINGTON, CT.

				UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.010 FRACTIONS ±1/64 ANGLE ±2° ALL DIMENSIONS PRIOR TO PLATING CHAMFER 1ST THREAD 45° TO ROOT DIAMETER REMOVE ALL BURRS AND SHARP EDGES ALL DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR SURFACE FINISH SHALL BE 63 MICROINCHES MAXIMUM DIMENSIONS IN INCHES DO NOT SCALE PRINT		 <b>RETCONN</b> A SUBSIDIARY OF SPM 199 W. PEARL ROAD TORRINGTON, CT. 06790 TEL. (860) 489-1220 FAX (860) 496-7307				
D	ECN 2052	7/10/98	JMC	237	TITLE					
C	NPR 694	1/22/98	JED	JMC	RDM STRAIGHT RECEPTACLE					
REV.	DESCRIPTION OF CHANGE	DATE	DRN	APPR	MATERIAL	DRAWN	DATE	CHECKED	SCALE	FSCM
	REVISIONS				FINISH	JED	1/22/98	PRP	6:1	ODWJ4
						APPR.	DWG. NO.			REV.
						JMC	311-510-1410G			D