

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0873401075](#)
Status: **Active**
Description: 2.00mm (.079") Pitch Milli-Grid™ Receptacle, Surface Mount (Very Low Profile), Top Entry, without Locating Pegs, with Pick-and-Place Cap, 0.38µm (15µ") Gold (Au) Plating, 10 Circuits, Lead-free, Tube

Documents:
[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family PCB Receptacles
Series [87340](#)
Application Board-to-Board
Product Literature Order No 987650-1991
Product Name Milli-Grid™

Physical

Circuits (Loaded) 10
Color - Resin Black
Durability (mating cycles max) 25
Flammability 94V-0
Glow-Wire Compliant No
Lock to Mating Part Yes
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Rows 2
Orientation Vertical
PCB Locator No
PCB Retention None
Packaging Type Tube
Pitch - Mating Interface (in) 0.079 In
Pitch - Mating Interface (mm) 2.00 mm
Plating min: Mating (µin) 15
Plating min: Mating (µm) 0.38
Plating min: Termination (µin) 76
Plating min: Termination (µm) 1.9
Polarized to Mating Part No
Polarized to PCB No
Robotic Placement Pick and Place Cap
Surface Mount Compatible (SMC) N/A
Temperature Range - Operating -55°C to +105°C
Termination Interface: Style Surface Mount

Electrical

Current - Maximum per Contact 1A
Voltage - Maximum 125V

Solder Process Data

Duration at Max. Process Temperature (seconds) 14
Lead-free Process Capability Reflow Capable (SMT only)

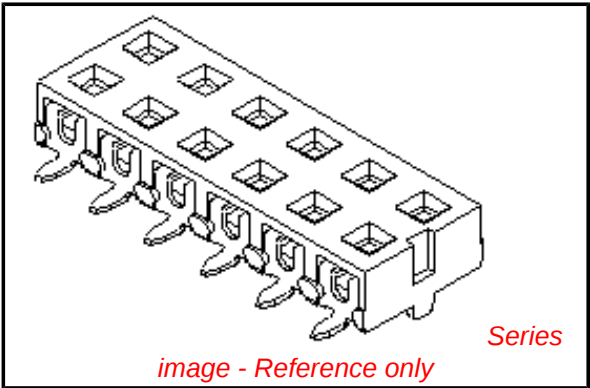


image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[87340Series](#)

Mates With
[87759](#) Vertical, Surface Mount, Stackable
PCB Headers, [87760](#) Right Angle, Through
Hole, Stackable PCB Headers, [87758](#)
Vertical, Through Hole, Stackable PCB
Headers

Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	265


Material Info

Reference - Drawing Numbers



Sales Drawing	SD-87340-**74
---------------	---------------

This document was generated on 05/03/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

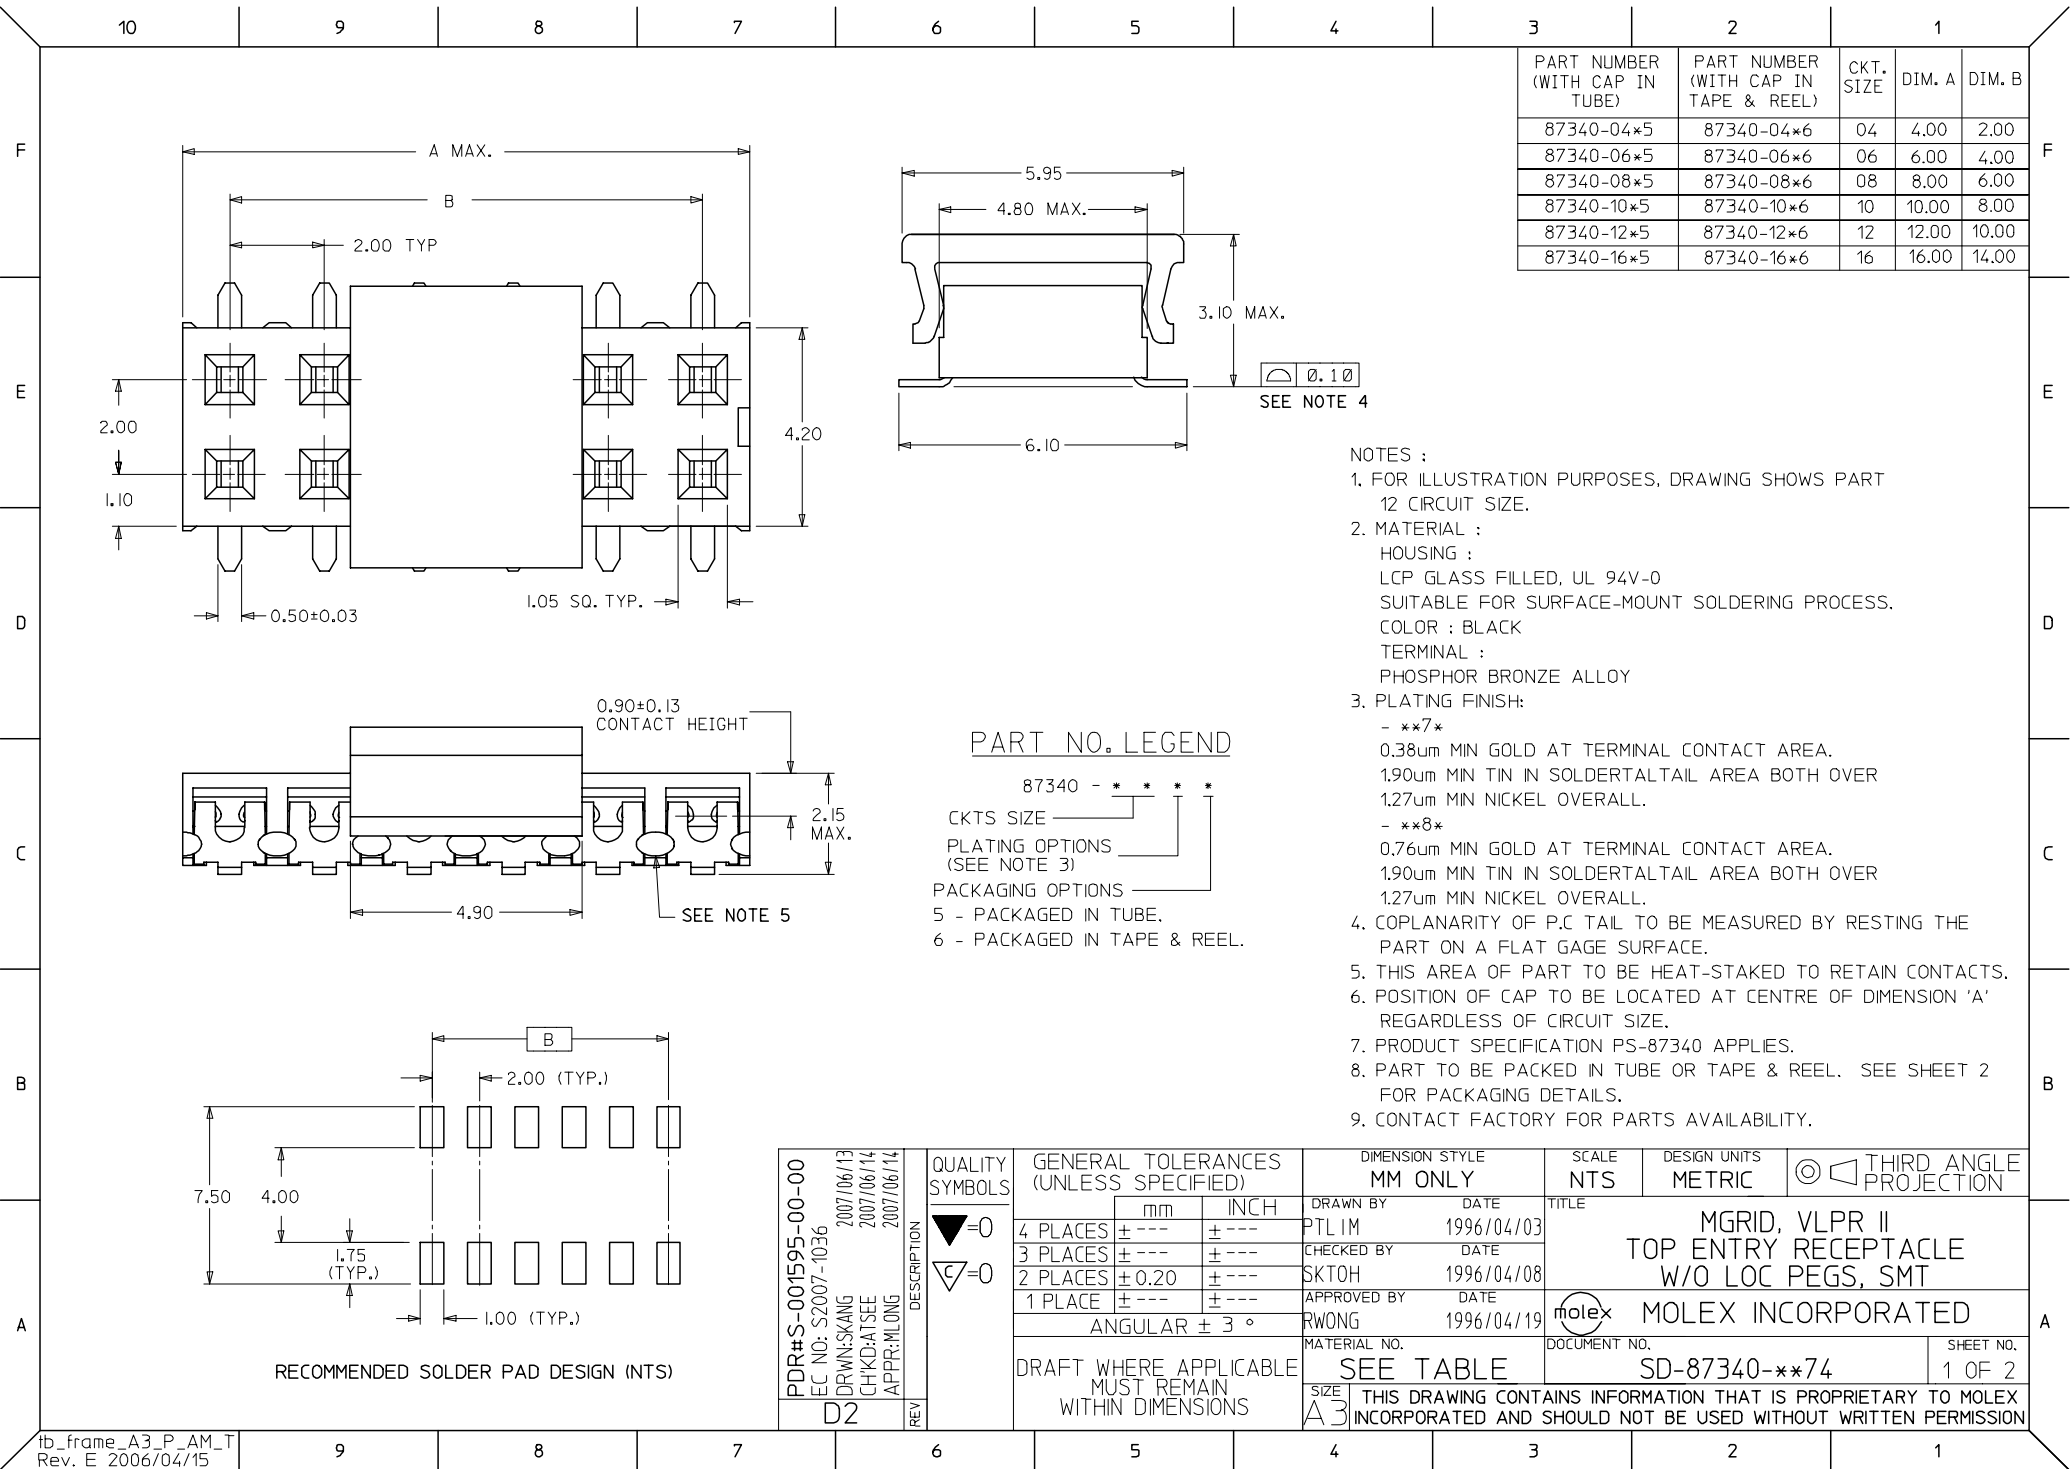

EMBOSSED CARRIER TAPE WITH DIMENSIONS
(12 CKT IS SHOWN FOR ILLUSTRATION ONLY)

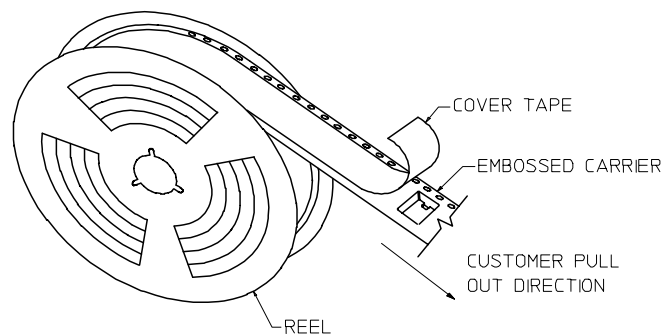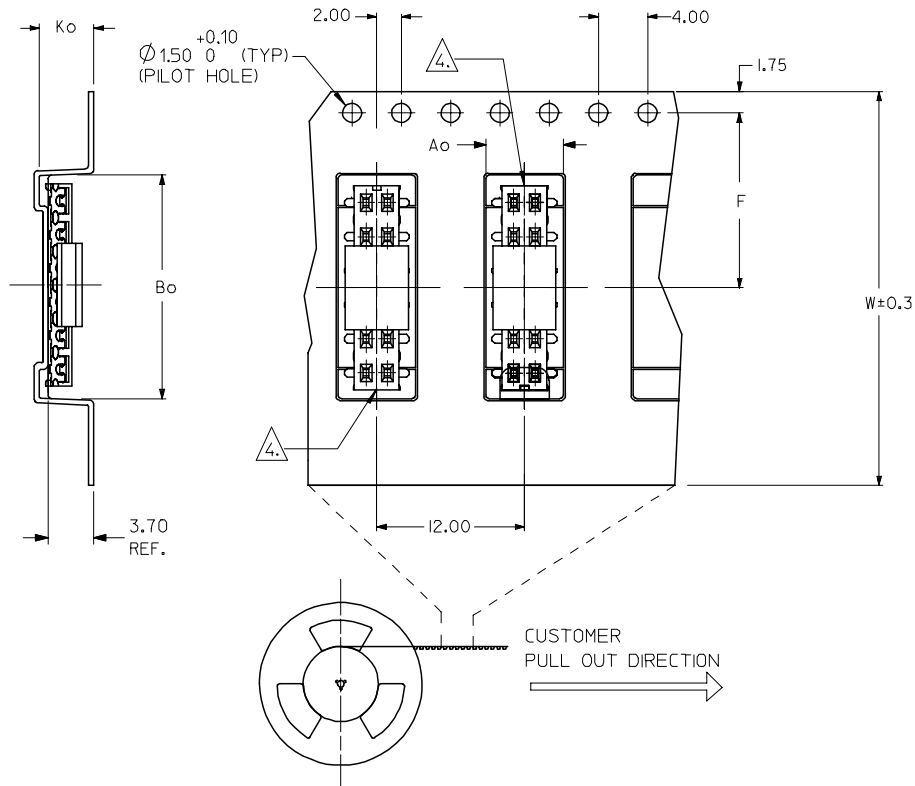


TAPE AND REEL ASSEMBLY SHOWN IS FOR ILLUSTRATION ONLY


PART NO (WITH CAP IN TAPE & REEL)	CKT SIZE	Ao	Bo	F	W	Ko
87340-0476	04	6.70	5.30	11.50	24.00	5.30
87340-0676	06	6.70	6.40	11.50	24.00	5.30
87340-0686	06	6.70	6.40	11.50	24.00	5.30
87340-0876	08	6.70	8.50	11.50	24.00	5.30
87340-1076	10	6.70	10.40	11.50	24.00	5.30
87340-1276	12	6.70	12.40	11.50	24.00	5.30
87340-1686	16	6.70	16.30	11.50	24.00	5.30

NOTES:

1. LEADER AND TRAILER TAPE

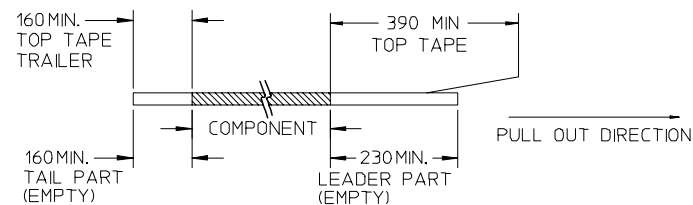

2. PEELING OFF FORCE OF THE TOP TAPE: 20-80gf.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)



3. PACKAGING STANDARD IS AS PER EIA-481.

4. TAPE & REEL QUANTITY = 1000 PCS/REEL

5. NO FIX ORIENTATION OF ASSEMBLY PART IN T&R.

PDR#S-001595-00-00	2007/06/13	2007/06/14	2007/06/14
EC NO: S2007-1036	DRWN:SKANG	CHKD:ATSEE	APPR:MLONG
D2	REV	DESCRIPTION	QUALITY SYMBOLS

QUALITY SYMBOLS
$\nabla=0$
$\nabla=0$

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	$\pm$ ---	$\pm$ ---
3 PLACES	$\pm$ ---	$\pm$ ---
2 PLACES	± 0.20	$\pm$ ---
1 PLACE	$\pm$ ---	$\pm$ ---
ANGULAR	$\pm 3^\circ$	

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
PTL IM	1996/04/03
CHECKED BY	DATE
SKTOH	1996/04/08
APPROVED BY	DATE
RWONG	1996/04/19

MATERIAL NO. SEE TABLE

SIZE A3

SCALE
NTS

TITLE

DOCUMENT NO.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DESIGN UNITS
METRIC

MGRID, VLPR II
TOP ENTRY RECEPTACLE
W/O LOC PEGS, SMT

MOLEX INCORPORATED

SD-87340-***74

THIRD ANGLE
PROJECTION

SHEET NO. 2 OF 2