

- Frequency range 50.01MHz to 200MHz
- LVCMOS Output
- Supply Voltage 3.3 VDC
- High Q fundamental mode crystal
- Low jitter multiplier circuit
- Low unit cost

## DESCRIPTION

GV42 VCXOs, are packaged in an industry-standard, 4 pad, 11.4mm x 9.6mm x 2.5mm SMD package. The VCXO incorporates a high Q fundamental mode crystal and a low jitter multiplier circuit.


## SPECIFICATION

|  |   |
|--|---|
| Frequency Range:                       | 50.01MHz to 200.0MHz  |
| Supply Voltage:                        | 3.3 VDC $\pm 5\%$   |
| Output Logic:                          | LVCMOS  |
| Integrated Phase Jitter:               | 2.3ps typical, 4.0ps maximum (for 155.250MHz)   |
| Period Jitter RMS:                     | 4.0ps typical (for 155.250MHz)  |
| Period Jitter Peak to peak:            | 27.0ps typical (for 155.250MHz)   |
| Phase Noise:                           | See table below   |
| Initial Frequency Accuracy:            | Tune to the nominal frequency with $V_c = 1.65 \pm 0.2VDC$                                  |
| Output Voltage HIGH (1):               | 90% Vdd minimum   |
| Output Voltage LOW (0):                | 10% Vdd maximum   |
| Pulling Range:                         | From $\pm 30ppm$ to $\pm 150ppm$  |
| Temperature Stability:                 | See table   |
| Output Load:                           | 15pF  |
| Start-up Time:                         | 10ms maximum, 5ms typical   |
| Duty Cycle:                            | 50% $\pm 5\%$ measured at 50% Vdd   |
| Rise/Fall Times:                       | 1.2ns typical (15pF load)   |
| Current Consumption:                   | 25mA maximum (15pF load)  |
| Linearity:                             | 10% maximum, 6% typical   |
| Modulation Bandwidth:                  | 25kHz minimum   |
| Input Impedance:                       | 2 M $\Omega$ minimum  |
| Slope Polarity:<br>(Transfer function) | Monotonic and Positive. (An increase of control voltage always increases output frequency.) |
| Storage Temperature:                   | -50° to +100°C  |
| Ageing:                                | $\pm 5ppm$ per year maximum   |
| Enable/Disable (Tristate):             | Not available (4 pad package)   |
| RoHS Status:                           | Fully compliant   |


## FREQUENCY STABILITY

| Stability Code | Stability $\pm ppm$ | Temp. Range |
|----------------|---------------------|-------------|
| A              | 25                  | 0°~+70°C    |
| B              | 50                  | 0°~+70°C    |
| C              | 100                 | 0°~+70°C    |
| D              | 25                  | -40°~+85°C  |
| E              | 50                  | -40°~+85°C  |
| F              | 100                 | -40°~+85°C  |

If non-standard frequency stability is required  
Use 'I' followed by stability, i.e. I20 for  $\pm 20ppm$



## OUTLINE & DIMENSIONS

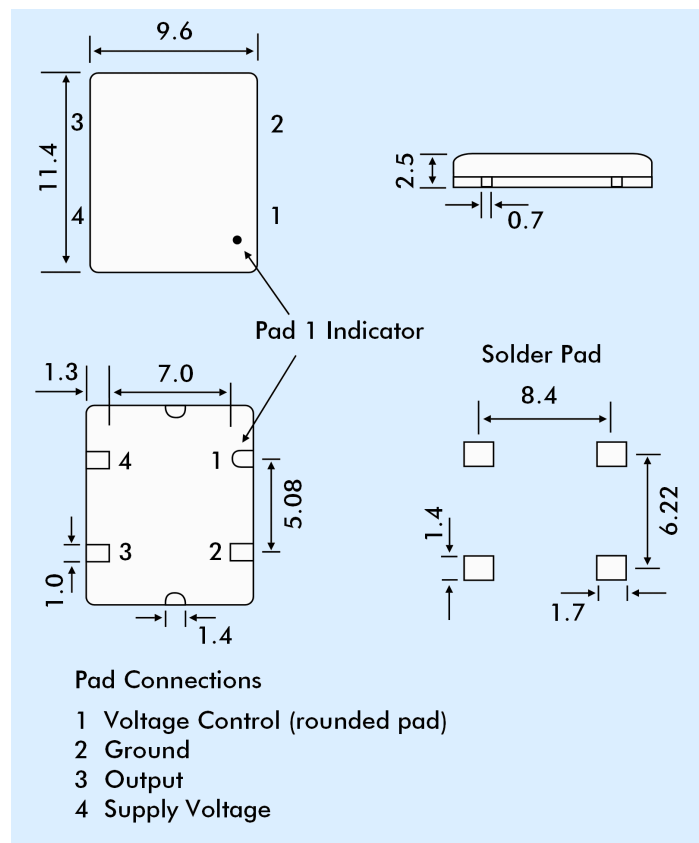

## PHASE NOISE

| Offset | Frequency 155.25MHz |
|--------|---------------------|
| 10Hz   | -65dBc/Hz           |
| 100Hz  | -95dBc/Hz           |
| 1kHz   | -120dBc/Hz          |
| 10kHz  | -128dBc/Hz          |
| 100kHz | -122dBc/Hz          |
| 1MHz   | -120dBc/Hz          |
| 10MHz  | -140dBc/Hz          |

## PART NUMBERING

