CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT GLASS PASSIVATED

FAST RECOVERY SILICON RECTIFIER

VOLTAGE RANGE 50 - 1000 Volts CURRENT 3.0 Amperes

FBM31PT

THRU

FBM37PT


Lead free devices

FEATURES

* Low leakage current
* Ideal for surface mounted applications
* Metallurgically bonded construction
* Fast recovery times for high efficiency
* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
* Glass passivated junction
* High temperature soldering guaranteed : 260°C/10 seconds at terminals



SMB

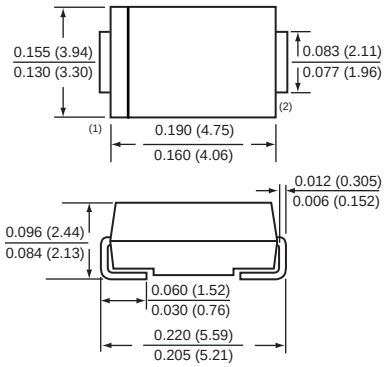

Dimensions in inches and (millimeters)

SMB

MECHANICAL DATA

Case: JEDEC SMB molded plastic
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
Polarity: Indicated by cathode band
Weight: 0.003 ounces, 0.093 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MAXIMUM RATINGES (At T_A = 25°C unless otherwise noted)

RATINGS	SYMBOL	FBM31PT	FBM32PT	FBM33PT	FBM34PT	FBM35PT	FBM36PT	FBM37PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current T_L = 90°C	I_O	3.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	90							Amps
Typical Junction Capacitance (Note 1)	C_J	65							pF
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +150							°C

ELECTRICAL CHARACTERISTICS (At T_A = 25°C unless otherwise noted)


CHARACTERISTICS	SYMBOL	FBM31PT	FBM32PT	FBM33PT	FBM34PT	FBM35PT	FBM36PT	FBM37PT	UNITS
Maximum Instantaneous Forward Voltage at 3.0 A DC	V_F	1.3							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage at T_A = 25°C	I_R	10							uAmps
Maximum Full Load Reverse Current Average, Full Cycle at T_A = 55°C		150							uAmps
Maximum Reverse Recovery Time (Note 2)	trr	150				250	500		nSec

2002-5

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
2. Test Conditions : I_F = 0.5 A, I_R = -1.0 A, I_{RR} = -0.25 A

RATING CHARACTERISTIC CURVES (FBM31PT THRU FBM37PT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

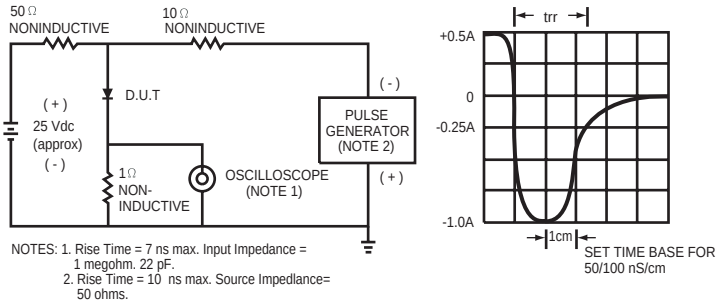

NOTES: 1. Rise Time = 7 ns max. Input Impedance = 1 megohm. 22 pF.
2. Rise Time = 10 ns max. Source Impedlance= 50 ohms.

FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

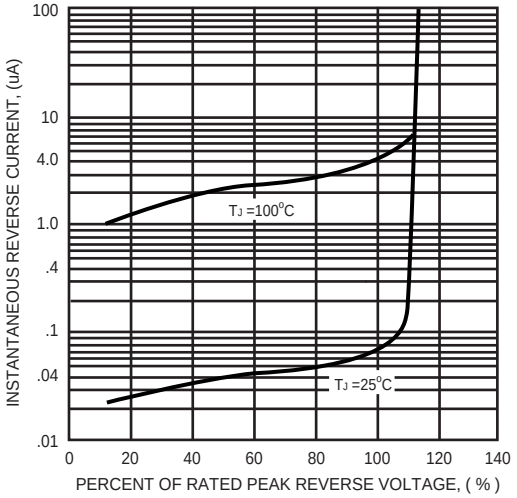


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

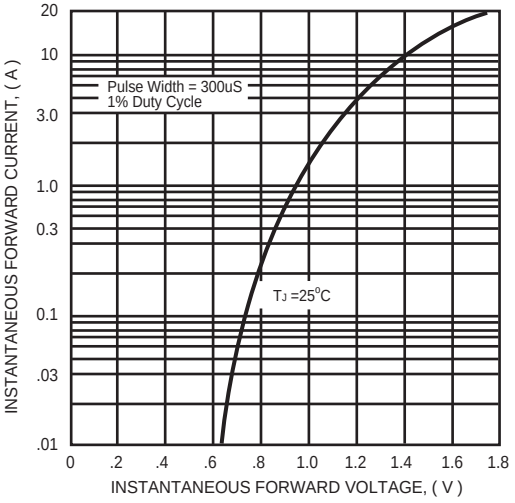


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

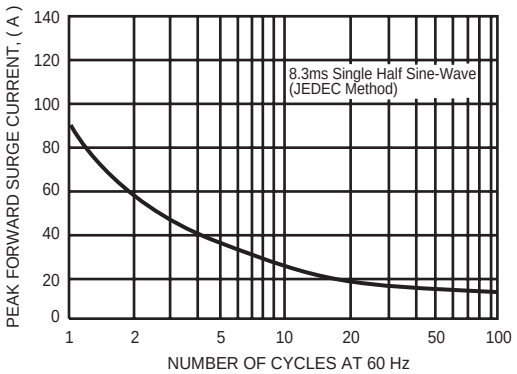


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

