


MLJ1608WR47KT000



Applications	Commercial Grade
Feature	<div style="border: 1px solid black; padding: 2px; display: inline-block; margin-right: 5px;">Shield</div> Magnetic Shield <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-right: 5px;">Multilayer</div> Multilayer <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-right: 5px;">Ferrite Core</div> Ferrite Core
Series Type	ML□
Status	Production
Brand	TDK



Size	
Length(L)	1.60mm ±0.15mm
Width(W)	0.80mm ±0.15mm
Thickness(T)	0.80mm ±0.15mm
Recommended Land Pattern (A)	0.60mm Nom.
Recommended Land Pattern (B)	0.80mm Nom.
Recommended Land Pattern (C)	0.80mm Nom.

Electrical Characteristics	
Inductance	470nH ±10% at 25MHz
Rated Current (L Change) [Typ.]	600mA (10% Down)
Rated Current (L Change) [Max.]	400mA (10% Down)
Rated Current (Temperature Rise) [Typ.]	
Rated Current (Temperature Rise) [Max.]	400mA (25°C Rise)
DC Resistance [Typ.]	380mΩ
DC Resistance [Max.]	494mΩ
Self Resonant Frequency [Min.]	190MHz
Self Resonant Frequency [Typ.]	260MHz
Q [Min.]	25
Q [Typ.]	

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C
Soldering Method	Reflow
	Iron Soldering
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000pcs
Weight	0.004g


! Images are for reference only and show exemplary products.
 ! This PDF document was created based on the data listed on the TDK Corporation website.
 ! All specifications are subject to change without notice.



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)



Associated Images

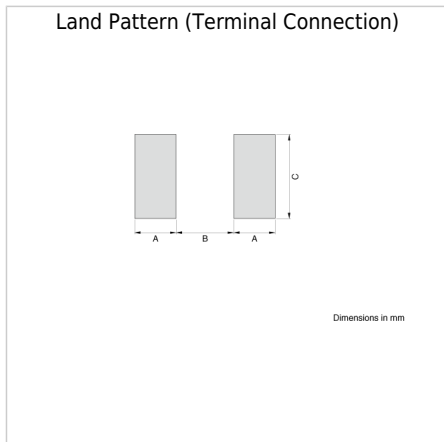

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.