

UTC TDA2822H LINEAR INTEGRATED CIRCUIT


DUAL LOW VOLTAGE POWER AMPLIFIER

DESCRIPTION


The UTC TDA2822H is a monolithic integrated audio amplifier in a 8-Pin plastic dual in line package. It is designed for portable cassette players and radios.

FEATURES


- *Wide operating supply voltage: $V_{CC}=1.8V\sim 6V$.
- *Low crossover distortion.
- *Low quiescent circuit current.
- *Bridge/stereo configuration.

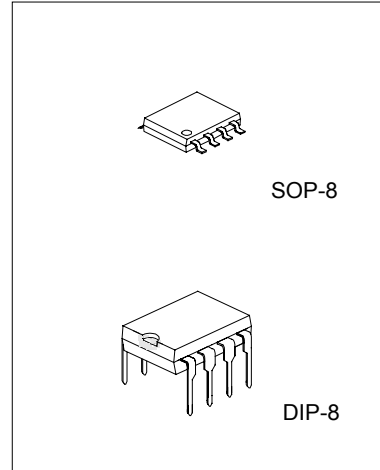

PIN CONFIGURATIONS

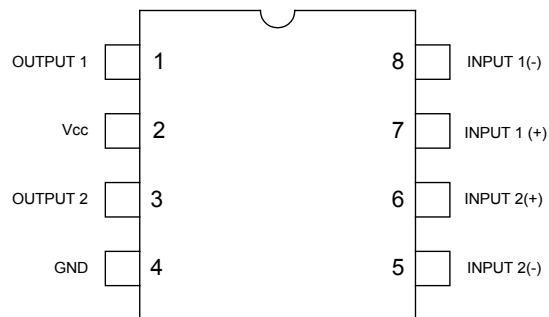

BLOCK DIAGRAM

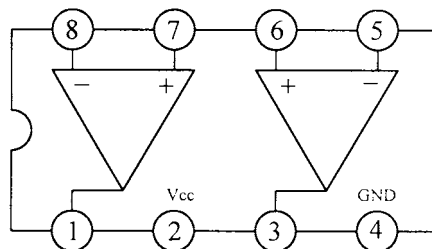

UTC TDA2822H LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)


PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	V _{CC}	15	V
Output Peak Current	I _o (peak)	1	A
Power Dissipation	P _D	1.0 (T _{AMB} =50°C) 1.4 (T _{CASE} =50°C)	W
	SOP-8	0.5 (T _{AMB} =50°C)	
Operating Temperature	T _J	+150	°C
Storage Temperature	T _{stg}	-40 ~ +150	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C, V_{CC}=4.5V, BTL parameter, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Operating Supply Voltage	V _{CC}		1.8		6	V
Quiescent Circuit Current	I _{CCQ}	R _L =∞		6	9	mA
Output Offset Voltage	V _{OS}	R _L =8Ω			±50	mV
Input Base Current	I _B			100		nA
Output Power	P _O	f=1kHz, THD=10% R _L =32Ω V _{CC} =6V V _{CC} =4.5V V _{CC} =3V V _{CC} =2V R _L =16Ω V _{CC} =6V V _{CC} =3V R _L =8Ω V _{CC} =4.5V V _{CC} =3V R _L =4Ω V _{CC} =3V	300 200 50 8 600 120 700 220 200	320 200 65 8 600 120 700 220 350		mW
Total Harmonic Distortion	THD	P _O =0.5W, R _L =8Ω, P _O =1kHz		0.2		%
Closed Loop Voltage Gain	A _{VF}	f=1kHz		39		dB
Input Resistance	Z _{in}	f=1kHz	100			kΩ
Total Input Noise	e _N	R _S =10kΩ B=22Hz~22KHz		3		μV
Supply Voltage Rejection	SVR	f=100Hz		40		dB
Power Bandwidth	BW _p	R _L =8Ω, P _O =1W		120		kHz


APPLICATION CIRCUIT

Fig. 1: STEREO

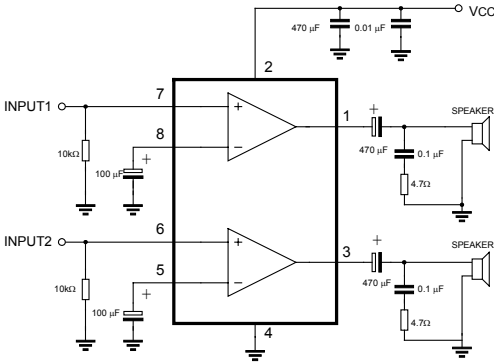

UTC TDA2822H LINEAR INTEGRATED CIRCUIT

Fig. 2: BRIDGE

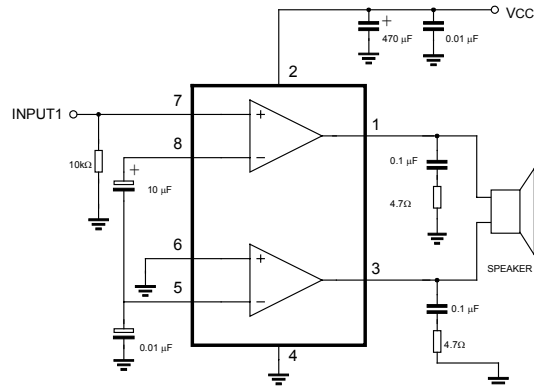

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.