

MATERIAL:

CONNECTOR - SMT

PLASTIC HOUSING:

LCP, FLAMMABILITY RATING UL94-V0


CONTACT:

PHOSPHOR BRONZE

PLATING: SEE AMPHENOL PART NUMBER

PACKAGING: TAPE AND REEL (500 PER)

TEMPERATURE RANGE: -40°C TO +85°C

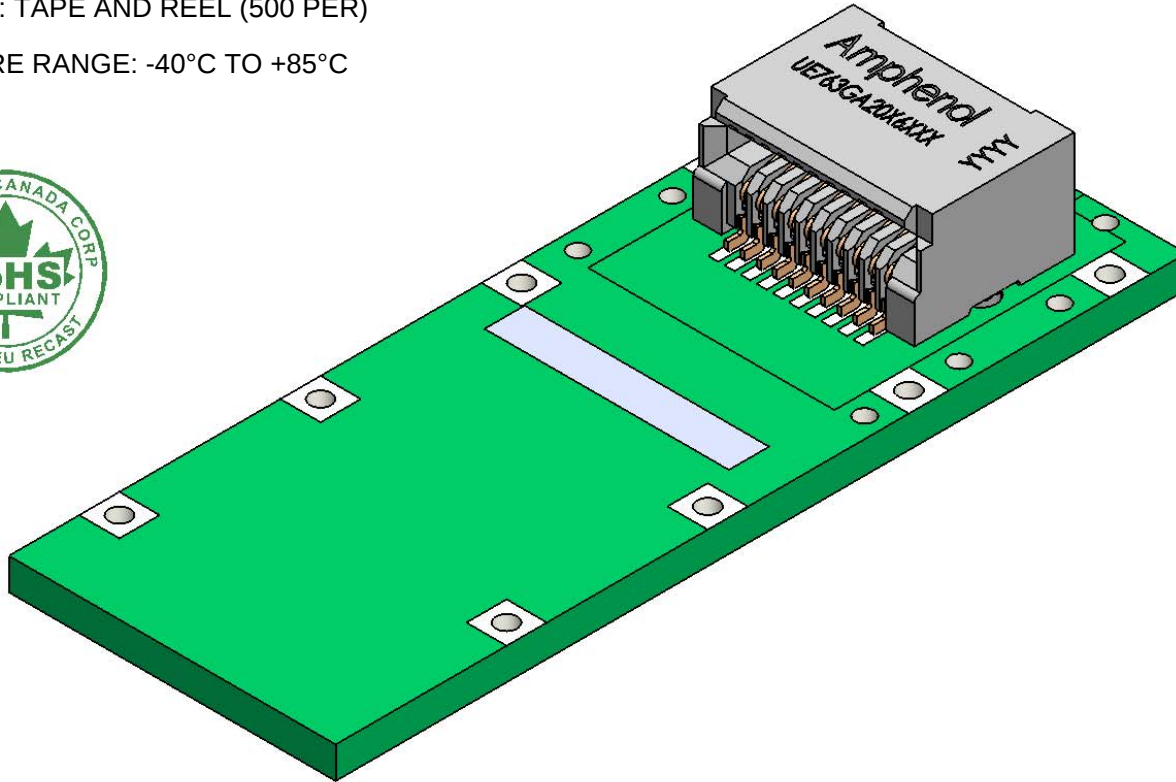

REVISIONS

REV.	ECN	DESCRIPTION	DATE	APPROVED
A		PRELIMINARY	X	
B		PRELIMINARY STAMP REMOVED	OCT24/14	
C		UPDATED	NOV11/14	

AMPHENOL PART NUMBER CONFIGURATION

UE76 - 3GA 20 - X 6 0 0 T

PACKAGING

T = TAPE AND REEL PACKAGING

PLATING

2 = 0.76um GOLD AT MATING AREA
GOLD FLASH IN TERMINATION

3 = 0.76um GOLD AT MATING AREA
3.0-7.62um MATTE TIN IN
TERMINATION

5 = 0.38um GOLD AT MATING AREA
GOLD FLASH IN TERMINATION

6 = 0.38um GOLD AT MATING AREA
3.0-7.62um MATTE TIN IN
TERMINATION

DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		APPROVALS		DATE	Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com	
		DRAWN	J.SI	JUL19/13		
DECIMALS	ANGLES	DESIGNED			TITLE 1X1 ULTRAPORT SFP CONNECTOR (25/32G)	
X.X ± 0.25	± 1°	CHECKED				
X.XX ± 0.15		QA APP'D				
MATERIAL AND FINISH		SEE NOTES				
REF.	X	IE APP'D			SIZE A4	DWG. NO. P-UE76-3GA20-X600T
CODE IDENT. NO.	03554	DWG APP'D			SCALE 4:1	PROJECT
					SHEET	1 OF 3

NOTE:

SOME OF ULTRAPORT CAGES PCB LAYOUT NOT ALLOWED HAVING SIGNAL TRACES ON THE TOP OF THE SURFACE. PLEASE CONTACT AMPHENOL HIGH SPEED INTERCONNECTS FOR CAGES AVAILABILITY FOR THE APPLICATIONS.

REVISIONS

REV.	ECN	DESCRIPTION	DATE	APPROVED
A		PRELIMINARY	X	
B		PRELIMINARY STAMP REMOVED	OCT24/14	
C		UPDATED	NOV11/14	

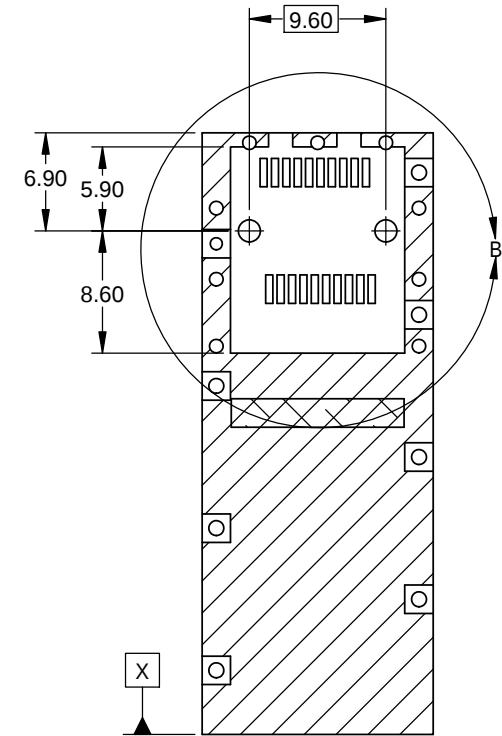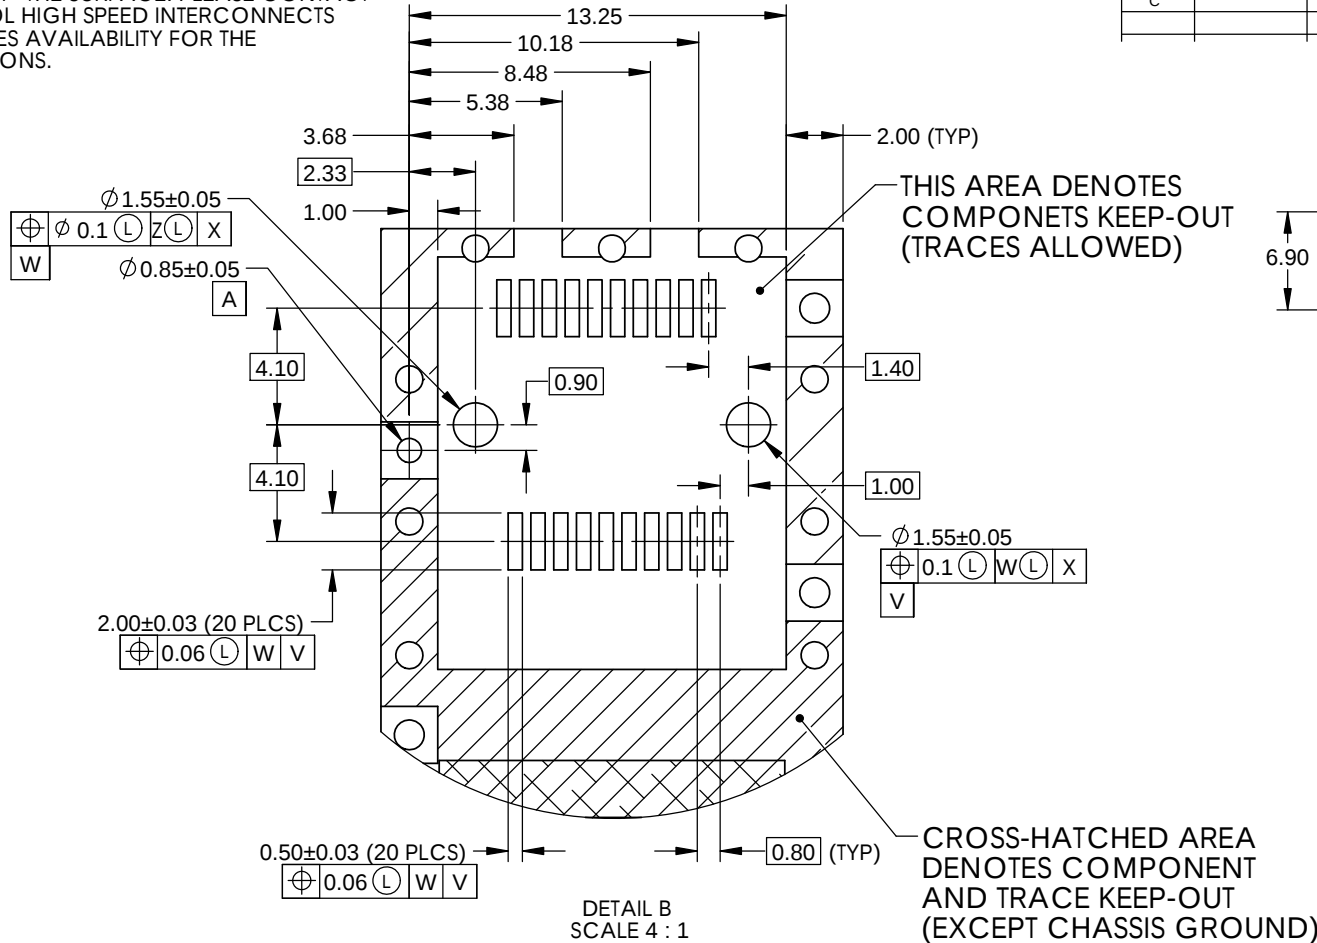

DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLES X.X ± 0.25 ± 1° X.XX ± 0.15		APPROVALS		DATE	Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com	
		DRAWN	J.SI	JUL19/13		
		DESIGNED				
		CHECKED				
MATERIAL AND FINISH		SEE NOTES		QA APPD	TITLE 1X1 ULTRAPORT SFP CONNECTOR (25/32G)	
REF.		X		IE APP'D		
CODE IDENT. NO.		03554		DWG APP'D		
SIZE	A4	DWG. NO.	P-UE76-3GA20-X600T	REV.	C	
SCALE	2:1	PROJECT		SHEET	3 OF 3	