

Europe: +49 / 7731 8399 0 | Email: info@standexmeder.com
USA: +1 / 508 295 0771 | Email: salesusa@standexmeder.com
Asia: +852 / 2955 1682 | Email: salesasia@standexmeder.com

Item No.:
9521712104
Item:
LS02-1B66-PA-1000W
LS02-1B71-PA-1000W

Dimensions mm[inch]
tolerances acc. to DIN ISO 2768-m
Toleranzen gem. DIN ISO 2768-m

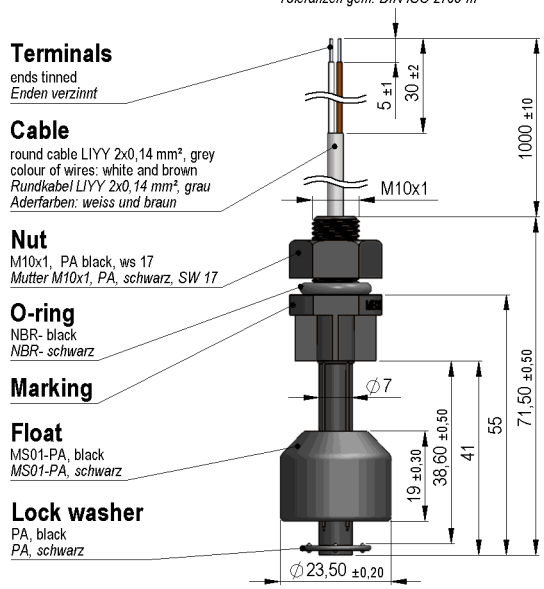


Schematic



CLOSED
GESCHLOSSEN

OPEN
OFFEN

Isometric
Scale 1:2
Maßstab 1:2

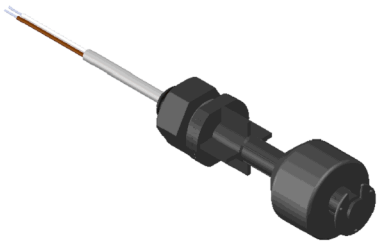

Marking
according to EN60062/factory code
gem. EN60062/Fertigungsstätte



Special Product Data	Conditions	Min	Typ	Max	Unit
Contact - form		A - NO			
Contact rating				10	W
Switching voltage				200	VDC
Switching current				0,5	A
Carry current				1	A
Sensor-resistance				450	mOhm
Housing material LS		PA			
Case colour		black			
Material of float		PA			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Operating temperature	cable not moved	-30		80	°C
Operating temperature	cable moved	-5		80	°C
Storage temperature		-30		80	°C

Cable specification	Conditions	Min	Typ	Max	Unit
Cable type		round cable			
Cable material		PVC			
Cross section		0.14 mm²			

General data	Conditions	Min	Typ	Max	Unit
Mounting advice		over 5m cable, a series resistor is recommended.			
Tightening torque				0,5	Nm

Modifications in the sense of technical progress are reserved

Designed at: 29.01.08 Designed by: BUELTZHOEFFER Approval at: 28.02.08 Approval by: BUELTZHOEFFER
Last Change at: 10.02.17 Last Change by: WKOVACS Approval at: 14.02.17 Approval by: DKUECHLER **Version:** 07