
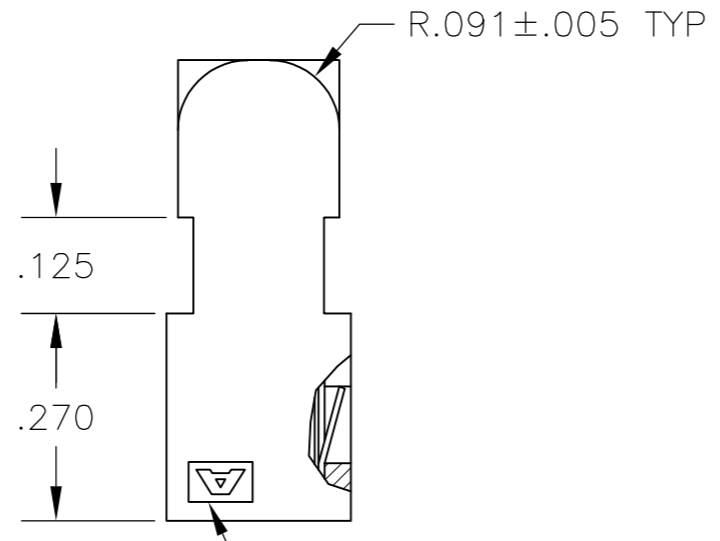


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		S2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

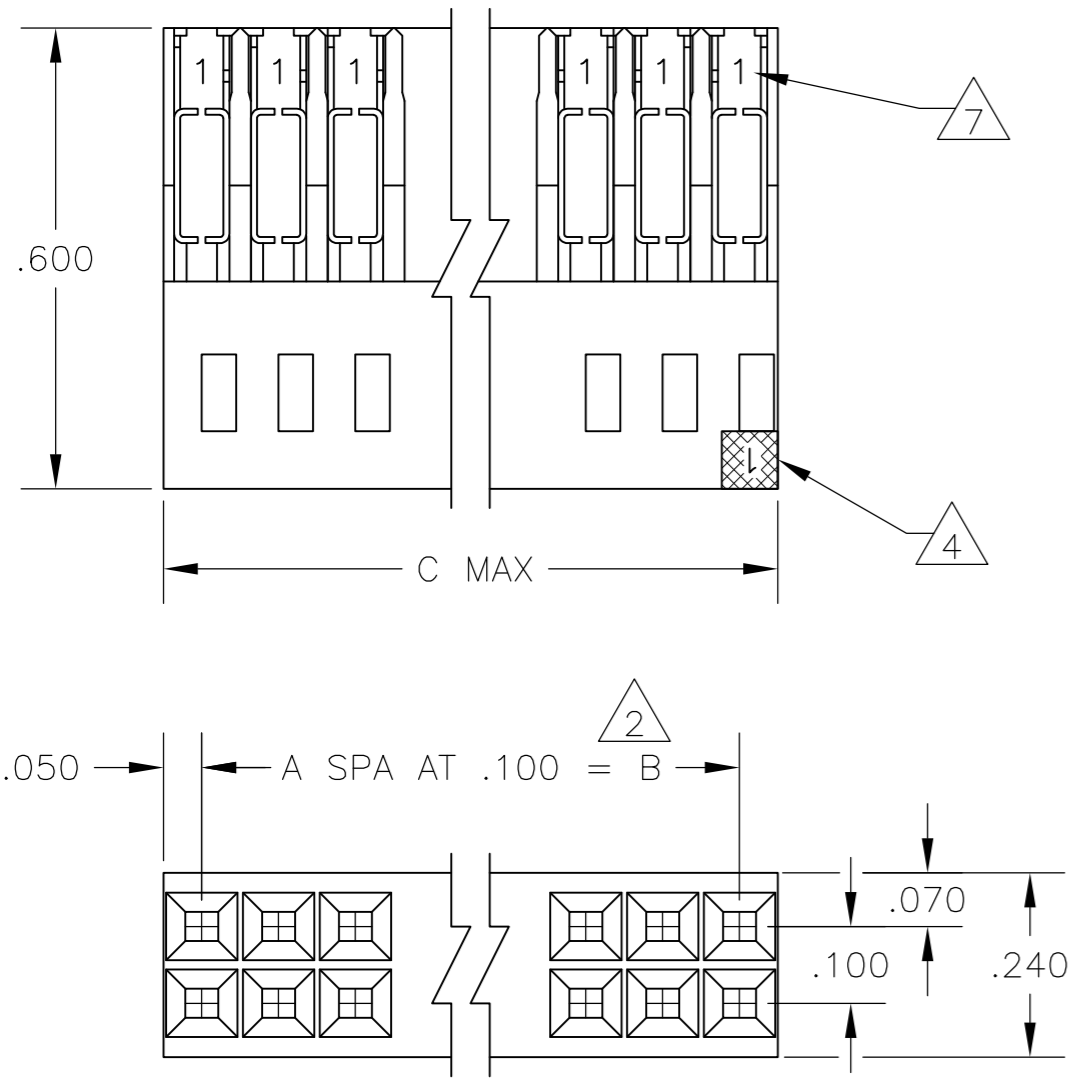

	C	B	A	NO OF POS	ASSEMBLY PART NUMBER
	3.200	3.100	31	64	3 9 8-102393-0
9 OBSOLETE	3.000	2.900	29	60	3 7-102393-8
9 OBSOLETE	2.700	2.600	26	54	3 7-102393-5
	2.500	2.400	24	50	3 7-102393-3
	2.000	1.900	19	40	3 6-102393-8
9 OBSOLETE	1.700	1.600	16	34	3 6-102393-5
9 OBSOLETE	1.600	1.500	15	32	3 6-4
9 OBSOLETE	1.500	1.400	14	30	3 6-3
9 OBSOLETE	1.400	1.300	13	28	3 6-2
	1.300	1.200	12	26	3 6-1
	1.200	1.100	11	24	3 6-0
9 OBSOLETE	1.100	1.000	10	22	3 5-9
	1.000	.900	9	20	3 5-8
	.900	.800	8	18	3 5-7
	.800	.700	7	16	3 5-6
	.700	.600	6	14	3 5-5
	.600	.500	5	12	3 5-4
	.500	.400	4	10	3 5-3
	.400	.300	3	8	3 5-2
	.300	.200	2	6	3 5-102393-1
C	B	A	NO OF POS	ASSEMBLY PART NUMBER	

	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
SUPERSEDED	3.600	3.500	35	72	3-102393-4
	3.500	3.400	34	70	3-3
	3.400	3.300	33	68	3-2
	3.300	3.200	32	66	3-1
SUPERSEDED	3.200	3.100	31	64	3-1-0
SUPERSEDED	3.100	3.000	30	62	2-9
	3.000	2.900	29	60	2-8
SUPERSEDED	2.900	2.800	28	58	2-7
SUPERSEDED	2.800	2.700	27	56	2-6
9 OBSOLETE	2.700	2.600	26	54	2-5
SUPERSEDED	2.600	2.500	25	52	2-4
	2.500	2.400	24	50	2-3
SUPERSEDED	2.400	2.300	23	48	2-2
	2.300	2.200	22	46	2-1
	2.200	2.100	21	44	2-0
	2.100	2.000	20	42	1-9
SUPERSEDED	2.000	1.900	19	40	1-8
SUPERSEDED	1.900	1.800	18	38	1-7
SUPERSEDED	1.800	1.700	17	36	1-6
9 OBSOLETE	1.700	1.600	16	34	1-5
9 OBSOLETE	1.600	1.500	15	32	1-4
9 OBSOLETE	1.500	1.400	14	30	1-3
9 OBSOLETE	1.400	1.300	13	28	1-2
	1.300	1.200	12	26	1-1
9 SUPERSEDED	1.200	1.100	11	24	1-0
9 OBSOLETE	1.100	1.000	10	22	1-9
	1.000	.900	9	20	1-8
	.900	.800	8	18	1-7
	.800	.700	7	16	1-6
	.700	.600	6	14	1-5
	.600	.500	5	12	1-4
	.500	.400	4	10	1-3
9 SUPERSEDED	.400	.300	3	8	1-2
	.300	.200	2	6	1 102393-1
C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	

- 1 .000030 GOLD IN THE CONTACT AREA, .000050-.000100 TIN-LEAD IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 2 TOLERANCE NON-CUMULATIVE.
- 3 .000030 GOLD IN THE CONTACT AREA, .000050-.000100 TIN IN THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- 4 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 5 OBSOLETE PART NUMBER
- 6 USE WITH 26-30 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 7 CONTACT IDENTIFICATION NUMBER "1" LOCATED IN THIS AREA.
- 8 AMP TRADEMARK (EITHER SIDE).
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L.D.RINGLEY 7-1-85
 CHK P.C.deJONG 7-1-85
 APVD P.C.deJONG 7-1-85

TE Connectivity

ASSEMBLY, MASS TERMINATION, AMPMODU, DOUBLE ROW, .100 X .100 CL, #26-#30 AWG WIRE SIZE

SIZE A2 CAGE CODE 00779 DRAWING NO C=102393 RESTRICTED TO -

SCALE 4:1 SHEET 1 of 1 REV S2

MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK CONTACTS: PHOS BRONZE

FINISH CONTACTS: SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± -
 3 PLC ± .005
 4 PLC ± -
 ANGLES ± -

CUSTOMER DRAWING