


A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

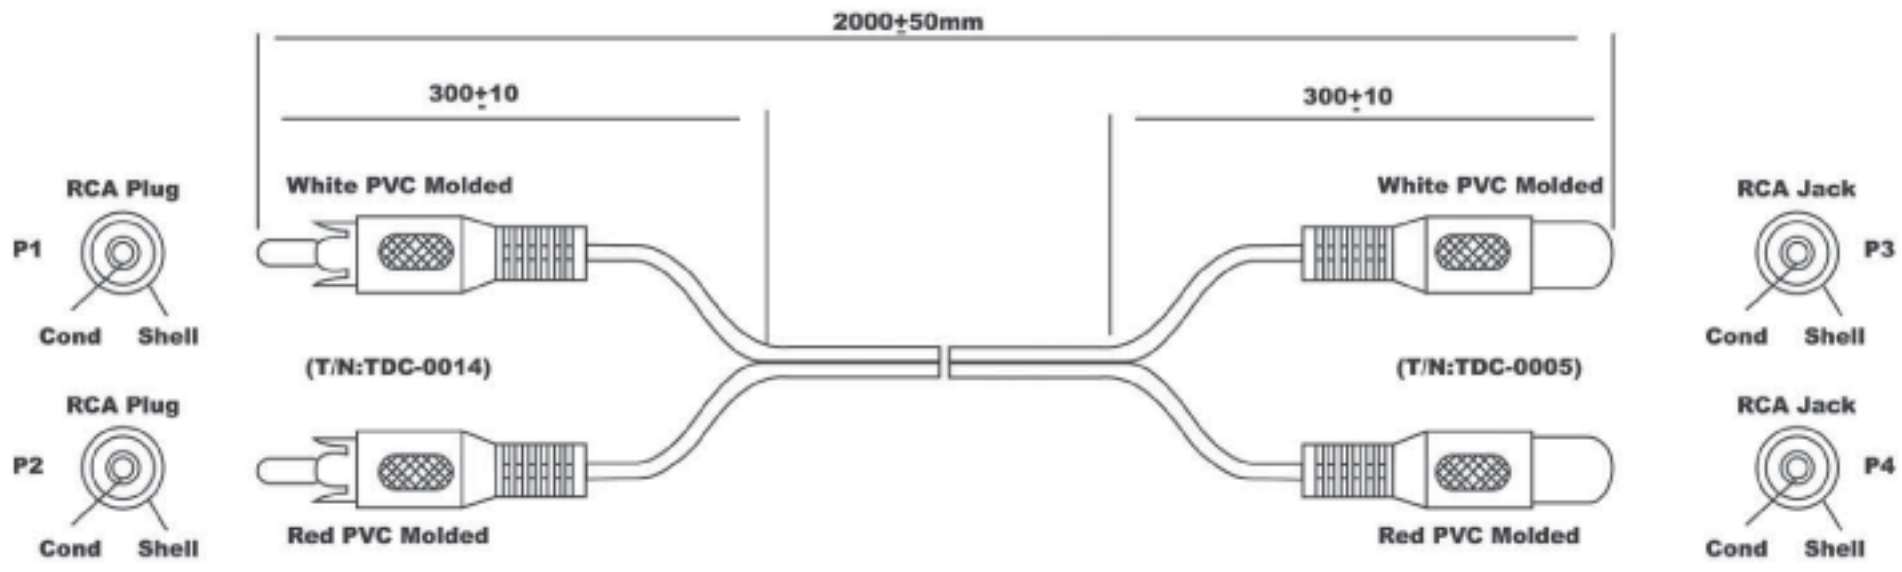

PIN Out		PIN Out	
P1	White	P3	Cond
Cond	Spiral	Cond	Shell
Shell		P2	Red
		Cond	Spiral
		Shell	
		P4	Cond
			Shell

**Material:**

- Cable: Non-UL [26(10/0.12)\*1C Tinned Copper Insulation: PVC+ Spiral Shield(28/0.12) Tinned Copper]\*2 Flat, Jacket; PVC OD:Ø2.8\*5.6±0.15mm Color: Black(NK-KO1)
- Connectors: P1&P2: RCA Plug Nickel Plated  
P3&P4: RCA Jack Nickel Plated
- Hood: P1&P3: Molded Type, PVC 45P, Color: White(NK-WO1)  
P3&P4: Molded Type, PVC 45P, Color: Red(NK-RO1)
- Test Request: <1>. 100% Open Short & MIS Wire Test  
<2>. Insulation Resistance: 1M min.
- Packing: Seep-0039 Rev.B Packing Drawing  
EAN Code: 4016032051329  
(Binding size must be smaller than blister)
- Blister Size: DB VP2



Scale	1:1							Name
TOLERANCE								Item No.
X.X	±0.40					Drawn	01.03.12	AK-CHMF-015-R (1.5M) AK-CHMF-R (2.0M)
X.XX	±0.25					Approved		AK-CHMF-025-R (2.5M) AK-CHMF-050-R (5.0M)
X.XXX	±0.15							Title
Angle	±3°							Cinch Connection Cable, Molded Hoods, 2 x Cinch Male to 2 x Cinch Female
								Drawing No.
								Replace
								Sheet
		Modification	Date	Name				



rev00