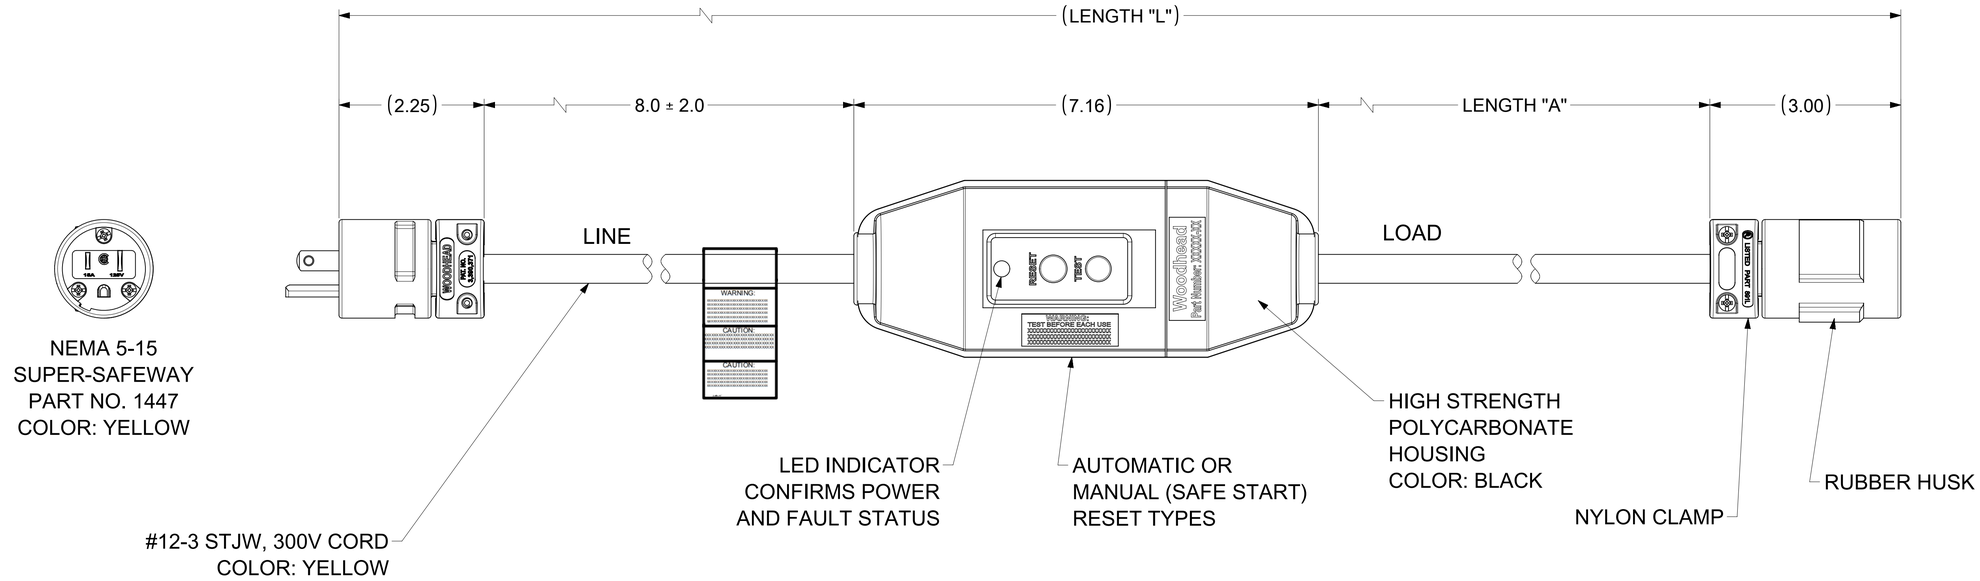



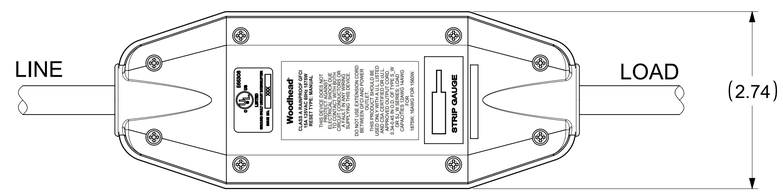

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530043	15051-1A	2 FT 7 IN	1 FT ± 1 IN	AUTO
1301530052	15051-6A	7 FT 7 IN	6 FT ± 2 IN	AUTO
1301530046	15051-25A	26 FT 7 IN	25 FT ± 2 IN	AUTO
1301530049	15051-50A	51 FT 7 IN	50 FT ± 4 IN	AUTO
1301530044	15051-1M	2 FT 7 IN	1 FT ± 1 IN	MANUAL
1301530053	15051-6M	7 FT 7 IN	6 FT ± 2 IN	MANUAL
1301530047	15051-25M	26 FT 7 IN	25 FT ± 2 IN	MANUAL
1301530050	15051-50M	51 FT 7 IN	50 FT ± 4 IN	MANUAL

TECHNICAL:

LISTED:	cULus
RATED SUPPLY VOLTAGE:	120 VAC
RATED CURRENT:	UP TO 15 AMPS OR CABLE RATING
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	90 AMP 125 VAC
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: FA = 0, FC = 0, FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
INCH	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	±	0.5 °
4 PLACES	±	
3 PLACES	±	
2 PLACES	±	0.13
1 PLACE	±	0.25
0 PLACES	±	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: MIGRATION TO ECTR/NX

EC NO: 684571
DRWN: VBASUTHKARP 2021/11/08
CHK'D: DNGUYEN62 2022/01/20
APPR: HKNEELAND 2022/02/02

INITIAL REVISION:
DRWN: HRUIZ01 2013/02/06
APPR: JFMURPHY 2015/04/20

molex

120V 15A INLINE GFCI
W/ 1447 & 1547 NEMA 5-15

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-130153-015	PSD	001	A1

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	D-SIZE	130153	SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2022/02/02 16:39:36

NORMAT_master-fb.prod D
REVISION: 27
DATE: 2021/05/01