

T1/CEPT/ISDN PRI Interface Transformer

Turns Ratio ($\pm 2\%$)

1CT:1.15CT & 1CT:1.15CT

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Electrical Specifications at 25°C



Parameter	Min.	Max.	Units
OCL (Primary)	1.2		mH
Leakage Inductance		0.6 & 0.6	μ H
Capacitance (C_{WW})		30	pF
Primary DC Resistance		0.70 & 0.70	ohms
Secondary DC Resistance		0.75 & 0.75	ohms
Isolation	1500		V_{RMS}

Parts shipped in anti-static tubes. 33 pieces per tube


Tape & Reel Available

Primary Pins 1-3 & 6-8

Physical Dimensions
inches (mm)

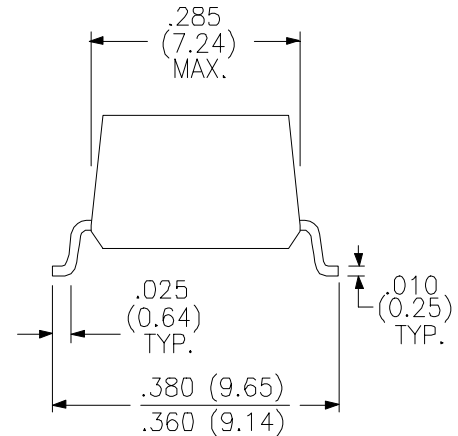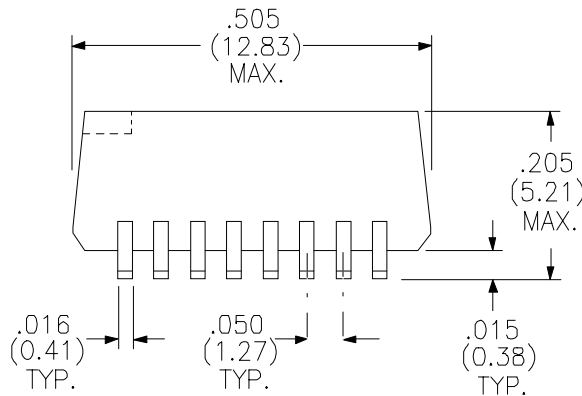

Schematic Diagram

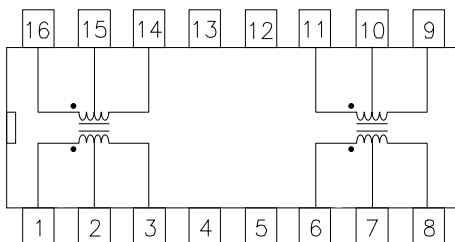

RHOMBUS P/N: T-14118

CUST P/N:

NAME:

DATE: 07/31/96

SHEET: 1 of 1