
SUYIN CONNECTOR

(MALE SOLDER P.C.B. MOUNT TYPE)

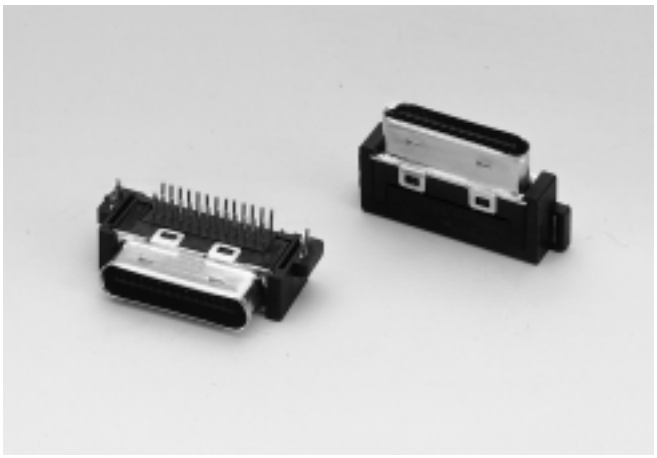


127120MR Series

Mates with SUYIN 127113, 127115 Series

Specifications:

- **26 Circuits**
- **Insulator Material** : Black High Temp. Plactic
- **Operating Temp.Range** : -40˚C to +105˚C
- **Terminal Material** : Phosphor Braoze
- **Plating** : Selective Plated (Gold/Tin)
  : Metal shell-Nickel Plated
- **Max. Current Rating** : 0.5A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V (Min. 60 Seconds)

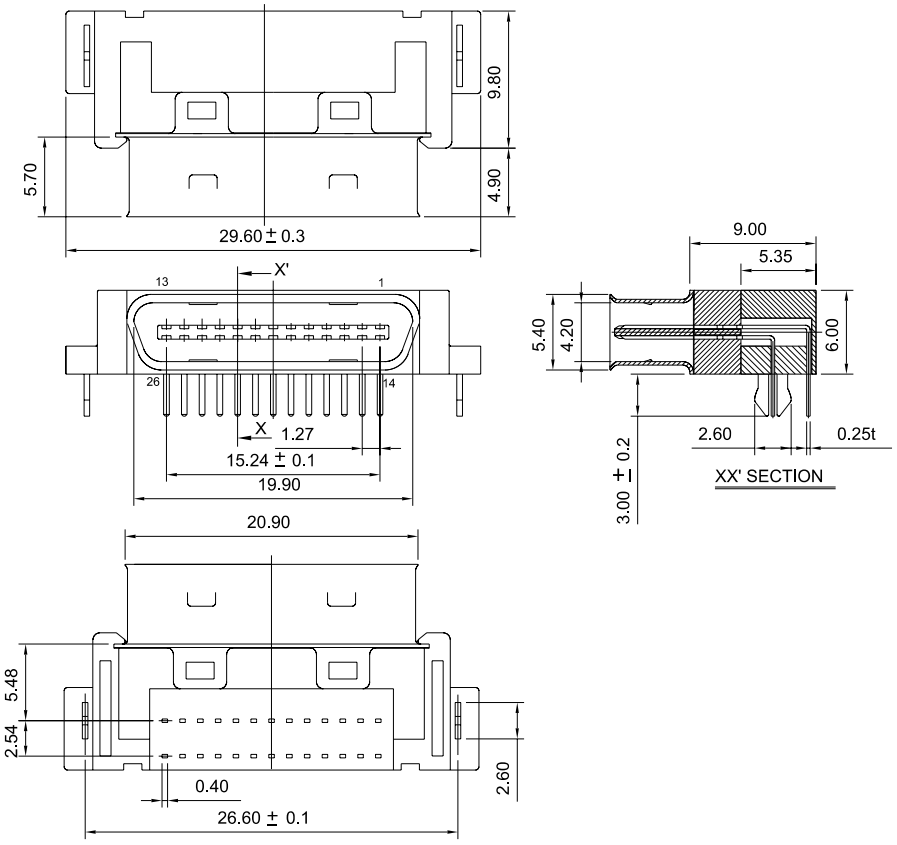

I/O


Order Information

127120MR026S500ZU
1 2 3 4 5

1. 'R' : Right Angle Dip Type
2. No. of Pins
3. Plating
   'S5' : 30u" selsctive gold in contact area
   /min. 100u"tin solder area
4. Color 'Z' : Black
5. Package
   'U' : Tube Package Without Cap

Reference Page 11

Recommended P.C.B Layout I

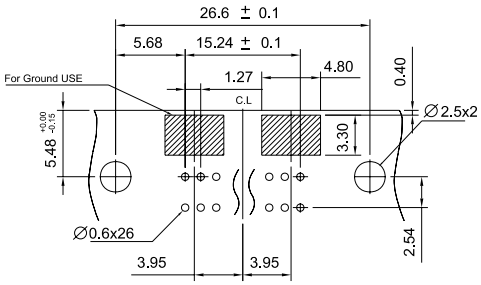

Recommended P.C.B Layout II

