



SoniCrest SPEAKER SOUND GENERATORS

HSR20L



Wire:UL1571 AWG#32

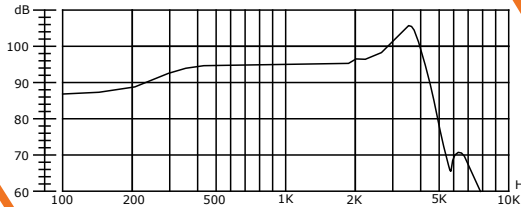

Dimensions

Unit : mm

Tolerance : ± 0.3 mm

Frequency Response

Applied Voltage: 10mW, Sine Wave
Based on IEC-R318 Standard

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (mW)	Maximum Input Power (mW)	*Sensitivity at 1KHz (dB)	*Frequency Range (Hz)	Total Harmonic Distortion (Hz)	Operating Temperature ($^{\circ}$ C)	Storage Temperature ($^{\circ}$ C)
150 \pm 15%	10	30	116 \pm 3	750 ~ 3000	<5%	-10 ~ +70	-10 ~ +70

HSR20L-150

The specification are only for 16 Ω version. Specification for other impedance is available upon request.

*Value applied: 10mW input power, based on IEC-R318 standard.