

## TPS7A7300 3A、快速瞬态响应、低压降稳压器

## 1 特性

- 低压降电压：3A 时为 240mV
- $V_{IN}$  范围：1.5 V 至 6.5 V
- 可配置的固定  $V_{OUT}$  范围：0.9V 至 3.5 V
- 可调节的  $V_{OUT}$  范围：0.9V 至 5V
- 非常出色的负载和线路瞬态响应
- 与陶瓷输出电容器一起工作时保持稳定
- 整个线路、负载和温度范围内的精度：2%
- 可编程软启动
- 电源正常 (PG) 输出
- 封装：5mm × 5mm，20 引脚 VQFN

## 2 应用

- 无线基础设施
- RF 组件
- 机顶盒
- PC 和打印机
- 音频和视觉

## 3 说明

TPS7A7300 低压降 (LDO) 稳压器设计用于追求极低压降功能的应用 (3A 时为 240mV)，此类应用的输入电压介于 1.5V 至 6.5V 之间。TPS7A7300 提供一个创新、用户可配置的输出电压设置，范围介于 0.9V 至 3.5V 之间，从而不需要使用外部电阻器并消除了任何与之相关的误差。


TPS7A7300 具有极快的负载瞬态响应，与陶瓷输出电容器一起工作时保持稳定，并且在线路、负载、和温度上所支持的精度优于 2%。一个软启动引脚使得应用能够减少到负载的涌入电流。此外，一个开漏、电源正常信号可实现电源轨排序。

TPS7A7300 提供 5mm × 5mm、20 引脚 VQFN 封装。


## 封装信息

| 器件型号      | 封装 <sup>(1)</sup> | 封装尺寸 <sup>(2)</sup> |
|-----------|-------------------|---------------------|
| TPS7A7300 | RGW (VQFN, 20)    | 5mm x 5mm           |

- (1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。
- (2) 封装尺寸 (长 × 宽) 为标称值，并包括引脚 (如适用)。

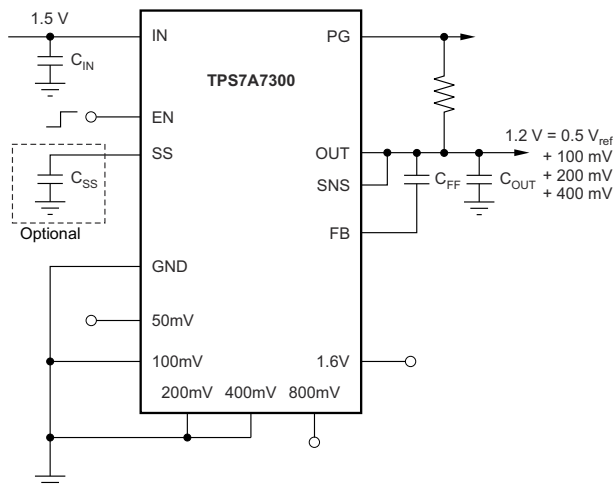

典型应用

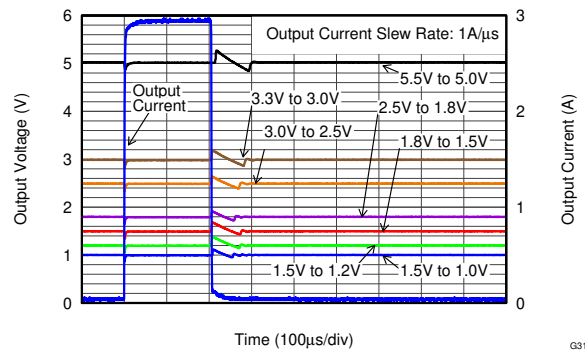

具有七种不同输出的负载瞬态响应

G312



## Table of Contents

|                                           |           |                                                                  |           |
|-------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                         | <b>1</b>  | <b>7 Application and Implementation</b> .....                    | <b>24</b> |
| <b>2 应用</b> .....                         | <b>1</b>  | 7.1 Application Information.....                                 | 24        |
| <b>3 说明</b> .....                         | <b>1</b>  | 7.2 Typical Application.....                                     | 24        |
| <b>4 Pin Configurations</b> .....         | <b>3</b>  | 7.3 Power Supply Recommendations.....                            | 27        |
| <b>5 Specifications</b> .....             | <b>4</b>  | 7.4 Layout.....                                                  | 28        |
| 5.1 Absolute Maximum Ratings.....         | 4         | <b>8 Device And Documentation Support</b> .....                  | <b>32</b> |
| 5.2 ESD Ratings.....                      | 4         | 8.1 Documentation Support.....                                   | 32        |
| 5.3 Recommended Operating Conditions..... | 4         | 8.2 接收文档更新通知.....                                                | 32        |
| 5.4 Thermal Information.....              | 5         | 8.3 支持资源.....                                                    | 32        |
| 5.5 Electrical Characteristics.....       | 6         | 8.4 Trademarks.....                                              | 32        |
| 5.6 Typical Characteristics.....          | 7         | 8.5 静电放电警告.....                                                  | 32        |
| <b>6 Detailed Description</b> .....       | <b>11</b> | 8.6 术语表.....                                                     | 32        |
| 6.1 Overview.....                         | 11        | <b>9 Revision History</b> .....                                  | <b>32</b> |
| 6.2 Functional Block Diagram.....         | 11        | <b>10 Mechanical, Packaging, And Orderable Information</b> ..... | <b>33</b> |
| 6.3 Feature Description.....              | 12        |                                                                  |           |
| 6.4 Device Functional Modes.....          | 23        |                                                                  |           |

## 4 Pin Configurations

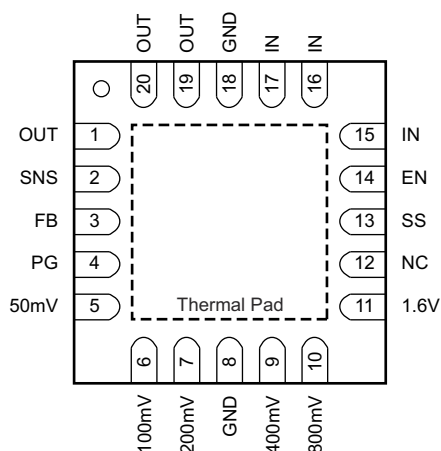


图 4-1. RGW Package, 20-Pin VQFN With Exposed Thermal Pad (Top View)

表 4-1. Pin Functions

| PIN                                                   |                       | I/O | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------|-----------------------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                                                  | RGW                   |     |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 50mV,<br>100mV,<br>200mV,<br>400mV,<br>800mV,<br>1.6V | 5, 6, 7,<br>9, 10, 11 | I   | Output voltage setting pins. These pins must be connected to ground or left floating. Connecting these pins to ground increases the output voltage by the value of the pin name; multiple pins can be simultaneously connected to GND to select the desired output voltage. Leave these pins floating (open) when not in use. See the <a href="#">User-Configurable Output Voltage</a> section for more details. |
| EN                                                    | 14                    | I   | Enable pin. Driving this pin to logic high enables the device; driving the pin to logic low disables the device. See the <a href="#">Enable</a> section for more details.                                                                                                                                                                                                                                        |
| FB                                                    | 3                     | I   | Output voltage feedback pin. Connected to the error amplifier. See the <a href="#">User-Configurable Output Voltage</a> and <a href="#">Traditional Adjustable Configuration</a> sections for more details. Connect a 220-pF ceramic capacitor from the FB pin to OUT.                                                                                                                                           |
| GND                                                   | 8, 18                 | —   | Ground pin.                                                                                                                                                                                                                                                                                                                                                                                                      |
| IN                                                    | 15, 16, 17            | I   | Unregulated supply voltage pin. Connect an input capacitor to this pin. See the <a href="#">Input Capacitor Requirements</a> section for more details.                                                                                                                                                                                                                                                           |
| NC                                                    | 12                    | —   | Not internally connected. The NC pin is not connected to any electrical node. This pin and the thermal pad must be connected to a large-area ground plane. See the <a href="#">Power Dissipation</a> section for more details.                                                                                                                                                                                   |
| OUT                                                   | 1, 19, 20             | O   | Regulated output pin. A 4.7- $\mu$ F or larger capacitance is required for stability. See the <a href="#">Output Capacitor Requirements</a> section for more details.                                                                                                                                                                                                                                            |
| PG                                                    | 4                     | O   | Active-high power good pin. An open-drain output that indicates when the output voltage reaches 90% of the target. See the <a href="#">Power-Good</a> section for more details.                                                                                                                                                                                                                                  |
| SNS                                                   | 2                     | I   | Output voltage sense input pin. See the <a href="#">User-Configurable Output Voltage</a> and <a href="#">Traditional Adjustable Configuration</a> sections for more details.                                                                                                                                                                                                                                     |
| SS                                                    | 13                    | —   | Soft-start pin. Leaving this pin open provides a soft start of the default setting. Connecting an external capacitor between this pin and ground enables the soft-start function by forming an RC-delay circuit in combination with the integrated resistance on the silicon. See the <a href="#">Soft-Start</a> section for more details.                                                                       |
| Thermal Pad                                           |                       | —   | The thermal pad must be connected to a large-area ground plane. If available, connect an electrically-floating, dedicated thermal plane to the thermal pad as well.                                                                                                                                                                                                                                              |

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating junction temperature range (unless otherwise noted)<sup>(1)</sup>

|             |                                              | MIN                | MAX                   | UNIT |
|-------------|----------------------------------------------|--------------------|-----------------------|------|
| Voltage     | IN, PG, EN                                   | – 0.3              | 7                     | V    |
|             | SS, FB, SNS, OUT                             | – 0.3              | $V_{IN} + 0.3^{(2)}$  | V    |
|             | 50 mV, 100 mV, 200 mV, 400 mV, 800 mV, 1.6 V | – 0.3              | $V_{OUT} + 0.3^{(2)}$ | V    |
| Current     | OUT                                          | Internally limited |                       | A    |
|             | PG (sink current into IC)                    |                    | 5                     | mA   |
| Temperature | Operating virtual junction, $T_J$            | – 55               | 160                   | °C   |
|             | Storage, $T_{stg}$                           | – 55               | 150                   | °C   |

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The absolute maximum rating is  $V_{IN} + 0.3$  V or +7 V, whichever is smaller.

### 5.2 ESD Ratings

|             |                         |                                                                                | VALUE | UNIT |
|-------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 | V    |
|             |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±500  |      |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 5.3 Recommended Operating Conditions

over operating junction temperature range (unless otherwise noted)

|           |                                                               | MIN   | NOM | MAX                | UNIT |
|-----------|---------------------------------------------------------------|-------|-----|--------------------|------|
| $V_{IN}$  | Supply voltage                                                | 1.425 |     | 6.5                | V    |
| $V_{OUT}$ | Output voltage                                                | 0.9   |     | 5                  | V    |
| $V_{EN}$  | Enable voltage                                                | 0     |     | 6.5                | V    |
| $V_{PG}$  | Pullup voltage                                                | 0     |     | 6.5                | V    |
|           | Any-out voltage: 50 mV, 100 mV, 200 mV, 400 mV, 800 mV, 1.6 V | 0     |     | $V_{OUT}$          | V    |
| $I_{OUT}$ | Output current                                                | 0     |     | 3                  | A    |
| $C_{OUT}$ | Output capacitance                                            | 4.7   |     | 200 <sup>(1)</sup> | μF   |
| $C_{FB}$  | Feedforward capacitance                                       | 0     |     | 100                | nF   |
| $T_J$     | Junction temperature                                          | – 40  |     | 125                | °C   |

(1) For output capacitors larger than 47 μF, a feedforward capacitor of at least 220 pF must be used.

## 5.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPS7A7300  | UNIT |
|-------------------------------|----------------------------------------------|------------|------|
|                               |                                              | RGW (VQFN) |      |
|                               |                                              | 20 PINS    |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 35.7       | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 33.6       | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 15.2       | °C/W |
| $\psi_{JT}$                   | Junction-to-top characterization parameter   | 0.4        | °C/W |
| $\psi_{JB}$                   | Junction-to-board characterization parameter | 15.4       | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | 3.8        | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics application note](#).

## 5.5 Electrical Characteristics

over operating temperature range ( $T_J = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ),  $1.425\text{ V} \leq V_{IN} \leq 6.5\text{ V}$ ,  $V_{IN} \geq V_{OUT(\text{TARGET})} + 0.3\text{ V}$  or  $V_{IN} \geq V_{OUT(\text{TARGET})} + 0.7\text{ V}$ <sup>(1) (2)</sup>, OUT connected to  $50\ \Omega$  to GND<sup>(4)</sup>,  $V_{EN} = 1.1\text{ V}$ ,  $C_{OUT} = 10\ \mu\text{F}$ ,  $C_{SS} = 10\text{ nF}$ ,  $C_{FF} = 0\text{ pF}$  (RGW package),  $C_{FF} = 220\text{ pF}$  (RGT package)<sup>(8)</sup>, and PG pin pulled up to  $V_{IN}$  with  $100\text{ k}\Omega$ ,  $27\text{ k}\Omega \leq R_2 \leq 33\text{ k}\Omega$  for adjustable configuration<sup>(3)</sup> (unless otherwise noted); typical values are at  $T_J = +25^{\circ}\text{C}$

| PARAMETER                  |                                                 | TEST CONDITIONS                                                                                                             | MIN           | TYP           | MAX           | UNIT                |
|----------------------------|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------|---------------|---------------|---------------------|
| $V_{IN}$                   | Input voltage range                             |                                                                                                                             | 1.425         |               | 6.5           | V                   |
| $V_{SS}$                   | SS pin voltage                                  |                                                                                                                             |               | 0.5           |               | V                   |
| $V_{OUT}$                  | Output voltage range                            | Adjustable with external feedback resistors                                                                                 | 0.9           |               | 5             | V                   |
|                            |                                                 | Fixed with voltage setting pins                                                                                             | 0.9           |               | 3.5           |                     |
|                            | Output voltage accuracy <sup>(5) (6)</sup>      | Adjustable, $25\text{ mA} \leq I_{OUT} \leq 3\text{ A}$                                                                     | - 2.0%        |               | 2.0%          |                     |
|                            |                                                 | Fixed, $25\text{ mA} \leq I_{OUT} \leq 3\text{ A}$                                                                          | - 3.0%        |               | 3%            |                     |
| $\Delta V_{O(\Delta V_I)}$ | Line regulation                                 | $I_{OUT} = 25\text{ mA}$                                                                                                    |               | 0.01          |               | %/V                 |
| $\Delta V_{O(\Delta I_O)}$ | Load regulation                                 | $25\text{ mA} \leq I_{OUT} \leq 3\text{ A}$                                                                                 |               | 0.1           |               | %/A                 |
| $V_{DO}$                   | Dropout voltage <sup>(7)</sup>                  | $V_{OUT} \leq 3.3\text{ V}$ , $I_{OUT} = 3\text{ A}$ , $V_{FB} = \text{GND}$                                                |               |               | 240           | mV                  |
|                            |                                                 | $3.3\text{ V} < V_{OUT}$ , $I_{OUT} = 3\text{ A}$ , $V_{FB} = \text{GND}$                                                   |               |               | 700           |                     |
| $I_{LIM}$                  | Output current limit                            | $V_{OUT}$ forced at $0.9 \times V_{OUT(\text{TARGET})}$ , $V_{IN} = 3.3\text{ V}$ , $V_{OUT(\text{TARGET})} = 0.9\text{ V}$ |               | 3.6           |               | A                   |
| $I_{GND}$                  | GND pin current                                 | Full load, $I_{OUT} = 3\text{ A}$                                                                                           |               | 3.7           |               | mA                  |
|                            |                                                 | Minimum load, $V_{IN} = 6.5\text{ V}$ , $V_{OUT(\text{TARGET})} = 0.9\text{ V}$ , $I_{OUT} = 25\text{ mA}$                  |               |               | 4             |                     |
|                            |                                                 | Shutdown, PG = (open), $V_{IN} = 6.5\text{ V}$ , $V_{OUT(\text{TARGET})} = 0.9\text{ V}$ , $V_{EN} < 0.5\text{ V}$          |               | 0.1           | 5             | $\mu\text{A}$       |
| $I_{EN}$                   | EN pin current                                  | $V_{IN} = 6.5\text{ V}$ , $V_{EN} = 0\text{ V}$ and $6.5\text{ V}$                                                          |               |               | $\pm 0.1$     | $\mu\text{A}$       |
| $V_{IL(EN)}$               | EN pin low-level input voltage (disable device) |                                                                                                                             | 0             |               | 0.5           | V                   |
| $V_{IH(EN)}$               | EN pin high-level input voltage (enable device) |                                                                                                                             | 1.1           |               | 6.5           | V                   |
| $V_{IT(PG)}$               | PG pin threshold                                | For the direction PG $\downarrow$ with decreasing $V_{OUT}$                                                                 | $0.85V_{OUT}$ | $0.9V_{OUT}$  | $0.96V_{OUT}$ | V                   |
| $V_{HYS(PG)}$              | PG pin hysteresis                               | For PG $\uparrow$                                                                                                           |               | $0.02V_{OUT}$ |               | V                   |
| $V_{OL(PG)}$               | PG pin low-level output voltage                 | $V_{OUT} < V_{IT(PG)}$ , $I_{PG} = -1\text{ mA}$ (current into device)                                                      |               |               | 0.4           | V                   |
| $I_{LKG(PG)}$              | PG pin leakage current                          | $V_{OUT} > V_{IT(PG)}$ , $V_{PG} = 6.5\text{ V}$                                                                            |               |               | 1             | $\mu\text{A}$       |
| $I_{SS}$                   | SS pin charging current                         | $V_{SS} = \text{GND}$ , $V_{IN} = 3.3\text{ V}$                                                                             | 3.5           | 5.1           | 7.2           | $\mu\text{A}$       |
| $V_n$                      | Output noise voltage                            | BW = 100 Hz to 100 kHz, $V_{IN} = 1.5\text{ V}$ , $V_{OUT} = 1.2\text{ V}$ , $I_{OUT} = 3\text{ A}$                         |               | 39.46         |               | $\mu\text{V}_{RMS}$ |
| $T_{SD}$                   | Thermal shutdown temperature                    | Shutdown, temperature increasing                                                                                            |               | 160           |               | $^{\circ}\text{C}$  |
|                            |                                                 | Reset, temperature decreasing                                                                                               |               | 140           |               |                     |
| $T_J$                      | Operating junction temperature                  |                                                                                                                             | - 40          |               | 125           | $^{\circ}\text{C}$  |

- (1) When  $V_{OUT} \leq 3.5\text{ V}$ ,  $V_{IN} \geq (V_{OUT} + 0.3\text{ V})$  or  $1.425\text{ V}$ , whichever is greater; when  $V_{OUT} > 3.5\text{ V}$ ,  $V_{IN} \geq (V_{OUT} + 0.7\text{ V})$ .
- (2)  $V_{OUT(\text{TARGET})}$  is the calculated target  $V_{OUT}$  value from the output voltage setting pins: 50mV, 100mV, 200mV, 400mV, 800mV, and 1.6V in fixed configuration, or the expected  $V_{OUT}$  value set by external feedback resistors in adjustable configuration.
- (3)  $R_2$  is the bottom-side of the feedback resistor between the FB pin and GND. See the [Traditional Adjustable Configuration](#) section for details.
- (4) This  $50\text{-}\Omega$  load is disconnected when the test conditions specify an  $I_{OUT}$  value.
- (5) When the TPS7A7300 is connected to external feedback resistors at the FB pin, external resistor tolerances are not included.
- (6) The TPS7A7300 is not tested at  $V_{OUT} = 0.9\text{ V}$ ,  $2.7\text{ V} \leq V_{IN} \leq 6.5\text{ V}$ , and  $500\text{ mA} \leq I_{OUT} \leq 3\text{ A}$  because the power dissipation is higher than the maximum rating of the package. Also, this accuracy specification does not apply on any application condition that exceeds the power dissipation limit of the package.
- (7)  $V_{DO}$  is not defined for output voltage settings less than 1.2 V.
- (8)  $C_{FF}$  is the capacitor between FB pin and OUT.

## 5.6 Typical Characteristics

at  $T_J = 25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(TARGET)} + 0.3\text{ V}$ ,  $I_{OUT} = 25\text{ mA}$ ,  $V_{(EN)} = V_{IN}$ ,  $C_{IN} = 10\text{ }\mu\text{F}$ ,  $C_{OUT} = 10\text{ }\mu\text{F}$ ,  $C_{(SS)} = 10\text{ nF}$ , and the PG pin pulled up to  $V_{IN}$  with a 100-k $\Omega$  pullup resistor (unless otherwise noted)

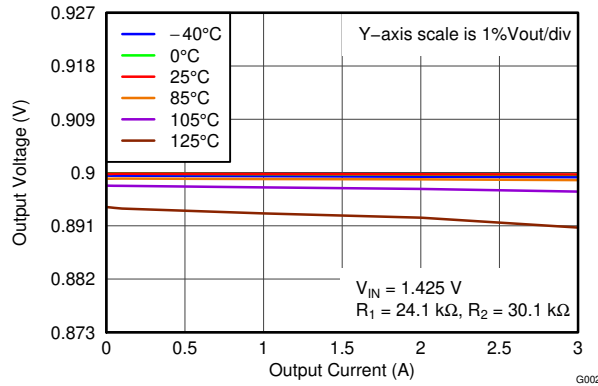


图 5-1. Load Regulation (0.9 V, Adjustable)

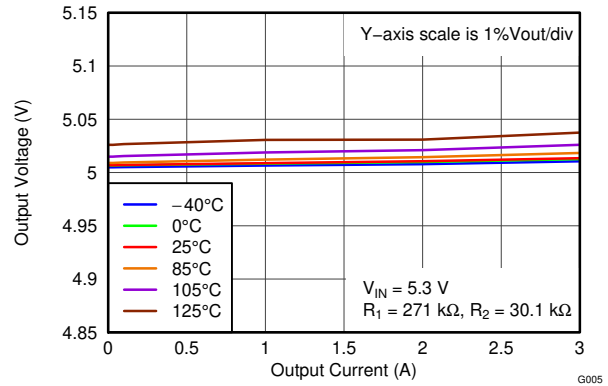


图 5-2. Load Regulation (5.0 V, Adjustable)

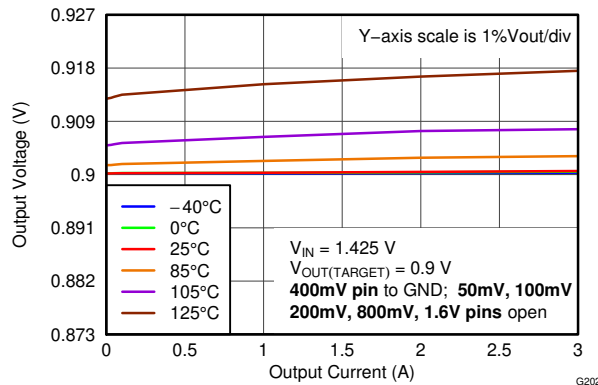


图 5-3. Load Regulation (0.9 V, Fixed By Setting Pins)

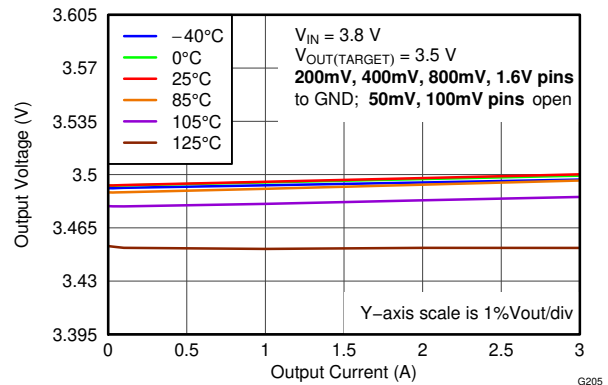


图 5-4. Load Regulation (3.5 V, Fixed By Setting Pins)

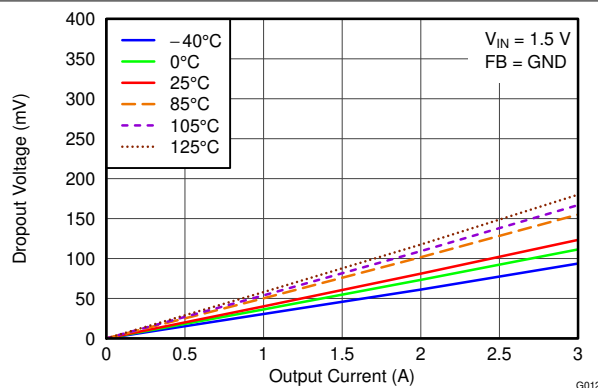


图 5-5. Dropout Voltage vs Output Current

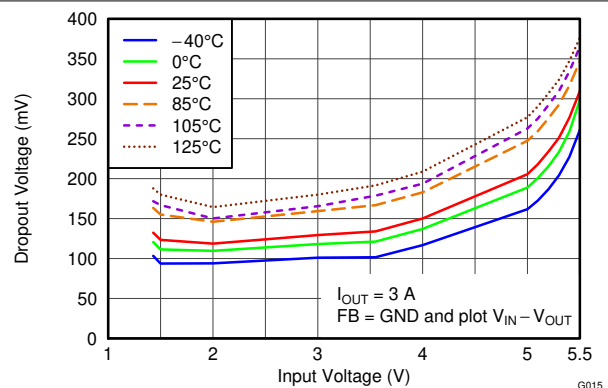


图 5-6. Dropout Voltage vs Temperature

## 5.6 Typical Characteristics (continued)

at  $T_J = 25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(TARGET)} + 0.3\text{ V}$ ,  $I_{OUT} = 25\text{ mA}$ ,  $V_{(EN)} = V_{IN}$ ,  $C_{IN} = 10\text{ }\mu\text{F}$ ,  $C_{OUT} = 10\text{ }\mu\text{F}$ ,  $C_{SS} = 10\text{ nF}$ , and the PG pin pulled up to  $V_{IN}$  with a 100-k $\Omega$  pullup resistor (unless otherwise noted)

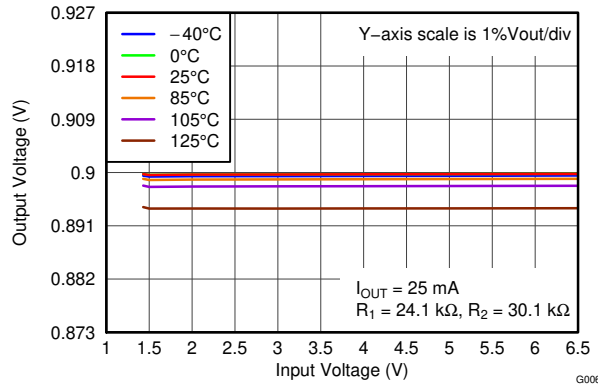


图 5-7. Line Regulation (0.9 V, Adjustable)

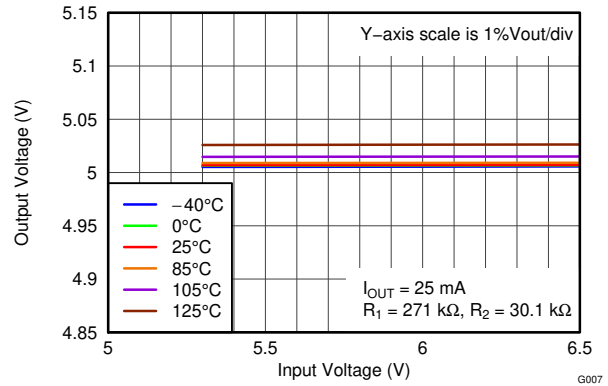


图 5-8. Line Regulation (5 V, Adjustable)

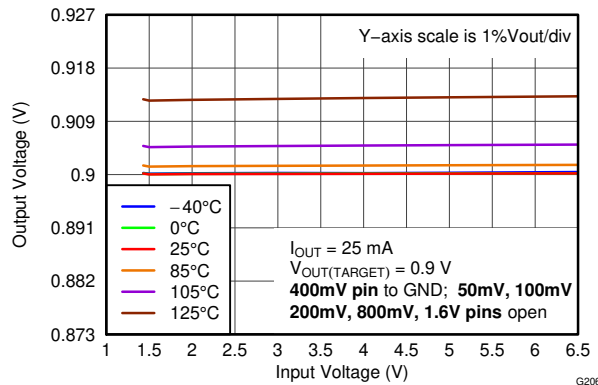


图 5-9. Line Regulation (0.9 V, Fixed By Setting Pins)

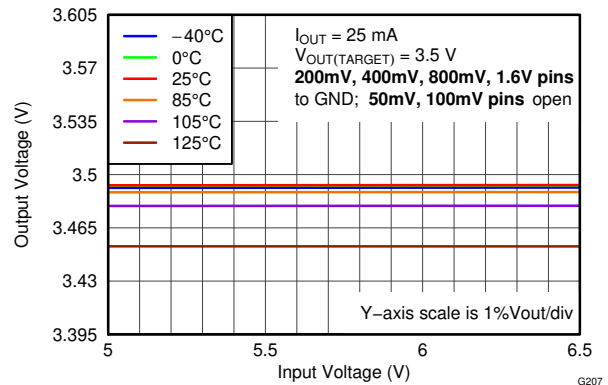


图 5-10. Line Regulation (3.5 V, Fixed By Setting Pins)

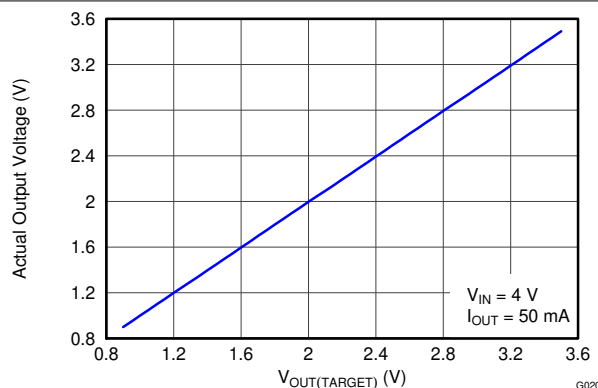


图 5-11. Measured Output Voltage vs Pin Setting

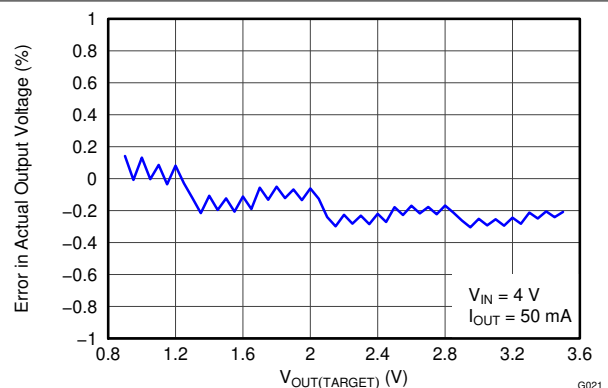


图 5-12. Accuracy vs Pin Setting

## 5.6 Typical Characteristics (continued)

at  $T_J = 25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(TARGET)} + 0.3\text{ V}$ ,  $I_{OUT} = 25\text{ mA}$ ,  $V_{(EN)} = V_{IN}$ ,  $C_{IN} = 10\text{ }\mu\text{F}$ ,  $C_{OUT} = 10\text{ }\mu\text{F}$ ,  $C_{(SS)} = 10\text{ nF}$ , and the PG pin pulled up to  $V_{IN}$  with a  $100\text{-k}\Omega$  pullup resistor (unless otherwise noted)

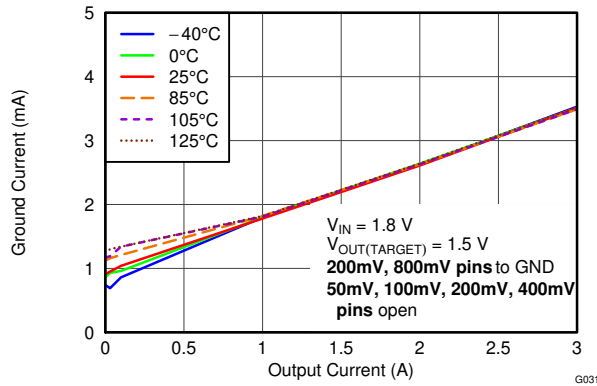


图 5-13. GND Pin Current vs Output Current

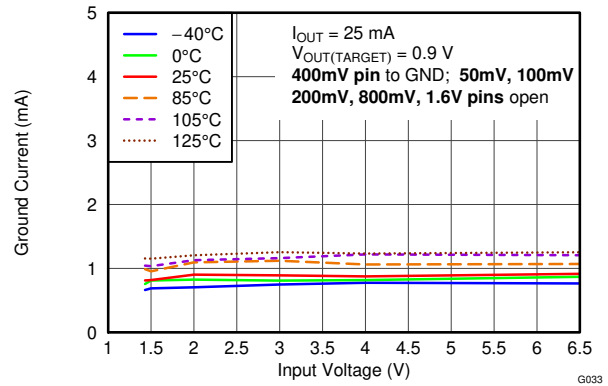


图 5-14. GND Pin Current vs Input Voltage

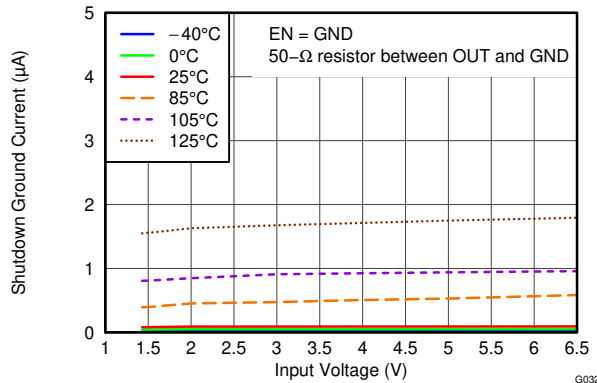


图 5-15. GND Pin Current In Shutdown vs Temperature

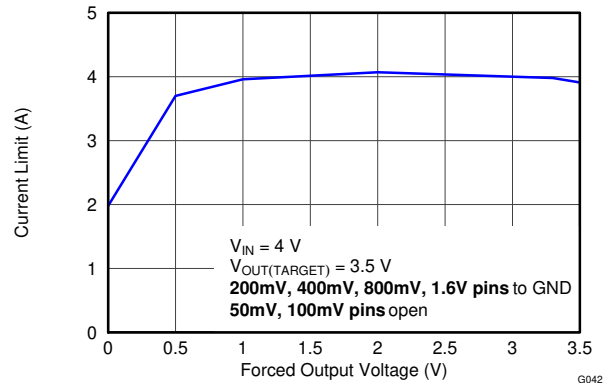


图 5-16. Current Limit vs Output Voltage (Foldback)

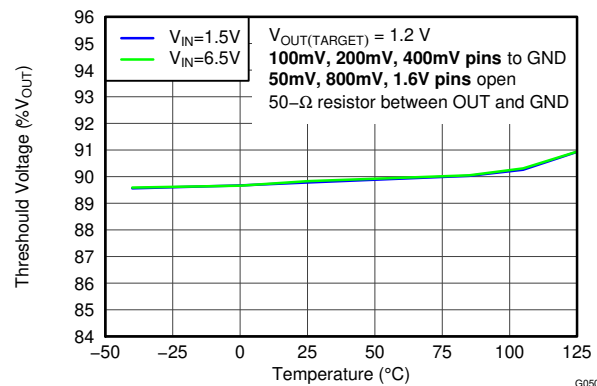


图 5-17. Power-Good Threshold Voltage vs Temperature

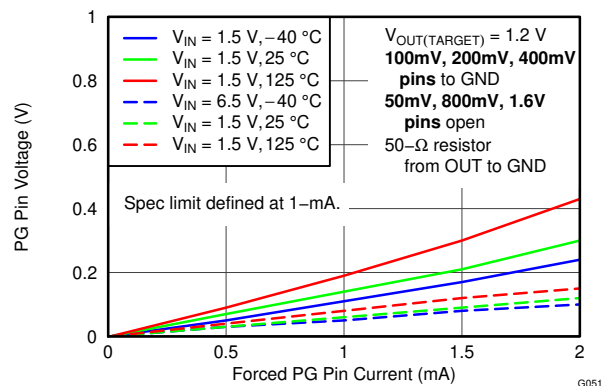


图 5-18. Power-Good Pin Drive Capability

## 5.6 Typical Characteristics (continued)

at  $T_J = 25^\circ\text{C}$ ,  $V_{IN} = V_{OUT(TARGET)} + 0.3\text{ V}$ ,  $I_{OUT} = 25\text{ mA}$ ,  $V_{(EN)} = V_{IN}$ ,  $C_{IN} = 10\text{ }\mu\text{F}$ ,  $C_{OUT} = 10\text{ }\mu\text{F}$ ,  $C_{SS} = 10\text{ nF}$ , and the PG pin pulled up to  $V_{IN}$  with a 100-k $\Omega$  pullup resistor (unless otherwise noted)

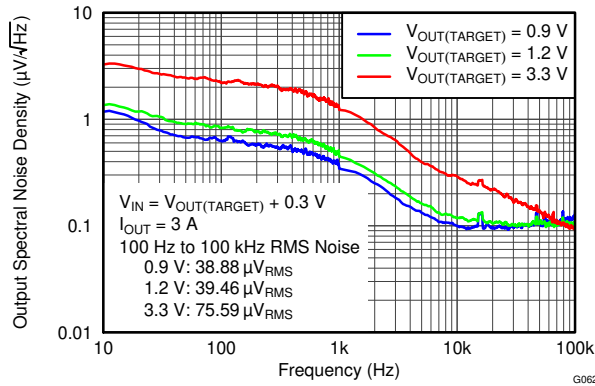


图 5-19. Noise Spectral Density By Output Voltage

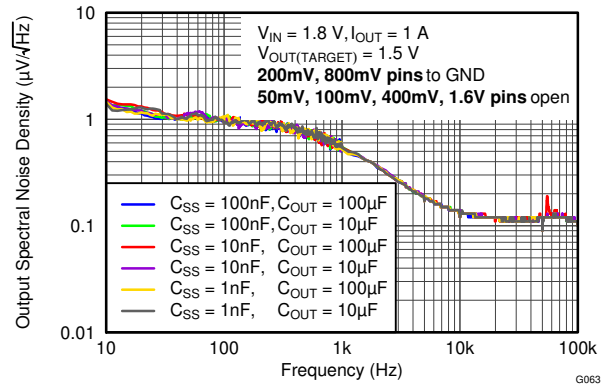


图 5-20. Noise Spectral Density By External Capacitors

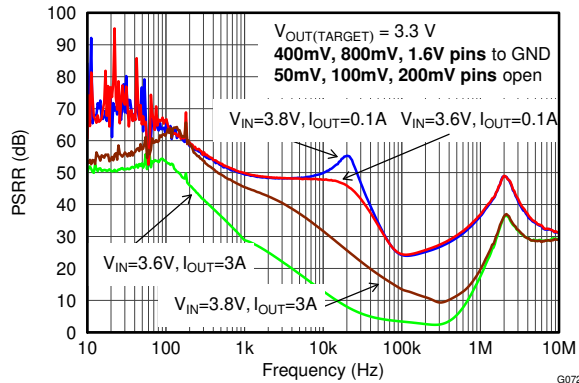


图 5-21. Power-Supply Ripple Rejection vs Frequency

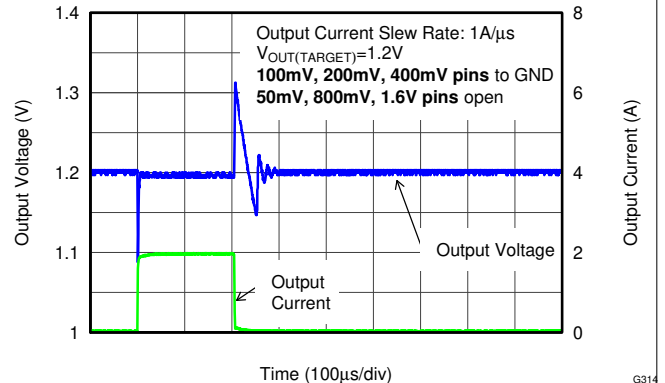


图 5-22. Load Transient Response ( $V_{OUT} = 1.2\text{ V}$ )


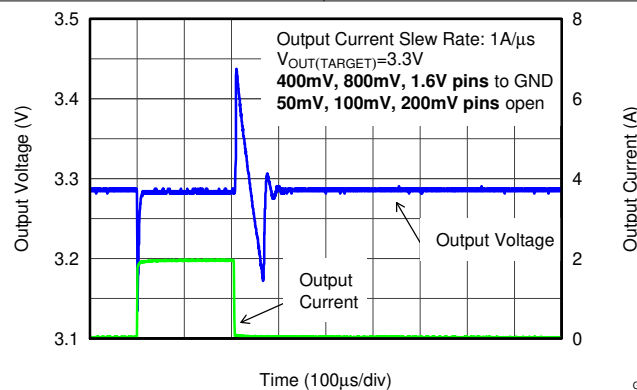


图 5-23. Load Transient Response ( $V_{OUT} = 3.3\text{ V}$ )

## 6.2 Functional Block Diagram

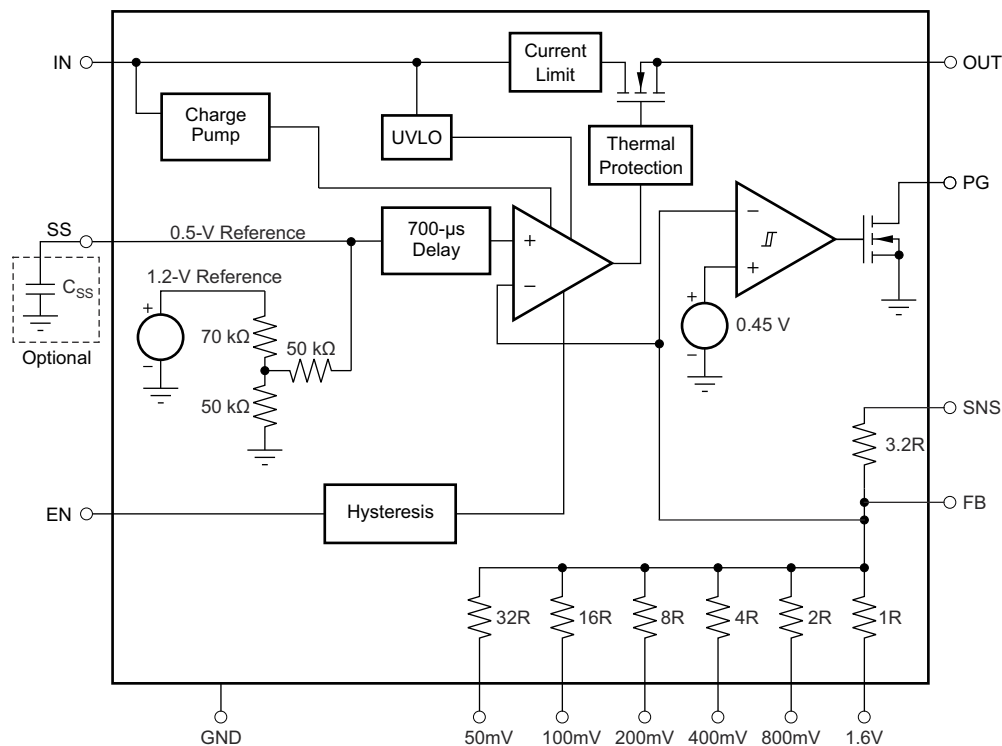

## 6.3 Feature Description

### 6.3.1 User-Configurable Output Voltage

Unlike traditional LDO devices, the TPS7A7300 comes with only one orderable part number. There is no adjustable or fixed output voltage option. The output voltage of the TPS7A7300 is selectable in accordance with the names given to the output voltage setting pins: 50 mV, 100 mV, 200 mV, 400 mV, 800 mV, and 1.6 V. For each pin connected to the ground, the output voltage setting increases by the value associated with that pin name, starting from the value of the reference voltage of 0.5 V. Floating the pins has no effect on the output voltage. 图 6-1 through 图 6-6 show examples of how to program the output voltages.


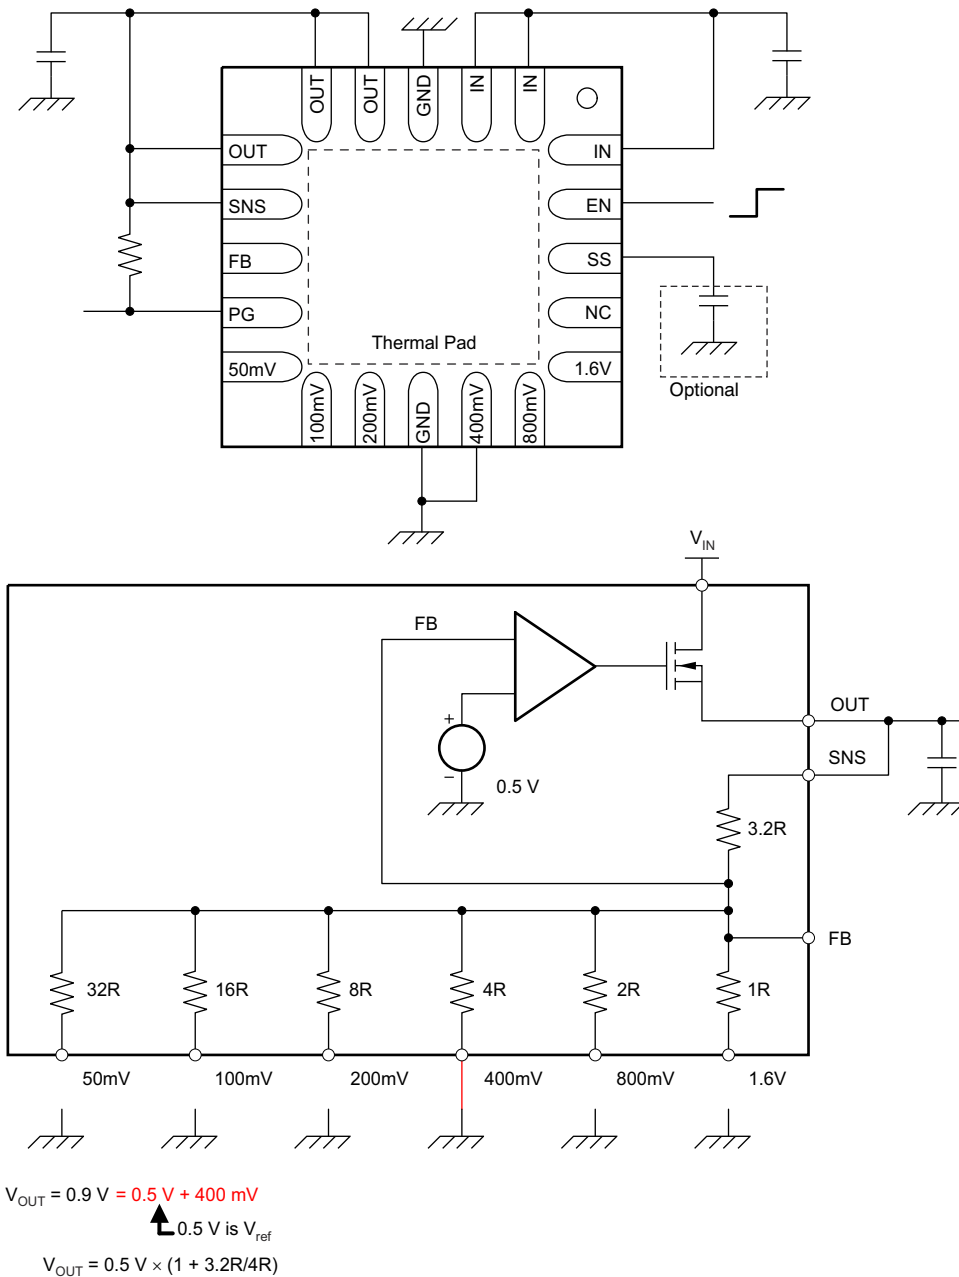


图 6-1. 0.9-V Configuration

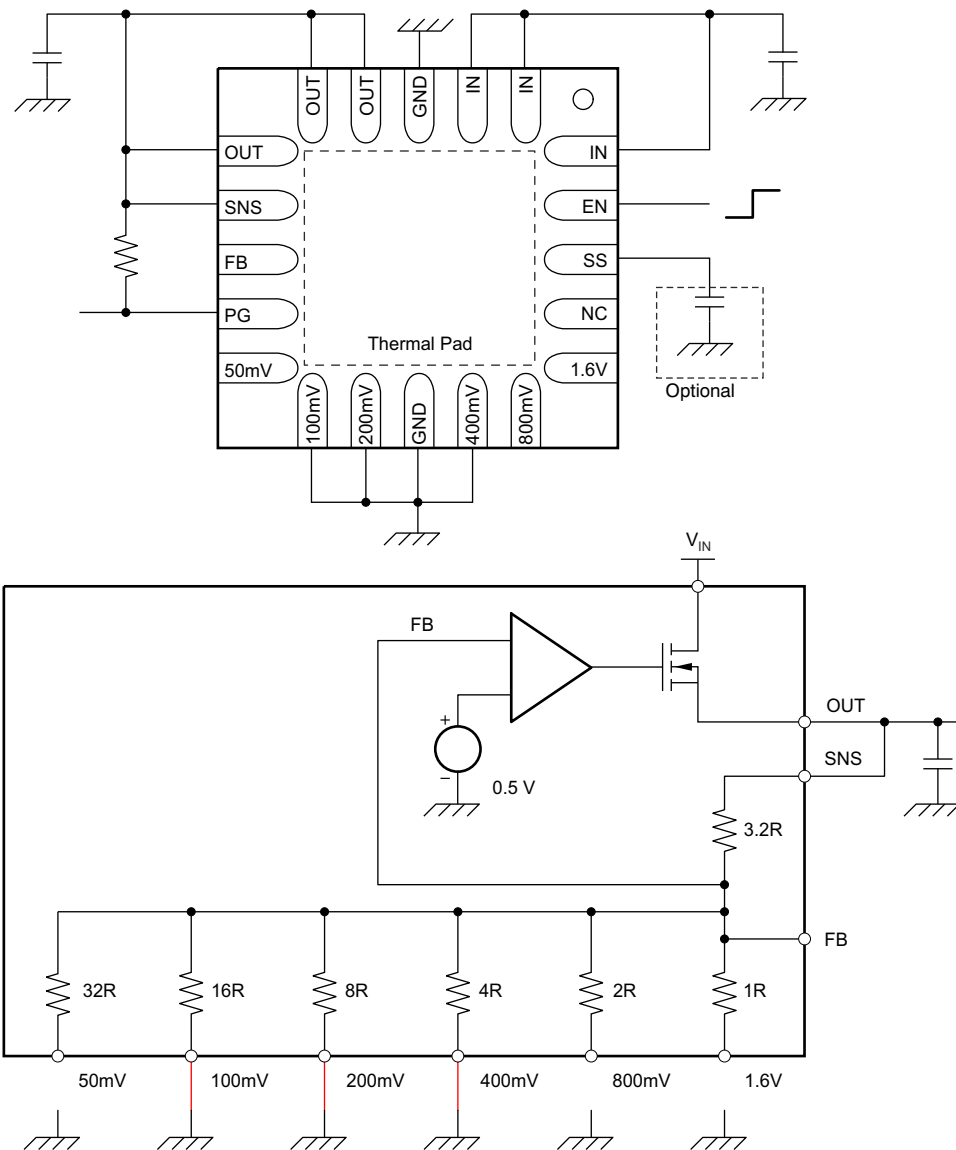


$$V_{OUT} = 1.2\text{ V} = 0.5\text{ V} + 100\text{ mV} + 200\text{ mV} + 400\text{ mV}$$

0.5 V is  $V_{ref}$

$$V_{OUT} = 0.5\text{ V} \times (1 + 3.2\text{R}/2.29\text{R}) \quad 2.29\text{R is parallel resistance of } 16\text{R}, 8\text{R}, \text{ and } 4\text{R}.$$

图 6-2. 1.2-V Configuration

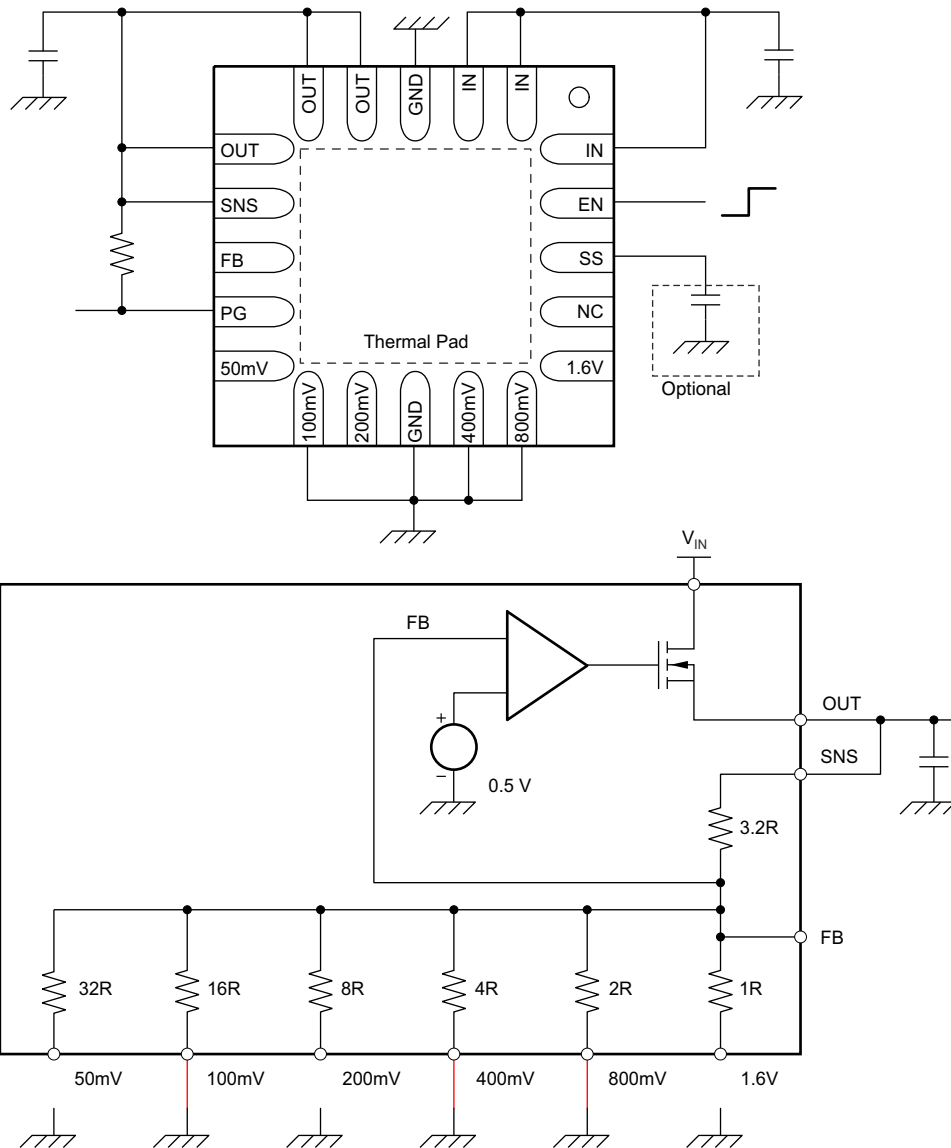


$$V_{OUT} = 1.8\text{ V} = 0.5\text{ V} + 100\text{ mV} + 400\text{ mV} + 800\text{ mV}$$

0.5 V is  $V_{ref}$

$$V_{OUT} = 0.5\text{ V} \times (1 + 3.2\text{R}/1.23\text{R}) \quad 1.23\text{R is parallel resistance of } 16\text{R}, 4\text{R}, \text{ and } 2\text{R}.$$

图 6-3. 1.8-V Configuration

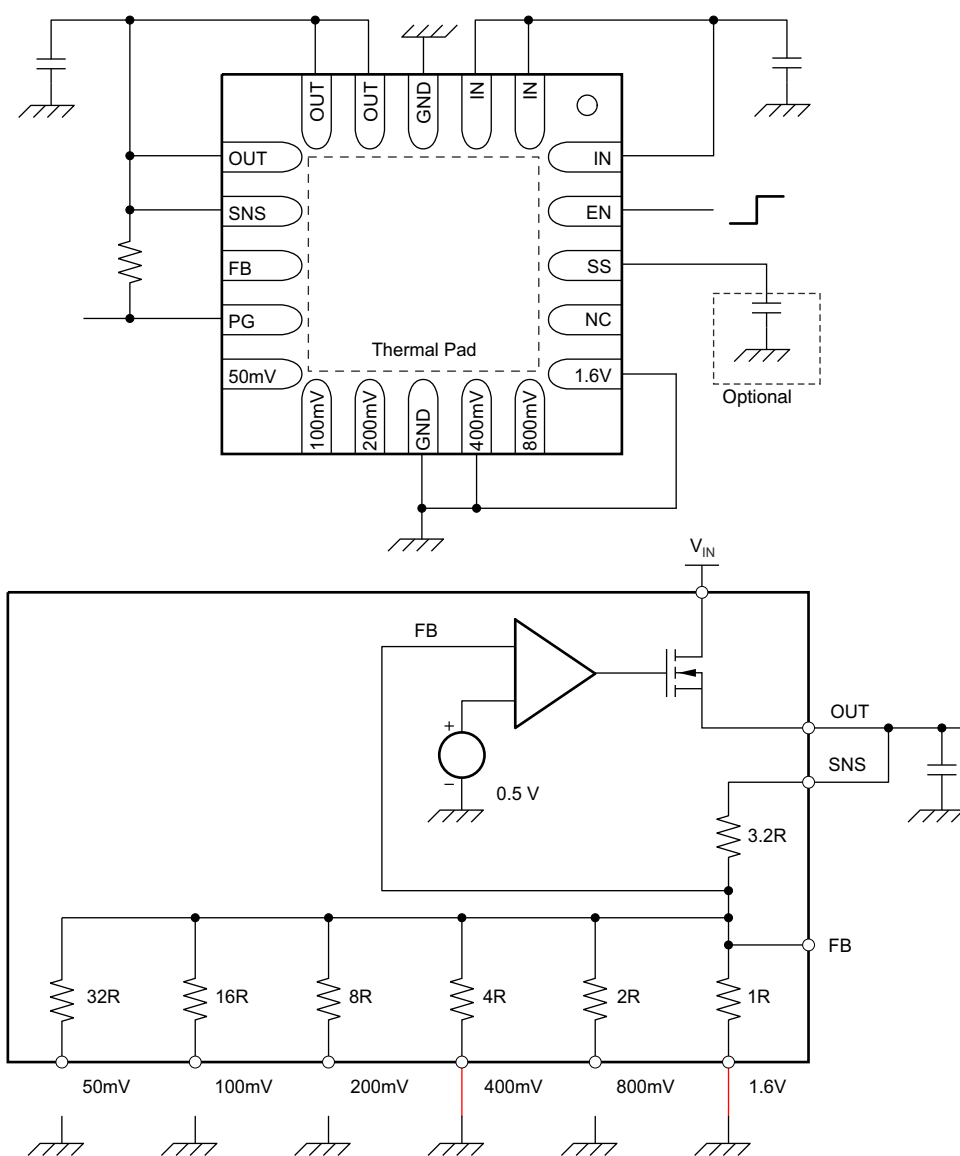


$$V_{OUT} = 2.5\text{ V} = 0.5\text{ V} + 400\text{ mV} + 1.6\text{ V}$$

0.5 V is  $V_{ref}$

$$V_{OUT} = 0.5\text{ V} \times (1 + 3.2\text{R}/0.8\text{R}) \quad 0.8\text{R is parallel resistance of } 4\text{R and } 1\text{R}.$$

图 6-4. 2.5-V Configuration

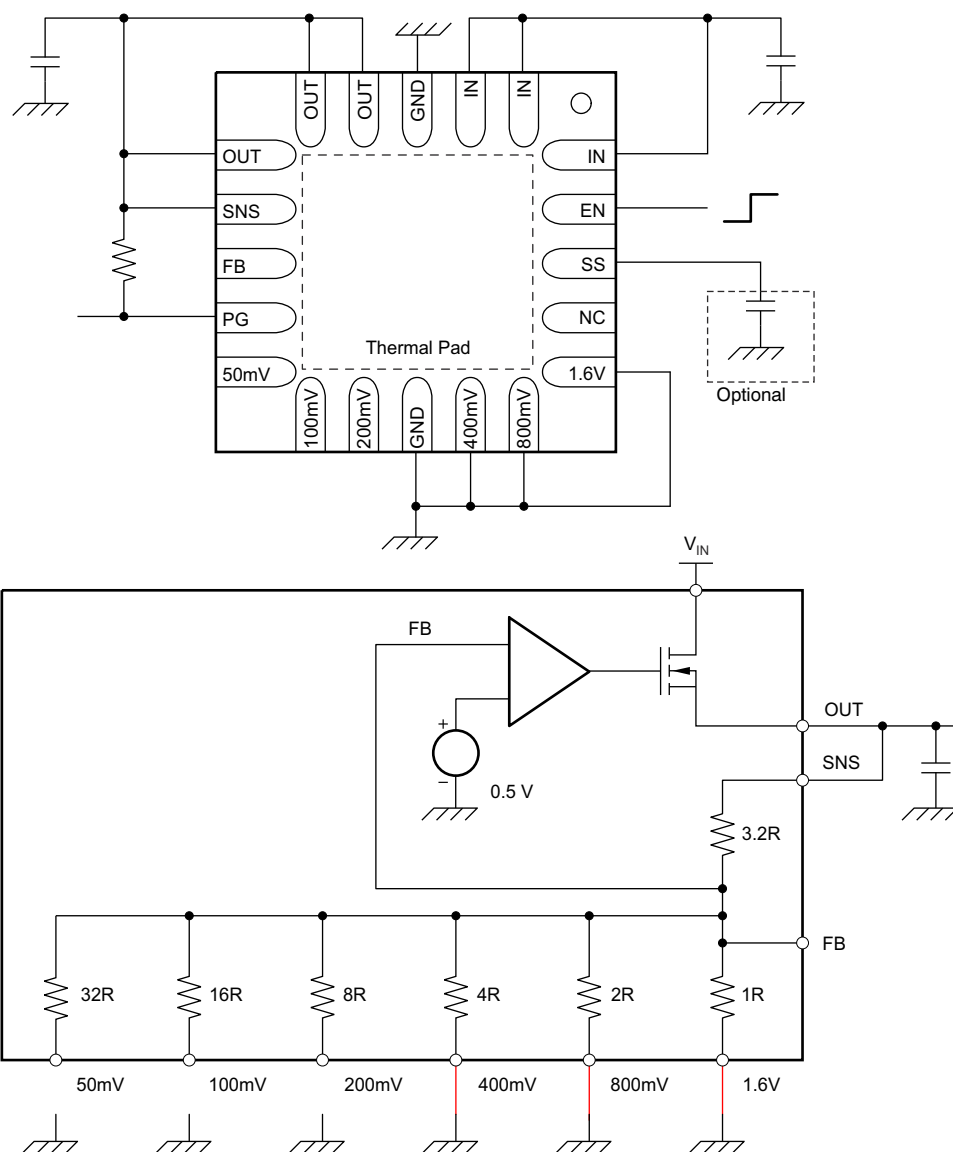

$$V_{OUT} = 3.3\text{ V} = 0.5\text{ V} + 400\text{ mV} + 800\text{ mV} + 1.6\text{ V}$$

↑ 0.5 V is  $V_{ref}$

$$V_{OUT} = 0.5\text{ V} \times (1 + 3.2\text{R}/0.571\text{R}) \quad 0.571\text{R is parallel resistance of } 4\text{R}, 2\text{R}, \text{ and } 1\text{R}.$$

图 6-5. 3.3-V Configuration

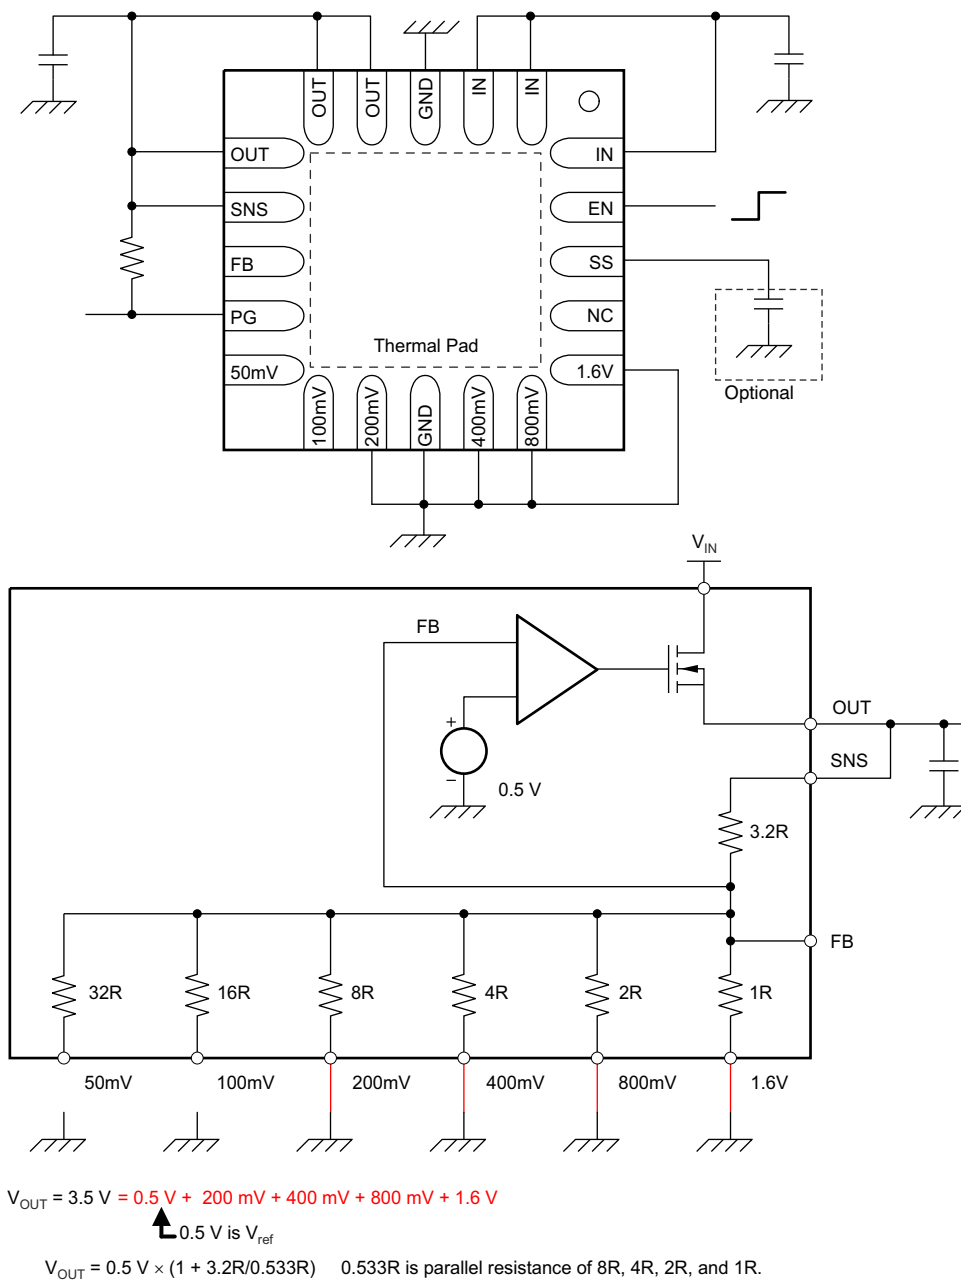


图 6-6. 3.5-V Configuration

See 表 6-1 for a full list of target output voltages and corresponding pin settings. The voltage setting pins have a binary weight; therefore, the output voltage can be programmed to any value from 0.9 V to 3.5 V in 50-mV steps.

图 5-11 and 图 5-12 illustrate this output voltage programming performance.

## 备注

Any output voltage setting that is not listed in 表 6-1 is not covered in the *Electrical Characteristics*. For output voltages greater than 3.5 V, use a traditional adjustable configuration (see the *Traditional Adjustable Configuration* section).

表 6-1. User Configurable Output Voltage Setting

| V <sub>OUT(TARGET)</sub><br>(V) | 50 mV | 100 mV | 200 mV | 400 mV | 800 mV | 1.6 V |
|---------------------------------|-------|--------|--------|--------|--------|-------|
| 0.9                             | open  | open   | open   | GND    | open   | open  |
| 0.95                            | GND   | open   | open   | GND    | open   | open  |
| 1                               | open  | GND    | open   | GND    | open   | open  |
| 1.05                            | GND   | GND    | open   | GND    | open   | open  |
| 1.1                             | open  | open   | GND    | GND    | open   | open  |
| 1.15                            | GND   | open   | GND    | GND    | open   | open  |
| 1.2                             | open  | GND    | GND    | GND    | open   | open  |
| 1.25                            | GND   | GND    | GND    | GND    | open   | open  |
| 1.3                             | open  | open   | open   | open   | GND    | open  |
| 1.35                            | GND   | open   | open   | open   | GND    | open  |
| 1.4                             | open  | GND    | open   | open   | GND    | open  |
| 1.45                            | GND   | GND    | open   | open   | GND    | open  |
| 1.5                             | open  | open   | GND    | open   | GND    | open  |
| 1.55                            | GND   | open   | GND    | open   | GND    | open  |
| 1.6                             | open  | GND    | GND    | open   | GND    | open  |
| 1.65                            | GND   | GND    | GND    | open   | GND    | open  |
| 1.7                             | open  | open   | open   | GND    | GND    | open  |
| 1.75                            | GND   | open   | open   | GND    | GND    | open  |
| 1.8                             | open  | GND    | open   | GND    | GND    | open  |
| 1.85                            | GND   | GND    | open   | GND    | GND    | open  |
| 1.9                             | open  | open   | GND    | GND    | GND    | open  |
| 1.95                            | GND   | open   | GND    | GND    | GND    | open  |
| 2                               | open  | GND    | GND    | GND    | GND    | open  |
| 2.05                            | GND   | GND    | GND    | GND    | GND    | open  |
| 2.1                             | open  | open   | open   | open   | open   | GND   |
| 2.15                            | GND   | open   | open   | open   | open   | GND   |
| 2.2                             | open  | GND    | open   | open   | open   | GND   |
| 2.25                            | GND   | GND    | open   | open   | open   | GND   |
| 2.3                             | open  | open   | GND    | open   | open   | GND   |
| 2.35                            | GND   | open   | GND    | open   | open   | GND   |
| 2.4                             | open  | GND    | GND    | open   | open   | GND   |
| 2.45                            | GND   | GND    | GND    | open   | open   | GND   |
| 2.5                             | open  | open   | open   | GND    | open   | GND   |
| 2.55                            | GND   | open   | open   | GND    | open   | GND   |
| 2.6                             | open  | GND    | open   | GND    | open   | GND   |
| 2.65                            | GND   | GND    | open   | GND    | open   | GND   |
| 2.7                             | open  | open   | GND    | GND    | open   | GND   |
| 2.75                            | GND   | open   | GND    | GND    | open   | GND   |
| 2.8                             | open  | GND    | GND    | GND    | open   | GND   |
| 2.85                            | GND   | GND    | GND    | GND    | open   | GND   |
| 2.9                             | open  | open   | open   | open   | GND    | GND   |

**表 6-1. User Configurable Output Voltage Setting (续)**

| $V_{OUT(TARGET)}$<br>(V) | 50 mV | 100 mV | 200 mV | 400 mV | 800 mV | 1.6 V |
|--------------------------|-------|--------|--------|--------|--------|-------|
| 2.95                     | GND   | open   | open   | open   | GND    | GND   |
| 3                        | open  | GND    | open   | open   | GND    | GND   |
| 3.05                     | GND   | GND    | open   | open   | GND    | GND   |
| 3.1                      | open  | open   | GND    | open   | GND    | GND   |
| 3.15                     | GND   | open   | GND    | open   | GND    | GND   |
| 3.2                      | open  | GND    | GND    | open   | GND    | GND   |
| 3.25                     | GND   | GND    | GND    | open   | GND    | GND   |
| 3.3                      | open  | open   | open   | GND    | GND    | GND   |
| 3.35                     | GND   | open   | open   | GND    | GND    | GND   |
| 3.4                      | open  | GND    | open   | GND    | GND    | GND   |
| 3.45                     | GND   | GND    | open   | GND    | GND    | GND   |
| 3.5                      | open  | open   | GND    | GND    | GND    | GND   |

### 6.3.2 Traditional Adjustable Configuration

For any output voltage target that is not supported in the [User-Configurable Output Voltage](#) section, a traditional adjustable configuration with external-feedback resistors can be used with the TPS7A7300. 图 6-7 shows how to configure the TPS7A7300 as an adjustable regulator with an equation and 表 6-2 lists recommended pairs of feedback resistor values.

#### 备注

The bottom side of feedback resistor R2 in 图 6-7 must be in the range of 27 kΩ to 33 kΩ to maintain the specified regulation accuracy.

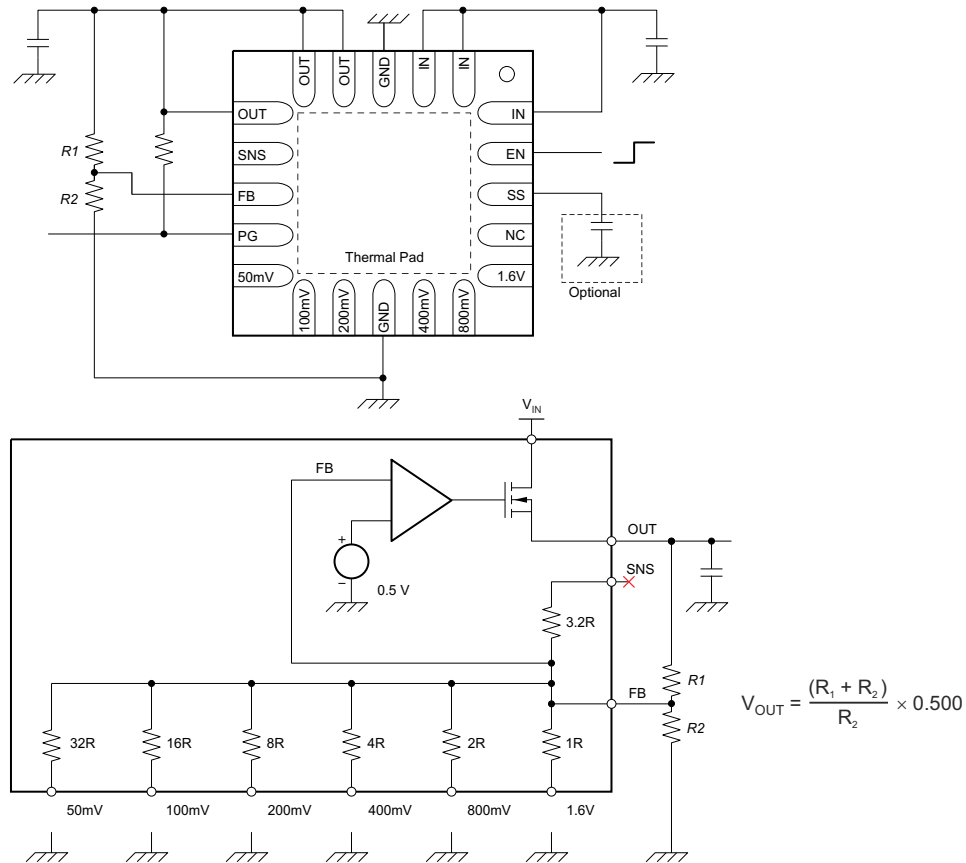


图 6-7. Traditional Adjustable Configuration With External Resistors

**表 6-2. Recommended Feedback-Resistor Values**

| $V_{OUT(TARGET)}$<br>(V) | E96 SERIES       |                  | R40 SERIES       |                  |
|--------------------------|------------------|------------------|------------------|------------------|
|                          | R1 (k $\Omega$ ) | R2 (k $\Omega$ ) | R1 (k $\Omega$ ) | R2 (k $\Omega$ ) |
| 1                        | 30.1             | 30.1             | 30               | 30               |
| 1.2                      | 39.2             | 28               | 43.7             | 31.5             |
| 1.5                      | 61.9             | 30.9             | 60               | 30               |
| 1.8                      | 80.6             | 30.9             | 80               | 30.7             |
| 1.9                      | 86.6             | 30.9             | 87.5             | 31.5             |
| 2.5                      | 115              | 28.7             | 112              | 28               |
| 3                        | 147              | 29.4             | 150              | 30               |
| 3.3                      | 165              | 29.4             | 175              | 31.5             |
| 5                        | 280              | 30.9             | 243              | 27.2             |

### 6.3.3 Undervoltage Lockout (UVLO)

The TPS7A7300 uses an undervoltage lockout circuit to keep the output shut off until the internal circuitry is operating properly. The UVLO circuit has a deglitch feature that typically ignores undershoot of the input voltage upon the event of device start-up. Still, a poor input line impedance can cause a severe input voltage drop when the device powers on. As explained in the [Input Capacitor Requirements](#) section, the input line impedance must be well-designed.

### 6.3.4 Soft-Start

The TPS7A7300 has an SS pin that provides a soft-start (slow start) function.

By leaving the SS pin open, the TPS7A7300 performs a soft-start by default.

As shown in the [Functional Block Diagram](#), by connecting a capacitor between the SS pin and ground, the  $C_{SS}$  capacitor forms an RC pair together with the integrated 50-k $\Omega$  resistor. The RC pair operates as an RC-delay circuit for the soft-start with the internal 700- $\mu$ s delay circuit.

The relationship between  $C_{SS}$  and the soft-start time is illustrated in the [Application Curves](#).

### 6.3.5 Current Limit

The TPS7A7300 internal current limit circuitry protects the regulator during fault conditions. During a current limit event, the output sources a fixed amount of current that is mostly independent of the output voltage. The current limit function is provided as a fail-safe mechanism and is not intended to be used regularly. Do **not** design any applications to use this current-limit function as a part of expected normal operation. Extended periods of current-limit operation degrade device reliability.

Powering on the device with the enable pin, or increasing the input voltage above the minimum operating voltage while a low-impedance short exists on the output of the device, can result in a sequence of high-current pulses from the input to the output of the device. The energy consumed by the device is minimal during these events; therefore, there is no failure risk. Additional input capacitance helps mitigate the load transient requirement of the upstream supply during these events.

### 6.3.6 Enable

The EN pin switches the enable and disable (shutdown) states of the TPS7A7300. A logic high input at the EN pin enables the device; a logic low input disables the device. When disabled, the device current consumption is reduced.

### 6.3.7 Power-Good

The TPS7A7300 has a power-good function that works with the PG output pin. When the output voltage undershoots the threshold voltage  $V_{IT(PG)}$  during normal operation, the PG open-drain output turns from a high-impedance state to a low-impedance state. When the output voltage exceeds the  $V_{IT(PG)}$  threshold by an amount

greater than the PG hysteresis,  $V_{\text{hys(PG)}}$ , the PG open-drain output turns from a low-impedance state to high-impedance state. By connecting a pullup resistor (usually between the OUT and PG pins), any downstream device can receive an active-high enable logic signal.

When setting the output voltage to less than 1.8 V and using a pullup resistor between OUT and PG pins, depending on the downstream device specifications, the downstream device can possibly be unable to accept the PG output as a valid high-level logic voltage. In such cases, place a pullup resistor between the IN and PG pins, not between the OUT and PG pins.

图 5-18 illustrates the open-drain output drive capability. The on-resistance of the open-drain transistor is calculated using 图 5-18, and is approximately  $200\ \Omega$ . Any pullup resistor greater than  $10\ \text{k}\Omega$  works fine for this purpose.

## 6.4 Device Functional Modes

### 6.4.1 Normal Operation

The device regulates to the nominal output voltage under the following conditions:

- The input voltage is at least as high as  $V_{IN(MIN)}$
- The input voltage is greater than the nominal output voltage added to the dropout voltage
- The enable voltage has previously exceeded the enable rising threshold voltage and has not decreased below the enable falling threshold
- The output current is less than the current limit
- The device junction temperature is less than the maximum specified junction temperature

### 6.4.2 Dropout Operation

If the input voltage is lower than the nominal output voltage plus the specified dropout voltage, but all other conditions are met for normal operation, the device operates in dropout mode. In this mode of operation, the output voltage is the same as the input voltage minus the dropout voltage. The transient performance of the device is significantly degraded because the pass device (such as a bipolar junction transistor, or BJT) is in saturation and no longer controls the current through the LDO. Line or load transients in dropout can result in large output voltage deviations.

### 6.4.3 Disabled

The device is disabled under the following conditions:

- The enable voltage is less than the enable falling threshold voltage or has not yet exceeded the enable rising threshold
- The device junction temperature is greater than the thermal shutdown temperature

表 6-3 lists the conditions that lead to the different modes of operation.

**表 6-3. Device Functional Mode Comparison**

| OPERATING MODE                                         | PARAMETER                                                      |                       |                       |                             |
|--------------------------------------------------------|----------------------------------------------------------------|-----------------------|-----------------------|-----------------------------|
|                                                        | $V_{IN}$                                                       | $V_{EN}$              | $I_{OUT}$             | $T_J$                       |
| Normal mode                                            | $V_{IN} > V_{OUT(NOM)} + V_{DO}$<br>and $V_{IN} > V_{IN(MIN)}$ | $V_{EN} > V_{IH(EN)}$ | $I_{OUT} < I_{(LIM)}$ | $T_J < 125^{\circ}\text{C}$ |
| Dropout mode                                           | $V_{IN} < V_{OUT(NOM)} + V_{DO}$                               | $V_{EN} > V_{IH(EN)}$ | —                     | $T_J < 125^{\circ}\text{C}$ |
| Disabled mode (any true condition disables the device) | —                                                              | $V_{EN} < V_{IL(EN)}$ | —                     | $T_J > 160^{\circ}\text{C}$ |

## 7 Application and Implementation

### 备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 7.1 Application Information

The TPS7A7300 is a very-low dropout LDO with very fast load transient response. The TPS7A7300 provides a number of features (such as a power-good signal for output monitoring and a soft-start pin to reduce inrush currents during start-up), and the device is designed for applications that require up to 3 A of output current.

### 7.2 Typical Application

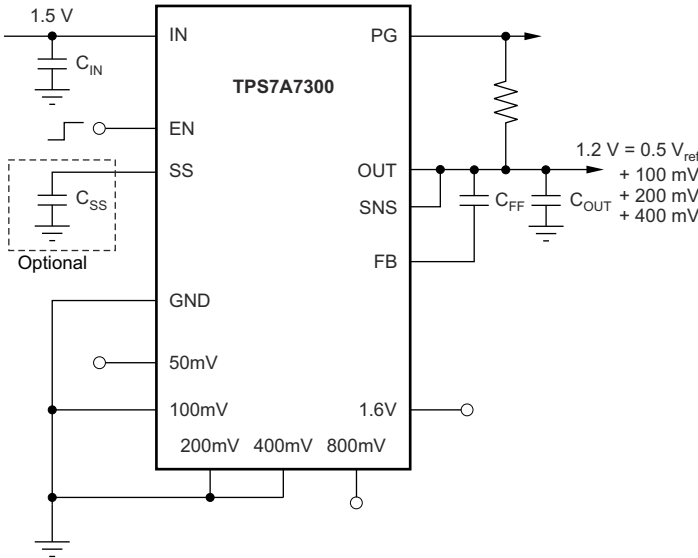


图 7-1. 1.2-V Output Using ANY-OUT Pins

#### 7.2.1 Design Requirements

表 7-1 lists the design parameters for this example.

表 7-1. Design Parameters

| DESIGN PARAMETER            | EXAMPLE VALUE              |
|-----------------------------|----------------------------|
| Input voltage range         | 1.425 V to 6.5 V           |
| Output voltage              | 1.2 V                      |
| Output current rating       | 3 A                        |
| Output capacitor range      | 4.7 $\mu$ F to 200 $\mu$ F |
| feedforward capacitor range | 220 pF to 100 nF           |
| Soft-start capacitor range  | 0 $\mu$ F to 1 $\mu$ F     |

#### 7.2.2 Detailed Design Procedure

##### 7.2.2.1 ANY-OUT Programmable Output Voltage

For ANY-OUT operation, the TPS7A7300 does not use any external resistors to set the output voltage, but uses device pins labeled 50 mV, 100 mV, 200 mV, 400 mV, 800 mV, and 1.6 V to set the regulated output voltage. Each pin is either connected to ground (active) or is left open (floating). The ANY-OUT programming is set as the sum of the internal reference voltage ( $V_{SS} = 0.5$  V) plus the sum of the respective voltages assigned to each

active pin. By leaving all ANY-OUT pins open, or floating, the output is set to the minimum possible output voltage equal to  $V_{(SS)}$ . By grounding all of the ANY-OUT pins, the output is set to 3.65 V.

When using the ANY-OUT pins, the SNS pin must always be connected between the OUT and FB pins. However, the feedforward capacitor must be connected to the FB pin, not the SNS pin.

#### **7.2.2.2 Traditional Adjustable Output Voltage**

For applications that need the regulated output voltage to be greater than 3.65 V (or those that require more resolution than the 50 mV that the ANY-OUT pins provide), the TPS7A7300 can also be use the traditional adjustable method of setting the regulated output.

When using the traditional method of setting the output, the FB pin must be connected to the node connecting the top and bottom resistors of the resistor divider. The SNS pin must be left floating.

#### **7.2.2.3 Input Capacitor Requirements**

As a result of the very fast transient response and low-dropout operation support, the line impedance must be reduced at the input pin of the TPS7A7300. The line impedance depends heavily on various factors, such as wire (PCB trace) resistance, wire inductance, and output impedance of the upstream voltage supply (power supply to the TPS7A7300). Therefore, a specific value for the input capacitance cannot be recommended until the previously listed factors are finalized.

In addition, simple usage of large input capacitance can form an unwanted LC resonance in combination with input wire inductance. For example, a 5-nH inductor and a 10- $\mu$ F input capacitor form an LC filter that has a resonance at 712 kHz. This value of 712 kHz is well inside the bandwidth of the TPS7A7300 control loop.

The best guideline is to use a capacitor of up to 1  $\mu$ F with well-designed wire connections (PCB layout) to the upstream supply. If optimizing the input line is difficult, use a large tantalum capacitor in combination with a good-quality, low-ESR, 1- $\mu$ F ceramic capacitor.

#### **7.2.2.4 Output Capacitor Requirements**

The TPS7A7300 is designed to be stable with standard ceramic capacitors with capacitance values from 4.7  $\mu$ F to 47  $\mu$ F without a feedforward capacitor. For output capacitors from 47  $\mu$ F to 200  $\mu$ F a feedforward capacitor of at least 220 pF must be used. The TPS7A7300 is evaluated using an X5R-type, 10- $\mu$ F ceramic capacitor. Use X5R- and X7R-type capacitors because they have minimal variation in value and ESR over temperature. Maximum ESR must be less than 1  $\Omega$ .

As with any regulator, increasing the size of the output capacitor reduces overshoot and undershoot magnitude, but increases duration of the transient response.

## 7.2.3 Application Curves

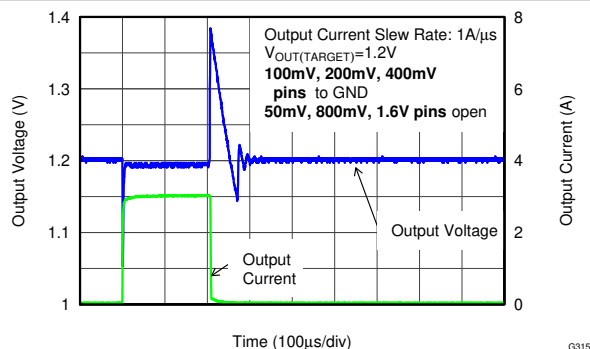


图 7-2. Load Transient Response ( $V_{OUT} = 1.2\text{ V}$ )

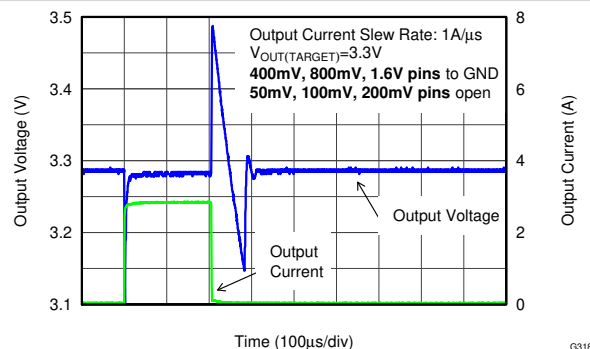


图 7-3. Load Transient Response ( $V_{OUT} = 3.3\text{ V}$ )

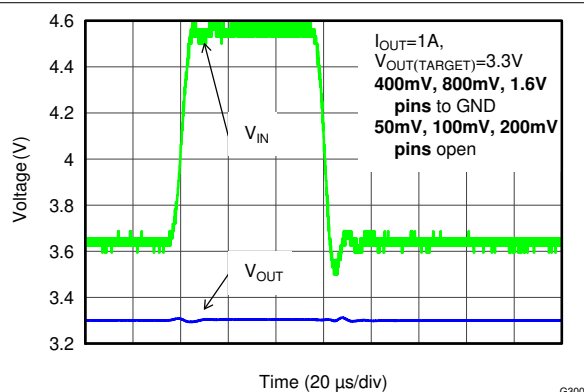


图 7-4. Line Transient Response

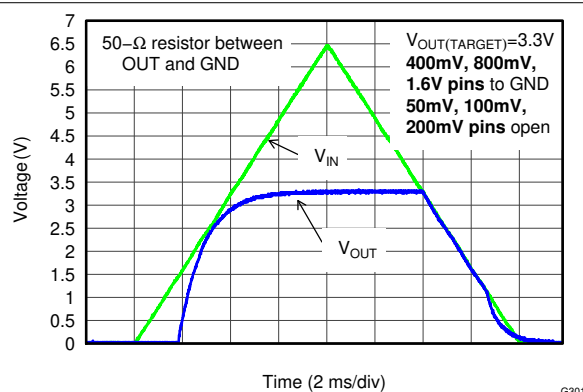


图 7-5. Power Up and Power Down ( $I_N = E_N$ )

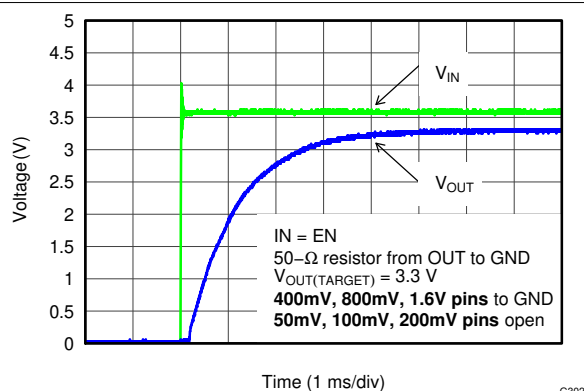


图 7-6. Turnon Response ( $I_N = E_N$ )

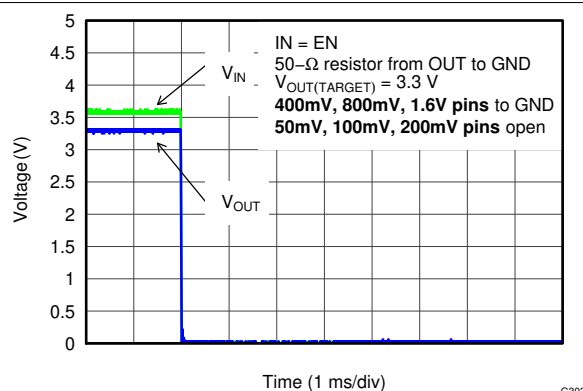


图 7-7. Turnoff Response ( $I_N = E_N$ )

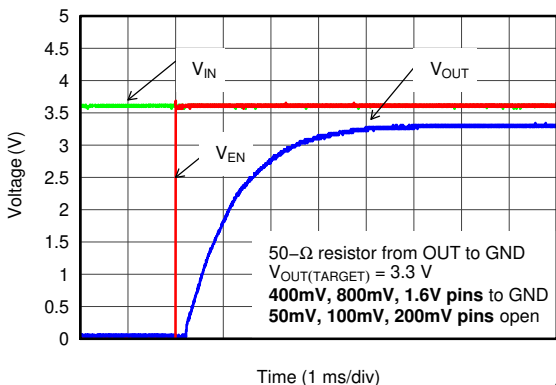


图 7-8. EN Pulse On Response (Over Stable  $V_{IN}$ )

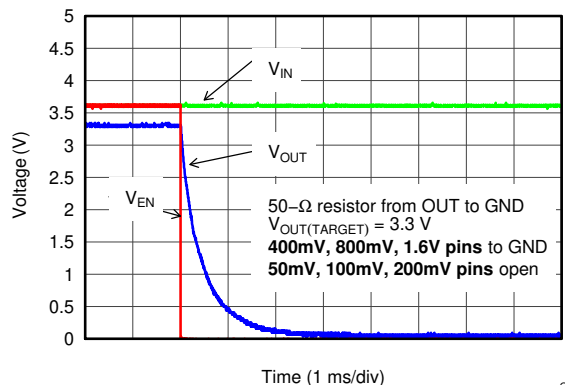


图 7-9. EN Pulse Off Response (Over Stable  $V_{IN}$ )

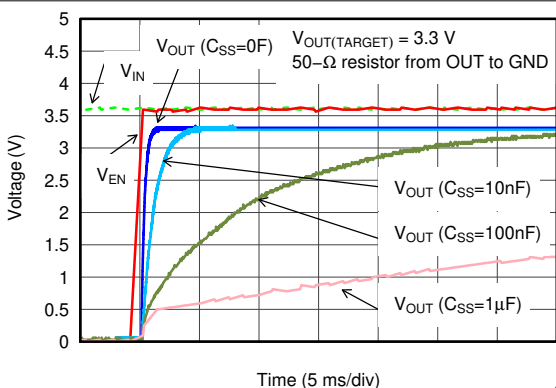


图 7-10. Soft-Start Delay vs  $C_{SS}$  (Enlarged View)

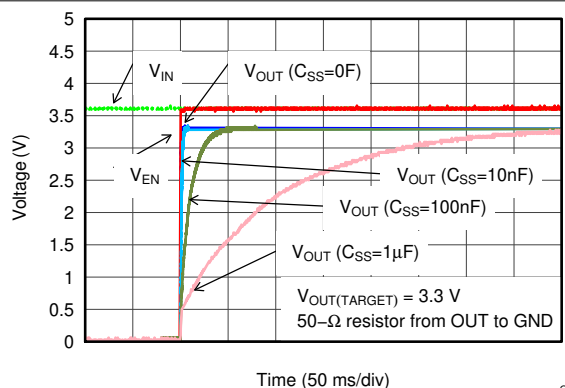


图 7-11. Soft-Start Delay vs  $C_{SS}$  (Reduced View)

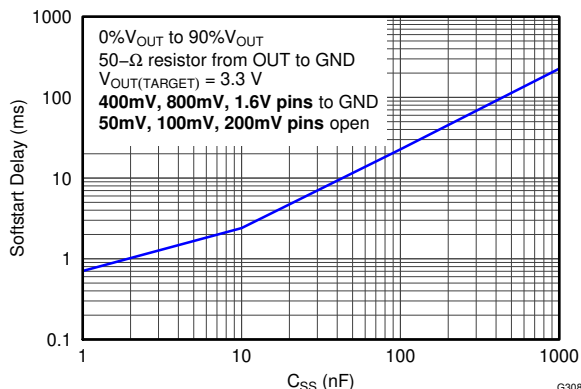


图 7-12. Soft-Start Delay vs  $C_{SS}$

## 7.3 Power Supply Recommendations

This device is designed for operation from an input voltage supply ranging from 1.425 V to 6.5 V. This input supply must be well regulated. The TPS7A7300 fast-transient, low-dropout linear regulator achieves stability with a minimum output capacitance of 4.7  $\mu$ F; however, use 10-  $\mu$ F ceramic capacitors for both the input and output to maximize AC performance.

## 7.4 Layout

### 7.4.1 Layout Guidelines

- To improve AC performance (such as PSRR, output noise, and transient response), design the board with separate ground planes for IN and OUT, with each ground plane connected only at the GND pin of the device.
- In addition, the ground connection for the output capacitor must connect directly to the GND pin of the device.
- Equivalent series inductance (ESL) and ESR must be minimized to maximize performance and ensure stability.
- Every capacitor must be placed as close as possible to the device and on the same side of the PCB as the regulator.
- Do **not** place any of the capacitors on the opposite side of the PCB from where the regulator is installed.
- The use of vias and long traces is strongly discouraged because these components can impact system performance negatively and even cause instability.
- If possible, and to provide the maximum performance denoted in this product data sheet, use the same layout pattern used for the TPS7A7300 evaluation board, see the [TPS7A7x00EVM-718 Evaluation Module user guide](#).

#### 7.4.1.1 Thermal Considerations

The thermal protection feature disables the output when the junction temperature rises to approximately 160°C, allowing the device to cool. When the junction temperature cools to approximately 140°C, the output circuitry is enabled. Depending on power dissipation, thermal resistance, and ambient temperature, the thermal-protection circuit can cycle on and off. This thermal limit protects the device from damage as a result of overheating.

Any tendency to activate the thermal protection circuit indicates excessive power dissipation or an inadequate heat sink. For reliable operation, junction temperature must be limited to 125°C maximum. To estimate the margin of safety in a complete design (including heat sink), increase the ambient temperature until the thermal protection is triggered; use worst-case loads and signal conditions. For good reliability, thermal protection must trigger at least 35°C above the maximum expected ambient condition of your particular application. This configuration produces a worst-case junction temperature of 125°C at the highest-expected ambient temperature and worst-case load.

The internal-protection circuitry of the TPS7A7300 is designed to protect against overload conditions. This circuitry is not intended to replace proper heat sinking. Continuously running the TPS7A7300 into thermal shutdown degrades device reliability.

#### 7.4.1.2 Power Dissipation

Knowing the device power dissipation and proper sizing of the thermal plane that is connected to the tab or pad is critical to avoiding thermal shutdown and providing reliable operation.

Power dissipation of the device depends on input voltage and load conditions and can be calculated using [方程式 1](#):


$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} \quad (1)$$

Power dissipation can be minimized and greater efficiency can be achieved by using the lowest possible input voltage necessary to achieve the required output voltage regulation.

On the VQFN (RGW) package, the primary conduction path for heat is through the exposed pad to the PCB. The pad can be connected to ground or be left floating; however, the pad must be attached to an appropriate amount of copper PCB area to make sure the device does not overheat. The maximum junction-to-ambient thermal resistance depends on the maximum ambient temperature, maximum device junction temperature, and power dissipation of the device and can be calculated using [方程式 2](#):

$$R_{\theta JA} = \left( \frac{+125^{\circ}\text{C} - T_A}{P_D} \right) \quad (2)$$

Knowing the maximum  $R_{\theta JA}$ , the minimum amount of PCB copper area needed for appropriate heat sinking can be estimated using 图 7-13.

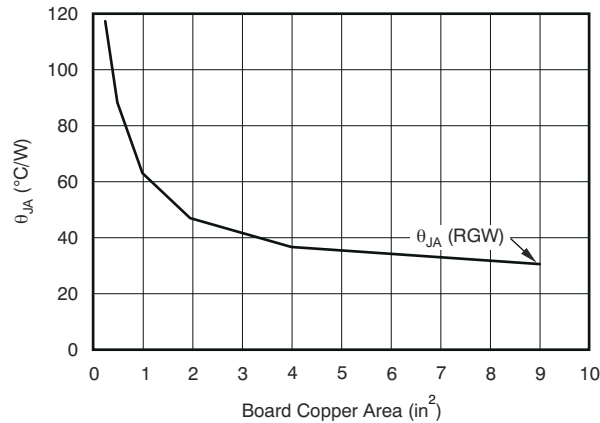

The  $R_{\theta JA}$  value at a board size of 9-in<sup>2</sup> (that is, 3-in × 3-in) is a JEDEC standard.

图 7-13.  $R_{\theta JA}$  vs Board Size

图 7-13 shows the variation of  $R_{\theta JA}$  as a function of ground plane copper area in the board. This figure is intended only as a guideline to demonstrate the effects of heat spreading in the ground plane and must not be used to estimate actual thermal performance in real application environments.

#### 备注

When the device is mounted on an application PCB,  $\Psi_{JT}$  and  $\Psi_{JB}$  must be used as explained in the [Estimating Junction Temperature](#) section.

#### 7.4.1.3 Estimating Junction Temperature

Using the thermal metrics  $\Psi_{JT}$  and  $\Psi_{JB}$ , as listed in the *Thermal Information* table, the junction temperature can be estimated with corresponding formulas (given in 方程式 3). For backwards compatibility, an older  $\theta_{JC, Top}$  parameter is listed as well.

$$\begin{aligned} \Psi_{JT}: T_J &= T_T + \Psi_{JT} \cdot P_D \\ \Psi_{JB}: T_J &= T_B + \Psi_{JB} \cdot P_D \end{aligned} \quad (3)$$


where:

- $P_D$  is the power dissipation shown by 方程式 2
- $T_T$  is the temperature at the center-top of the device package
- $T_B$  is the PCB temperature measured 1 mm away from the device package on the PCB surface (see 图 7-14)

#### 备注

Both  $T_T$  and  $T_B$  can be measured on actual application boards using a thermo-gun (an infrared thermometer).


For more information about measuring  $T_T$  and  $T_B$ , see the [Using New Thermal Metrics application note](#).

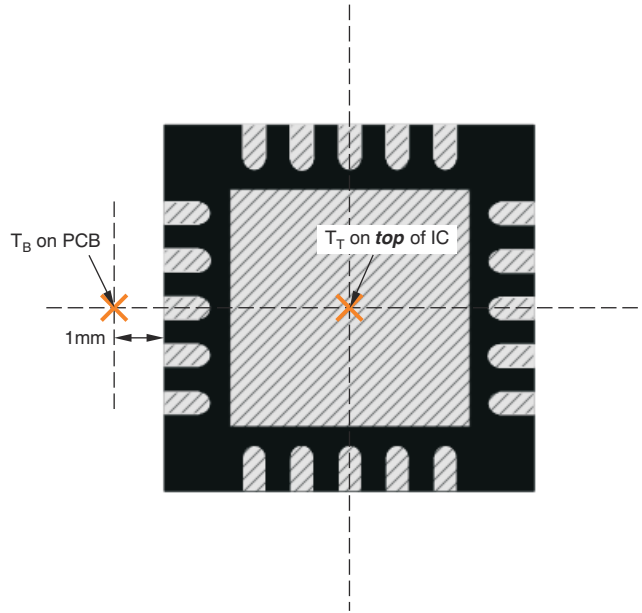

(a) Example RGW (QFN) Package Measurement


**图 7-14. Measuring Points For  $T_T$  and  $T_B$** 

From 图 7-15, the new thermal metrics ( $\Psi_{JT}$  and  $\Psi_{JB}$ ) are shown to have very little dependency on board size. That is, using  $\Psi_{JT}$  or  $\Psi_{JB}$  with 方程式 3 is a good way to estimate  $T_J$  by simply measuring  $T_T$  or  $T_B$ , regardless of the application board size.

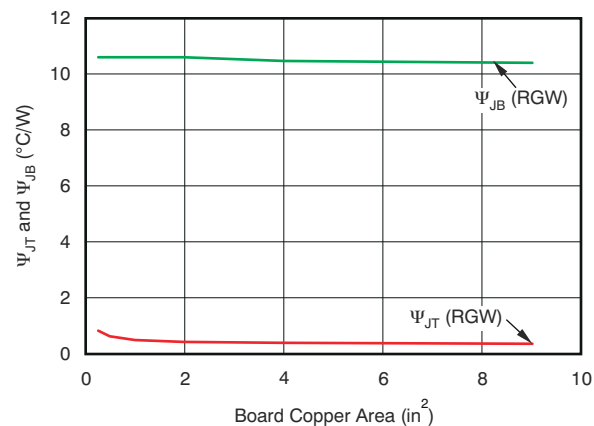**图 7-15.  $\Psi_{JT}$  And  $\Psi_{JB}$  vs Board Size**

For a more detailed discussion of why TI does not recommend using  $\theta_{JC(top)}$  to determine thermal characteristics, see the [Using New Thermal Metrics application note](#). For further information, see the [Semiconductor and IC Package Thermal Metrics application note](#).

## 7.4.2 Layout Example

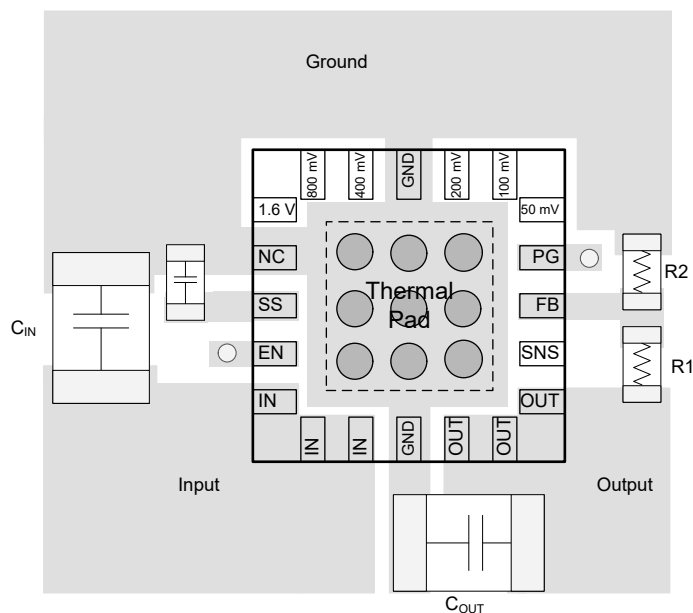

Notes: C<sub>in</sub> and C<sub>out</sub> are 0805 packages  
 C<sub>SS</sub>, R<sub>1</sub>, and R<sub>2</sub> are 0402 packages  
 R<sub>1</sub> and R<sub>2</sub> only needed for adjustable operation  
 ○ Denotes a via to a connection made on another layer

**图 7-16. TPS7A7300 Recommended Layout**

## 8 Device And Documentation Support

### 8.1 Documentation Support

#### 8.1.1 Related Documentation

For related documentation see the following:

- Texas Instruments, [Pros and Cons of Using a Feedforward Capacitor with a Low-Dropout Regulator application note](#)
- Texas Instruments, [Using New Thermal Metrics application note](#)
- Texas Instruments, [TPS7A7x00EVM-718 Evaluation Module user guide](#)
- Texas Instruments, [Semiconductor and IC Package Thermal Metrics application note](#)

### 8.2 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](https://ti.com) 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 8.3 支持资源

[TI E2E™ 中文支持论坛](#) 是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

### 8.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 8.5 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 8.6 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

## 9 Revision History

注：以前版本的页码可能与当前版本的页码不同

### Changes from October 4, 2023 to October 30, 2023 (from Revision E (December 2015) to Revision F (October 2023))

|                                                                                             | Page |
|---------------------------------------------------------------------------------------------|------|
| • 添加了指向 <i>应用</i> 部分的链接.....                                                                | 1    |
| • Changed name of section from <i>Enable and Shutdown the Device</i> to <i>Enable</i> ..... | 21   |
| • Changed SS and EN position in <i>Layout Example</i> to match device pinout.....           | 31   |

### Changes from Revision D (January 2013) to Revision E (December 2015)

|                                                                                         | Page |
|-----------------------------------------------------------------------------------------|------|
| • 添加了 <i>ESD</i> 等级表、特性说明部分、器件功能模式、应用和实施部分、电源相关建议部分、布局部分、器件和文档支持部分以及机械、封装和可订购信息部分 ..... | 1    |

## 10 Mechanical, Packaging, And Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TPS7A7300RGWR    | ACTIVE        | VQFN         | RGW                | 20   | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | SBR                     | <a href="#">Samples</a> |
| TPS7A7300RGWT    | ACTIVE        | VQFN         | RGW                | 20   | 250            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | SBR                     | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.




## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS7A7300RGWR | VQFN         | RGW             | 20   | 3000 | 330.0              | 12.4               | 5.3     | 5.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TPS7A7300RGWT | VQFN         | RGW             | 20   | 250  | 180.0              | 12.4               | 5.3     | 5.3     | 1.1     | 8.0     | 12.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS

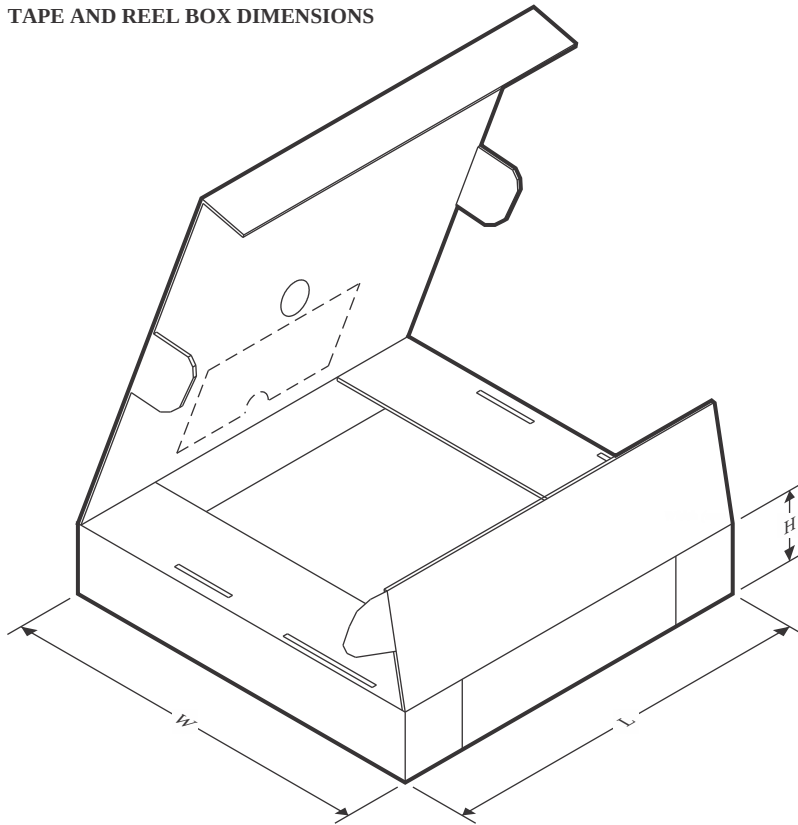

\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS7A7300RGWR | VQFN         | RGW             | 20   | 3000 | 346.0       | 346.0      | 33.0        |
| TPS7A7300RGWT | VQFN         | RGW             | 20   | 250  | 210.0       | 185.0      | 35.0        |

## GENERIC PACKAGE VIEW


**RGW 20**

**VQFN - 1 mm max height**


5 x 5, 0.65 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

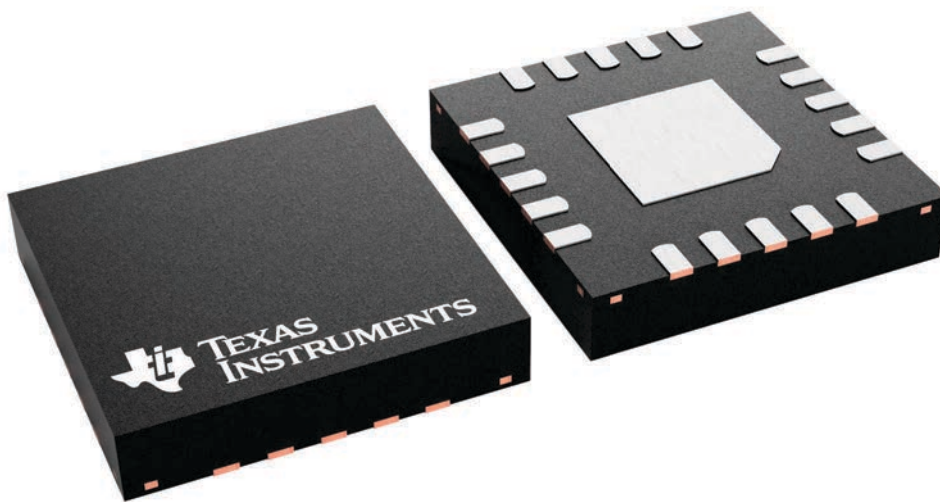

4227157/A

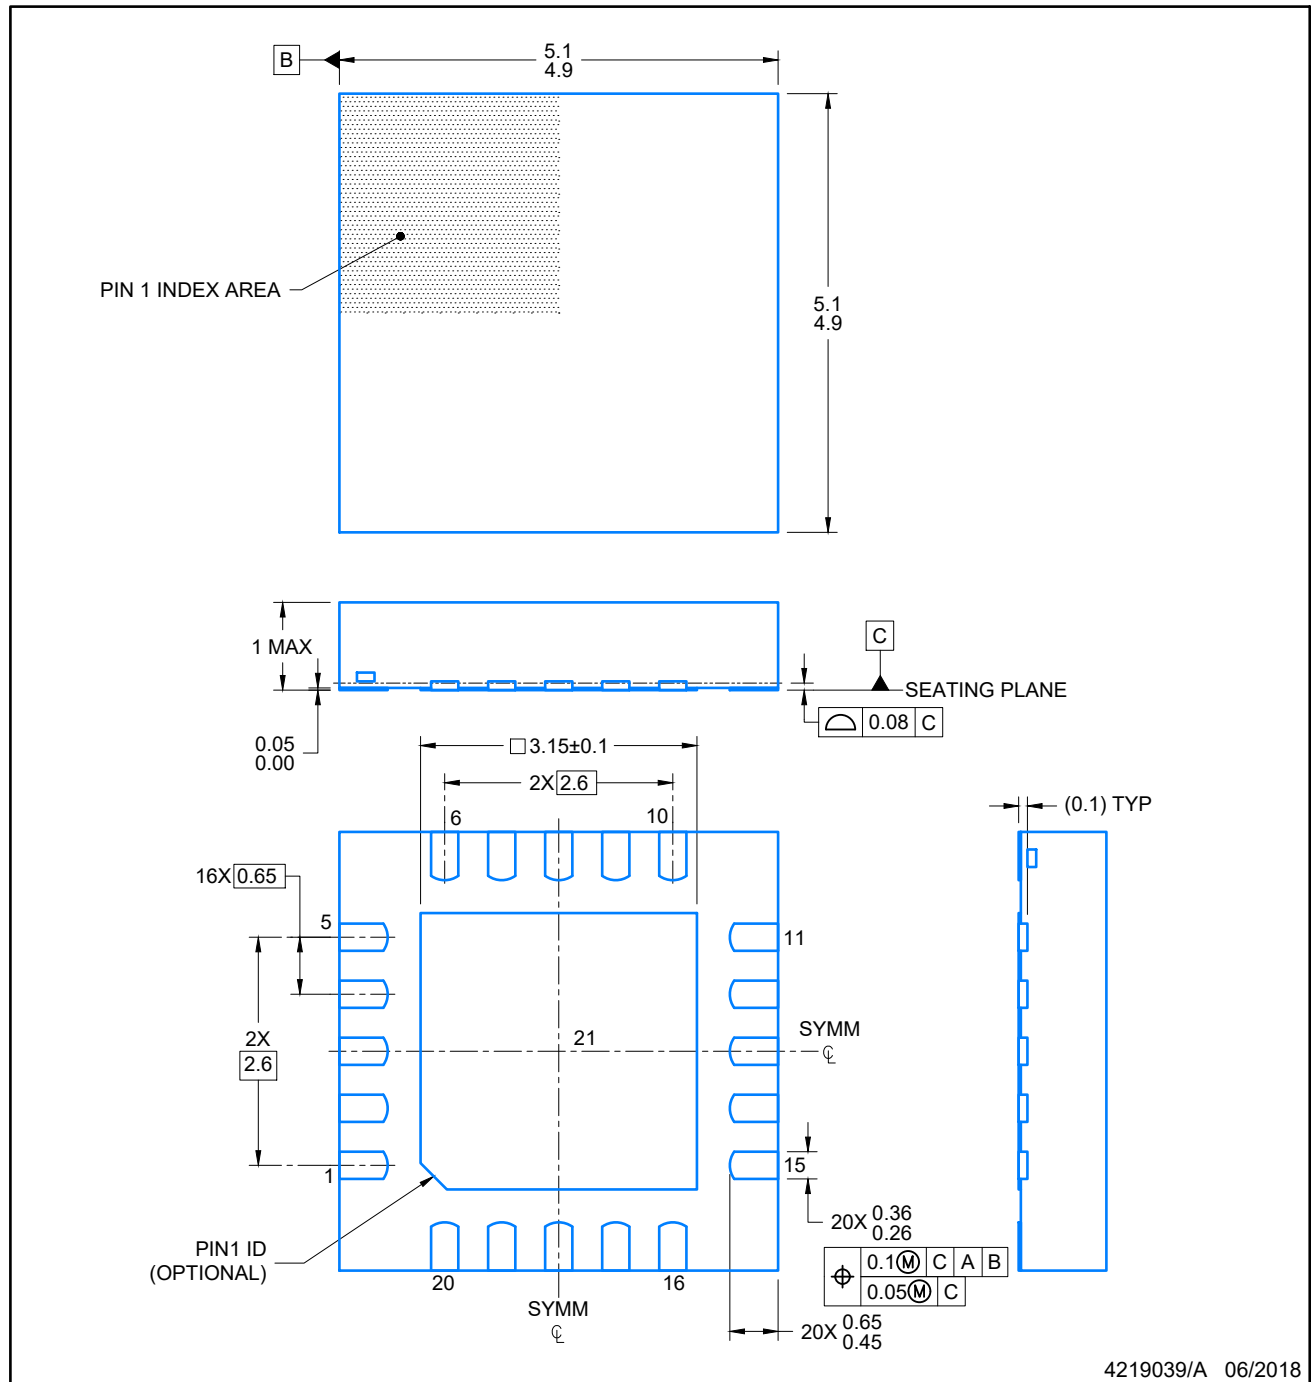

4219039/A 06/2018


## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

### VQFN - 1 mm max height


[illegible]

SCALE: 15X

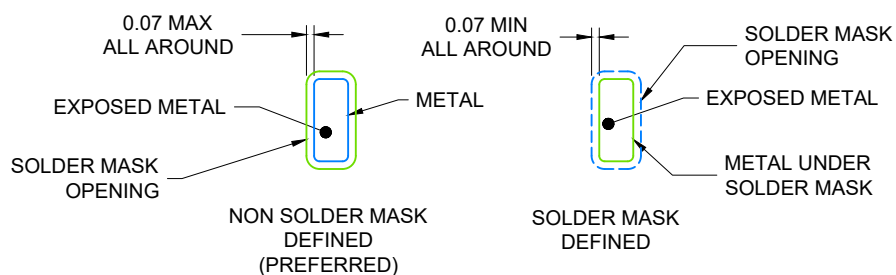

4219039/A 06/2018

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sl原因271](http://www.ti.com/lit/sl原因271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

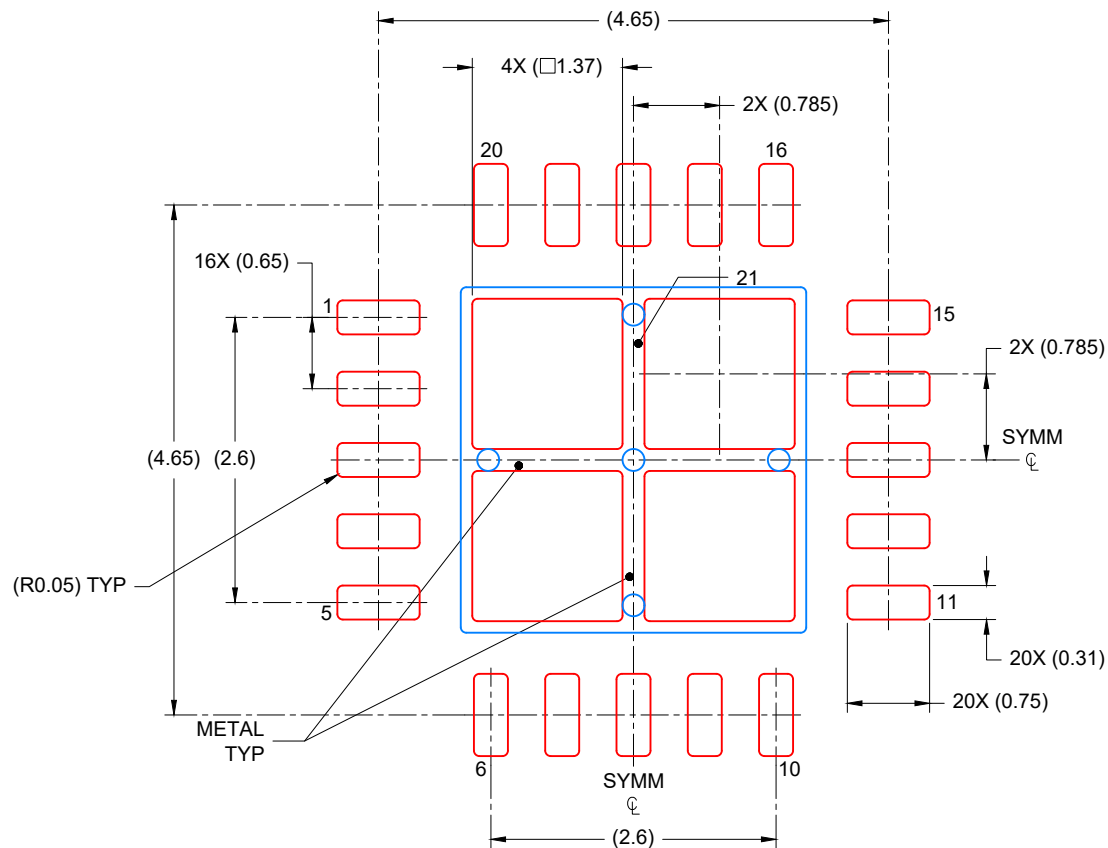

**SOLDER PASTE EXAMPLE**  
 BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD  
 75% PRINTED COVERAGE BY AREA  
 SCALE: 15X

4219039/A 06/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要声明和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2024，德州仪器 (TI) 公司