



P1

P2

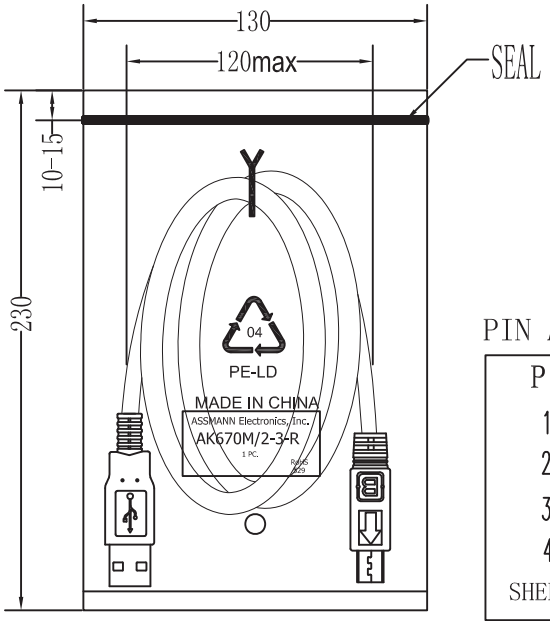

1PC/PE BAG

PIN ASSIGNMENT:

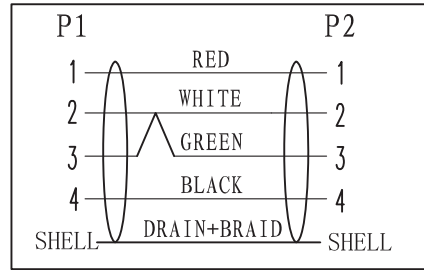

Material:

- Cable: USB2.0 Black UL2725 #28/1P+28#/2C+AEB
 - OD 3.8MM
 - White print
 - USB Cable E189529 AWM 2725 VW-1 30V 80°C 28AWG/1PR and 28AWG/2C
 - P1 Connector: Mini USB 4P B/M plug
 - Solder type
 - Plastic Black
 - P2 Connector: USB A Male
 - Shell: Nickel
 - Pin: G/F 4PCS type
 - Insulator color: White
 - Outer Jacket: Black PVC-40P
- Electrical:**
- 100% short, open, miswire test
 - Conduct resistance: 2Ω (Max.)
 - Insulation resistance: 10MΩ (Min.)
 - Dielectric test: 300V DC

Unit: MM



Scale	1:1							Name	Item No.	
TOLERANCE						Drawn	08.29.11	Chappell	AK670M/2-5-R	
X.X	±0.40					Approved			Title	
X.XX	±0.25								USB 2.0 Cable A Male to Mini B Male - 4 Pin, Black, 5 Meters	
X.XXX	±0.15								Drawing No.	
Angle	±3°								rev00	
									Replace	Sheet
Modification				Date	Name					

