


Three Phase AC Controller Modules

PSUT 130
PSUH 130


$I_{RMS} = 3 \times 120 \text{ A}$
 $V_{RRM} = 800-1800 \text{ V}$

Preliminary Data Sheet

V_{RSM} V_{DSM} (V)	V_{RRM} V_{DRM} (V)	Type
900	800	PSUT 130/08 PSUH 130/08
1300	1200	PSUT 130/12 PSUH 130/12
1500	1400	PSUT 130/14 PSUH 130/14
1700	1600	PSUT 130/16 PSUH 130/16
1900	1800	PSUT 130/18 PSUH 130/18

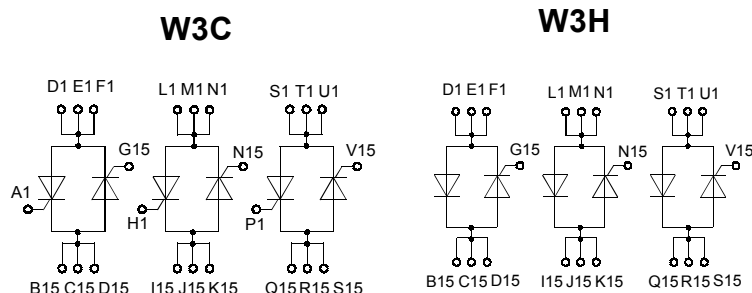

Symbol	Test Conditions	Maximum Ratings
I_{RMS}	$T_C = 85^\circ\text{C}; 50-400 \text{ Hz (per phase)}$	120 A
I_{TRMS}		88 A
I_{TAVM}	$T_C = 85^\circ\text{C}; 180^\circ \text{ sine}$	55 A
I_{TSM}	$T_{VJ} = 45^\circ\text{C} \quad t = 10 \text{ ms (50 Hz), sine}$	1300 A
	$V_R = 0 \quad t = 8.3 \text{ ms (60 Hz), sine}$	1400 A
	$T_{VJ} = 125^\circ\text{C} \quad t = 10 \text{ ms (50 Hz), sine}$	1150 A
	$V_R = 0 \quad t = 8.3 \text{ ms (60 Hz), sine}$	1300 A
$\int i^2 dt$	$T_{VJ} = 45^\circ\text{C} \quad t = 10 \text{ ms (50 Hz), sine}$	8450 A ² s
	$V_R = 0 \quad t = 8.3 \text{ ms (60 Hz), sine}$	8100 A ² s
	$T_{VJ} = 125^\circ\text{C} \quad t = 10 \text{ ms (50 Hz), sine}$	6600 A ² s
	$V_R = 0 \quad t = 8.3 \text{ ms (60 Hz), sine}$	7000 A ² s
$(di/dt)_{cr}$	$T_{VJ} = 125^\circ\text{C} \quad \text{repetitive, } I_T = 80 \text{ A}$	150 A/ μs
	$f=50\text{Hz}, t_p=200\mu\text{s}$	
	$V_D=2/3V_{DRM}$	
	$I_G=0.45 \text{ A non repetitive, } I_T = I_{TAVM}$	500 A/ μs
$(dv/dt)_{cr}$	$di_G/dt=0.45\text{A}/\mu\text{s}$	
P_{GM}	$T_{VJ} = 125^\circ\text{C} \quad V_D=2/3V_{DRM}$	1000 V/ μs
	$R_{GK} = \infty, \text{ method 1 (linear voltage rise)}$	
P_{GAVM}	$T_{VJ} = 125^\circ\text{C} \quad t_p=30\mu\text{s}$	$\leq 10 \text{ W}$
	$I_T=I_{TAVM} \quad t_p=300\mu\text{s}$	$\leq 5 \text{ W}$
V_{RGM}		0.5 W
T_{VJ}		10 V
T_{VJM}		-40... + 125 °C
T_{stg}		125 °C
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$	-40... + 125 °C
	$I_{ISOL} \leq 1 \text{ mA} \quad t = 1 \text{ s}$	2500 V~
M_d		3000 V~
	Mounting torque (M5)	3 Nm
Weight		26 lb.in.
	typ.	86 g

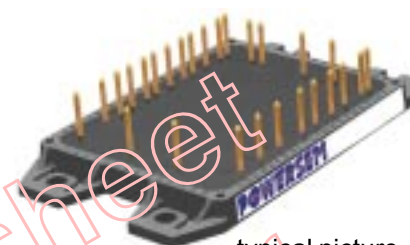

typical picture, for pin configuration see outline drawing

Features

- Thyristor controller for AC (circuit W3C acc. to IEC) for mains frequency □
- Isolation voltage 3000 V~
- Planar glass passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering
- UL Release applied

Applications

- Switching and control of three phase AC circuits
- Light and temperature control
- Softstart AC motor controller
- Solid state switches

Advantages

- Easy to mount with four screws
- Space and weight savings
- Improved temperature and power cycling capability
- High power density
- Small and light weight


Data according to IEC 60747 refer to a single thyristor unless otherwise stated

Symbol	Test Conditions	Characteristic Value
$I_{D,R}$	$T_{VJ} = 125^{\circ}\text{C}$, $V_R = V_{RRM}$, $V_D = V_{DRM}$	≤ 5 mA
V_T	$I_T = 200$ A, $T_{VJ} = 25^{\circ}\text{C}$	≤ 1.57 V
V_{TO}	For power-loss calculations only	0.8 V
r_T		3.9 m Ω
V_{GT}	$V_D = 6\text{V}$, $T_{VJ} = 25^{\circ}\text{C}$	≤ 1.5 V
	$T_{VJ} = -40^{\circ}\text{C}$	≤ 1.6 V
I_{GT}	$V_D = 6\text{V}$, $T_{VJ} = 25^{\circ}\text{C}$	≤ 100 mA
	$T_{VJ} = -40^{\circ}\text{C}$	≤ 200 mA
V_{GD}	$T_{VJ} = 125^{\circ}\text{C}$, $V_D = 2/3 V_{DRM}$	≤ 0.2 V
I_{GD}	$T_{VJ} = 125^{\circ}\text{C}$, $V_D = 2/3 V_{DRM}$	≤ 10 mA
I_L	$T_{VJ} = 25^{\circ}\text{C}$, $t_p = 10\mu\text{s}$	≤ 450 mA
	$I_G = 0.45\text{A}$, $di_G/dt = 0.45\text{A}/\mu\text{s}$	
I_H	$T_{VJ} = 25^{\circ}\text{C}$, $V_D = 6\text{V}$, $R_{GK} = \infty$	≤ 200 mA
t_{gd}	$T_{VJ} = 25^{\circ}\text{C}$, $V_D = 1/2 V_{DRM}$	≤ 2 μs
	$I_G = 0.45\text{A}$, $di_G/dt = 0.45\text{A}/\mu\text{s}$	
R_{thJC}	per thyristor; DC	0.55 K/W
	per module	0.092 K/W
R_{thJH}	per thyristor; sine 180° el	0.7 K/W
	per module	0.117 K/W
d_s	Creeping distance on surface (Pin to heatsink)	min. 11.2 mm
d_A	Strike distance in air (Pin to heatsink)	min. 11.2 mm
a	Max. allowable acceleration	50 m/s ²

Package style and outline

Dimensions in mm (1mm = 0.0394")

W3C

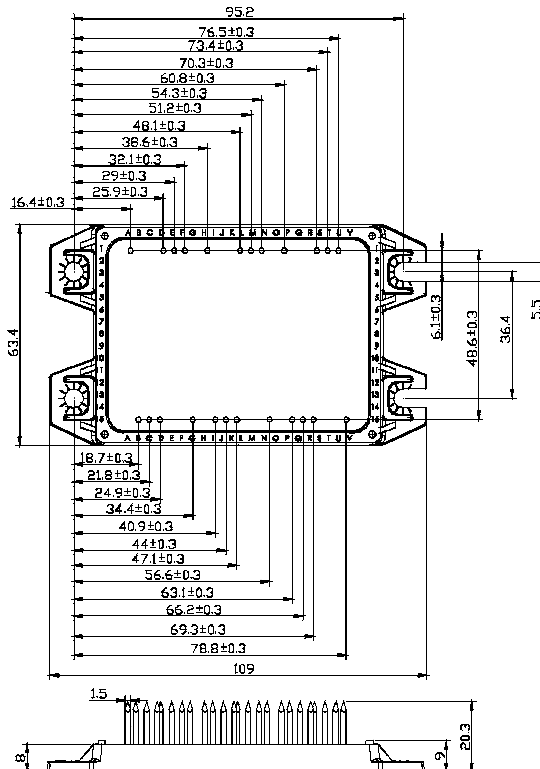

W3H

