








THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		2007
©	COPYRIGHT 2007	BY -	ALL RIGHTS RESERVED.	

LOC		DIST		REVISIONS						
GP	00	P	LTR	DESCRIPTION	DATE	OWN	APVD			
			C I	REVISED PER ECO-11-004835	11MAR2011	RK	HMR			
			D	REVISED PER ECO-12-005533	31MAR2012	JY	AC			
			E	REVISED PER ECO-13-009872	26NOV2013	RG	MC			
			F	REVISED PER ECO-14-016878	30EC2014	RG	MC			

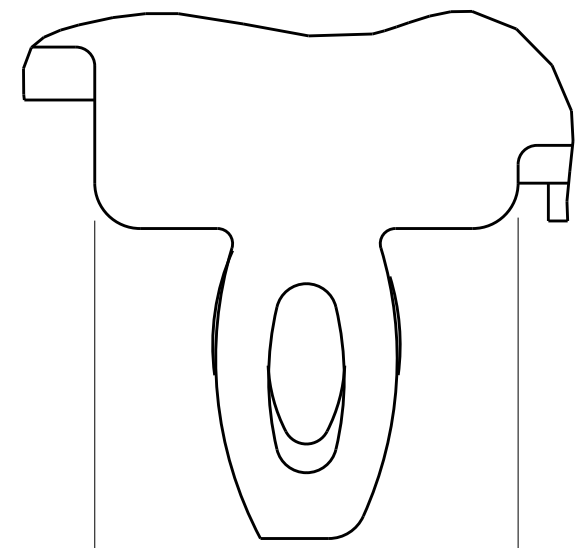

DETAIL S 
SCALE 20:1


- ① CAGE ASSEMBLY MATERIAL: NICKEL SILVER, 0.25 THICK
HEAT SINK MATERIAL: ALUMINUM
HEAT SINK CLIP MATERIAL: STAINLESS STEEL
EMI SPRINGS MATERIAL: COPPER ALLOY
FRONT FLANGE MATERIAL: ZINC ALLOY
LIGHT PIPE MATERIAL: CLEAR POLYCARBONATE
- ② PITCH BETWEEN PORTS OF ONE 1X3 CAGE ASSEMBLY.
- ③ SPACING BETWEEN CAGES ON THE SAME PC BOARD, TO BE SPECIFIED BY CUSTOMER, MUST COMPLY WITH MINIMUM DIMENSIONS SHOWN.
- ④ REFERENCE APPLICATION SPEC 114-13218 FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- ⑤ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- ⑥ DIMENSION F IS THE NOMINAL THICKNESS OF CUSTOMER SUPPLIED PC BOARD,
SINGLE SIDED PC BOARD MINIMUM THICKNESS = 1.45mm
DOUBLE SIDED PC BOARD MINIMUM THICKNESS = 2.2mm PER QSFP
- ⑦ HEAT SINKS, LIGHT PIPES, AND HEAT SINK CLIPS SHIPPED ASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED.
- ⑧ DATUM -A- IS TOP SURFACE OF PC BOARD.
- ⑨ DIMENSION APPLIES WITH MODULE INSERTED IN CAGE.
- ⑩ UNPLATED THRU HOLE.
11. MATES WITH QSFP MSA COMPATIBLE TRANSCEIVER.
- ⑪ SURFACE TRACES PERMITTED WITHIN THIS AREA EXCEPT WHERE CAGE STANDOFFS, SHOWN IN DETAIL S, CONTACT PC BOARD.
- ⑫ BASELINE FOR THESE DIMENSIONS IS THE CENTER OF COMPLIANT PIN HOLE.
- ⑬ 2D BARCODE AND DATE CODE (YYWWDD) MARKED ON SIDE OF CAGE ASSEMBLY.

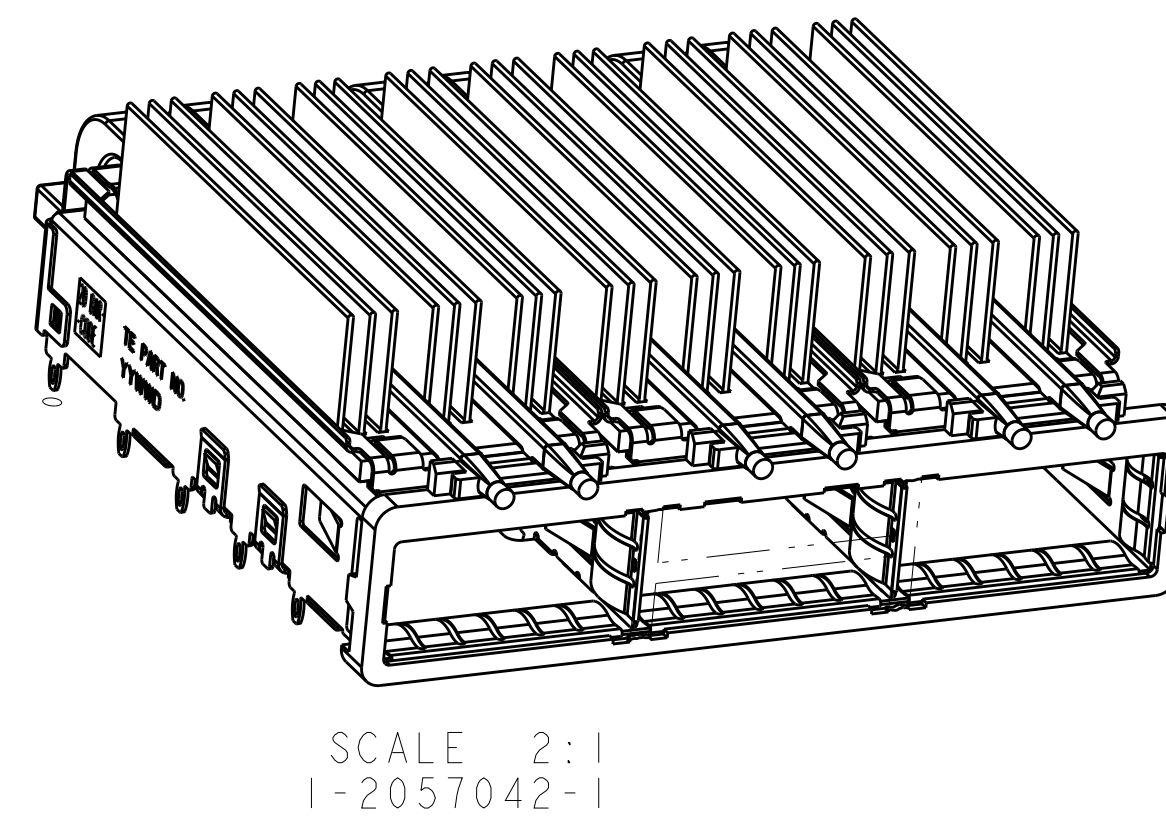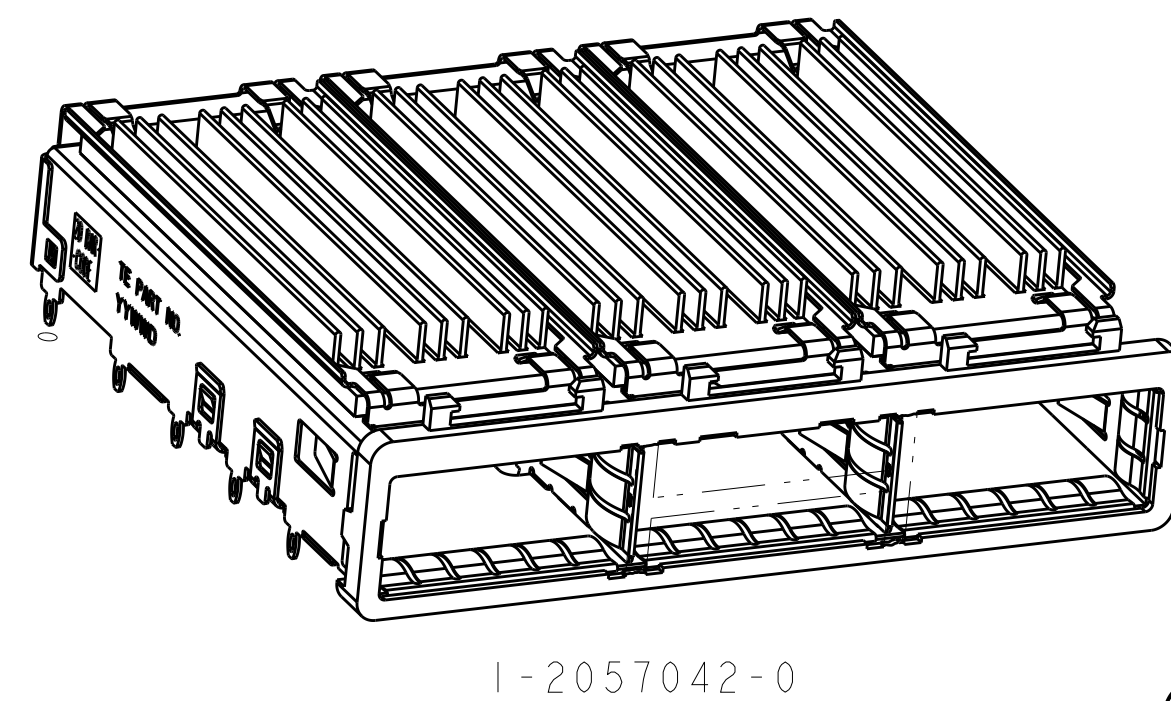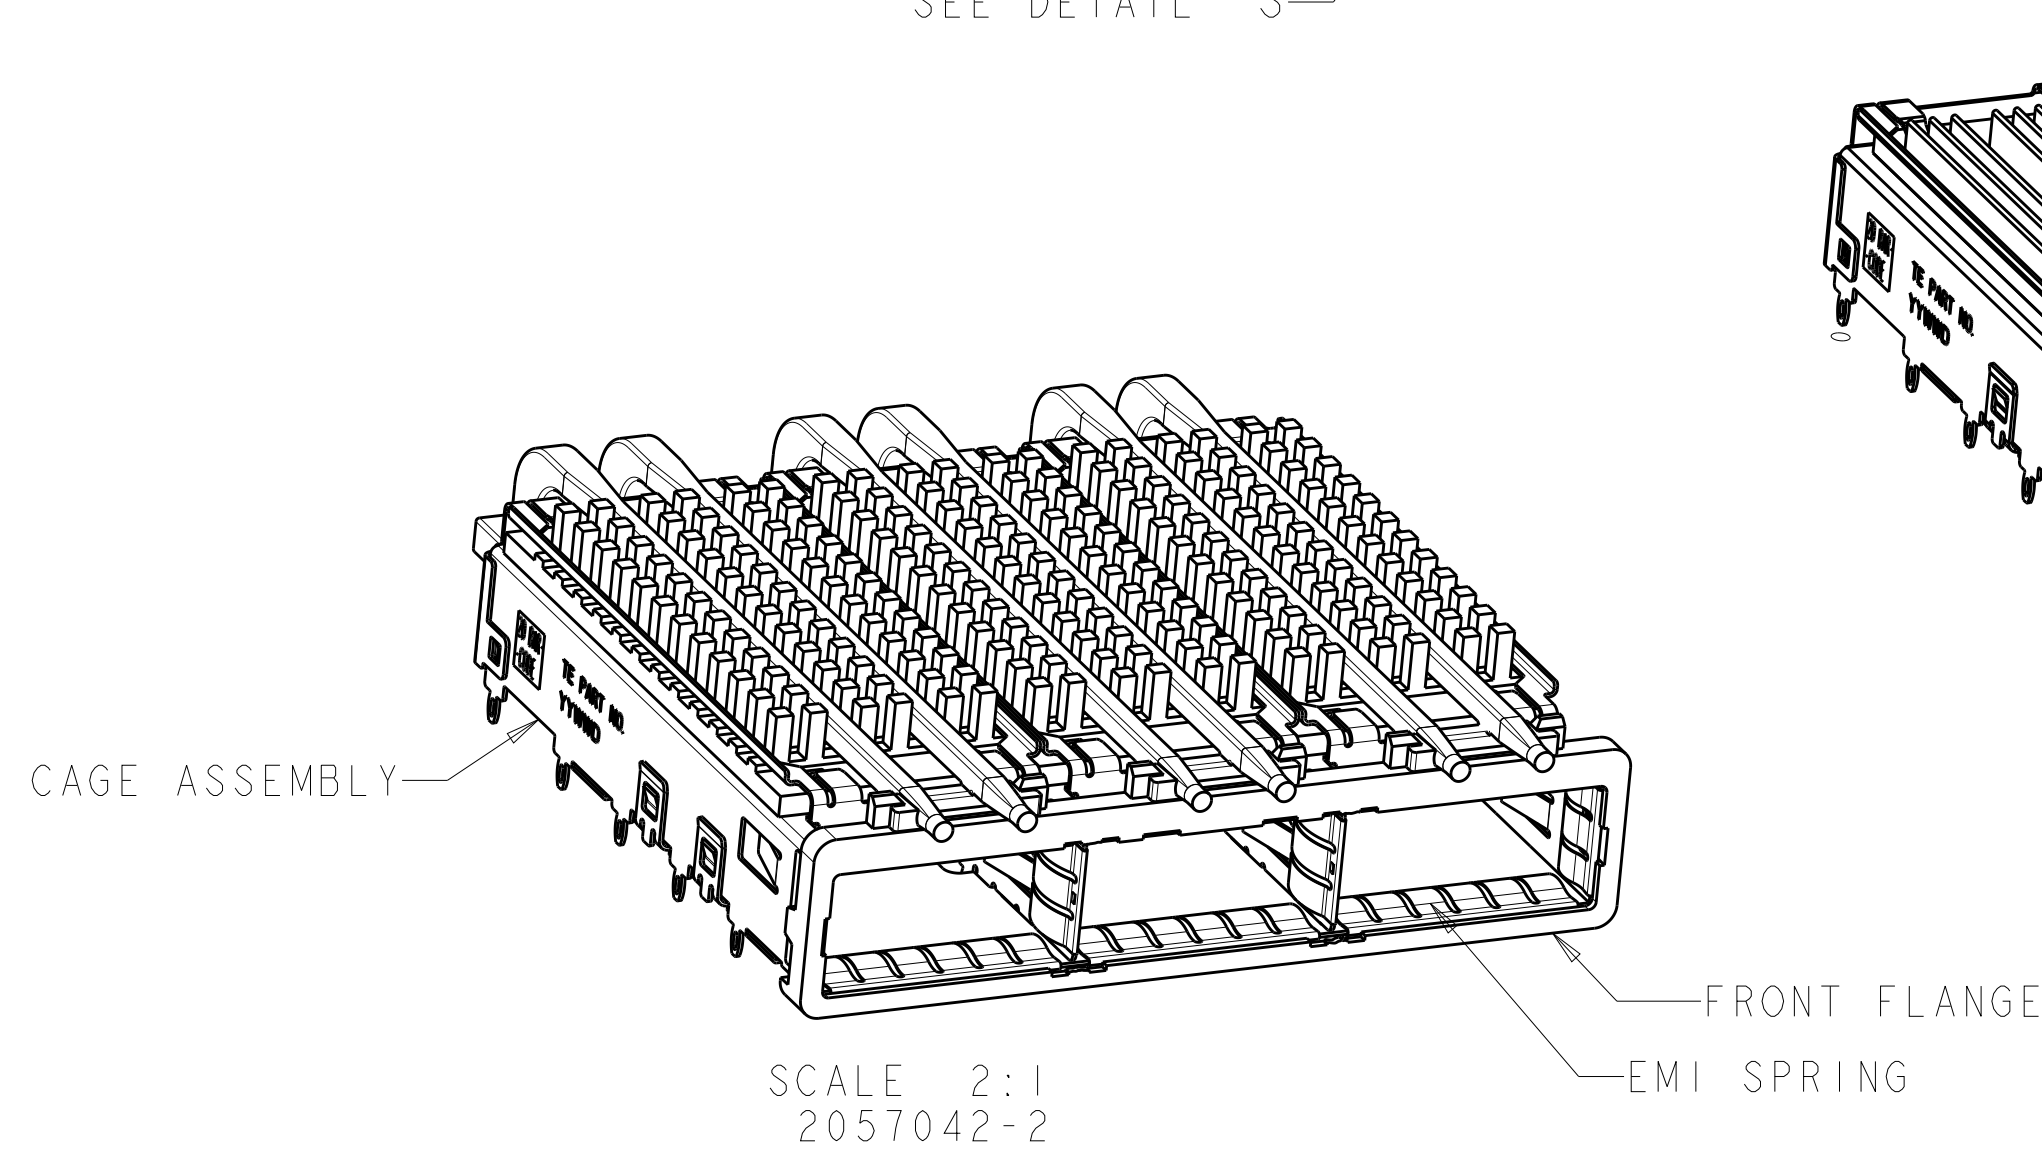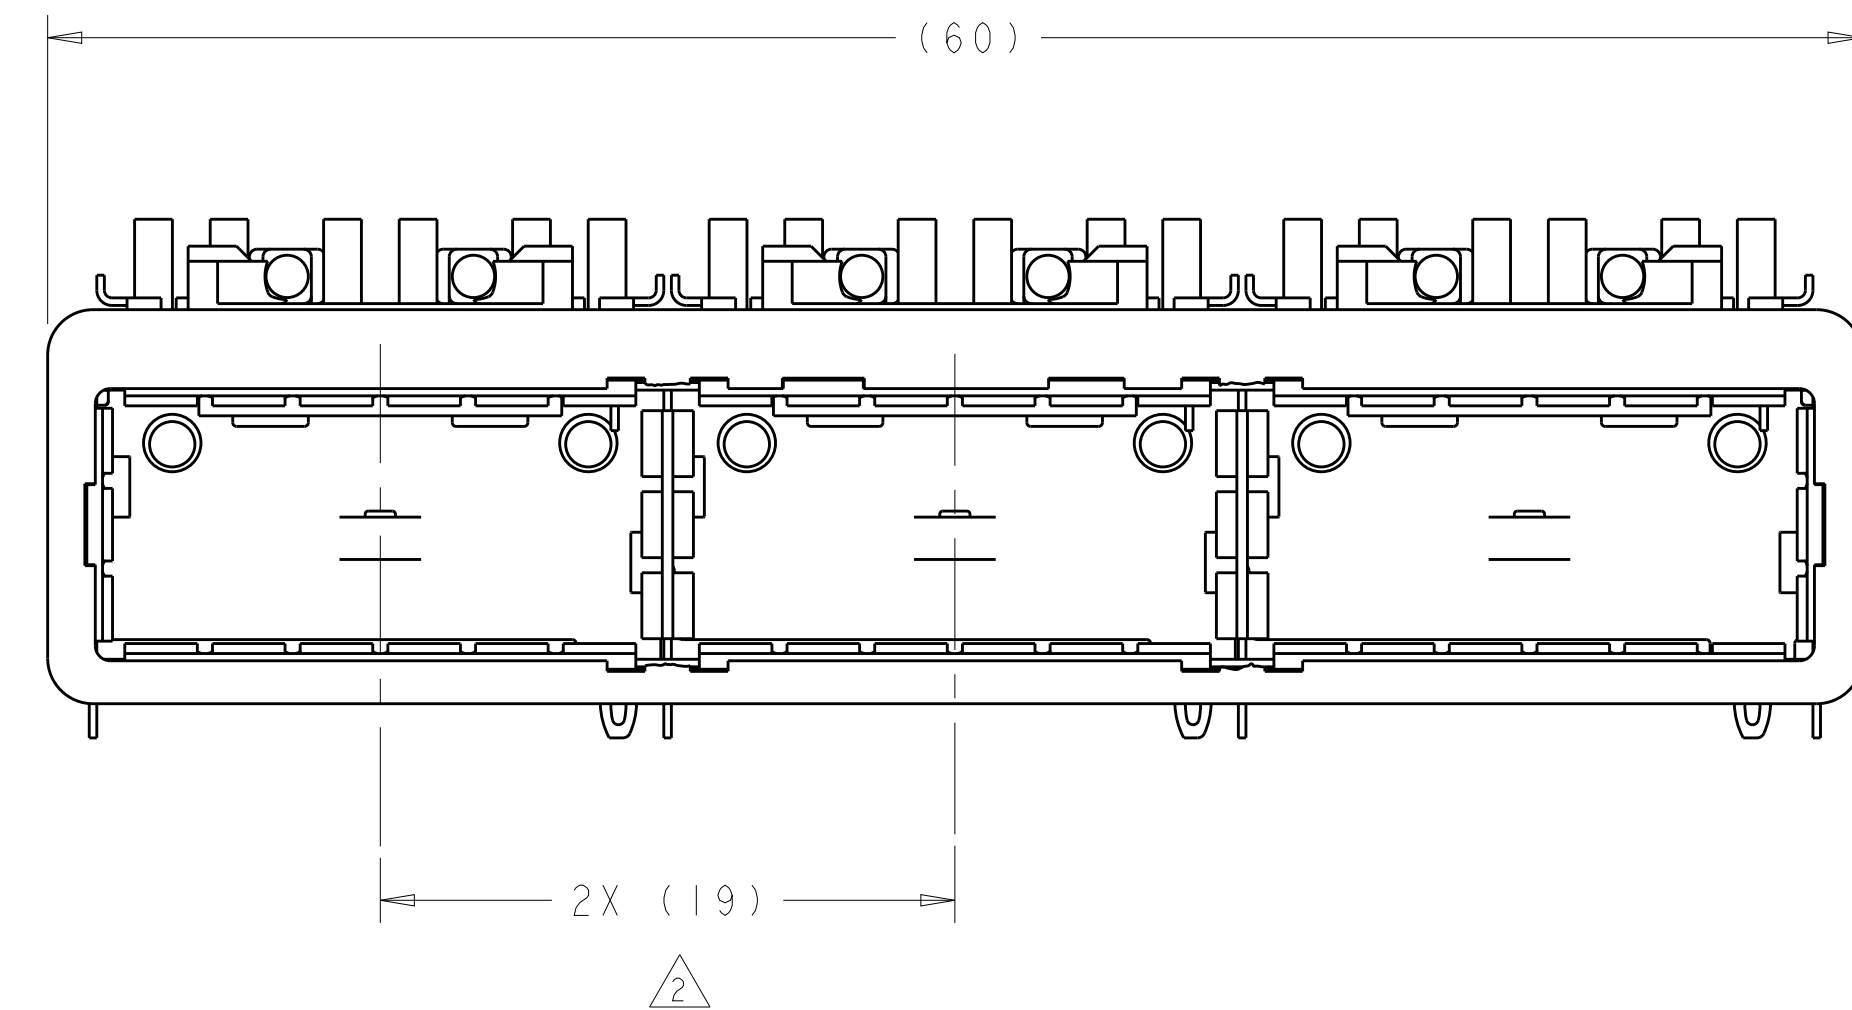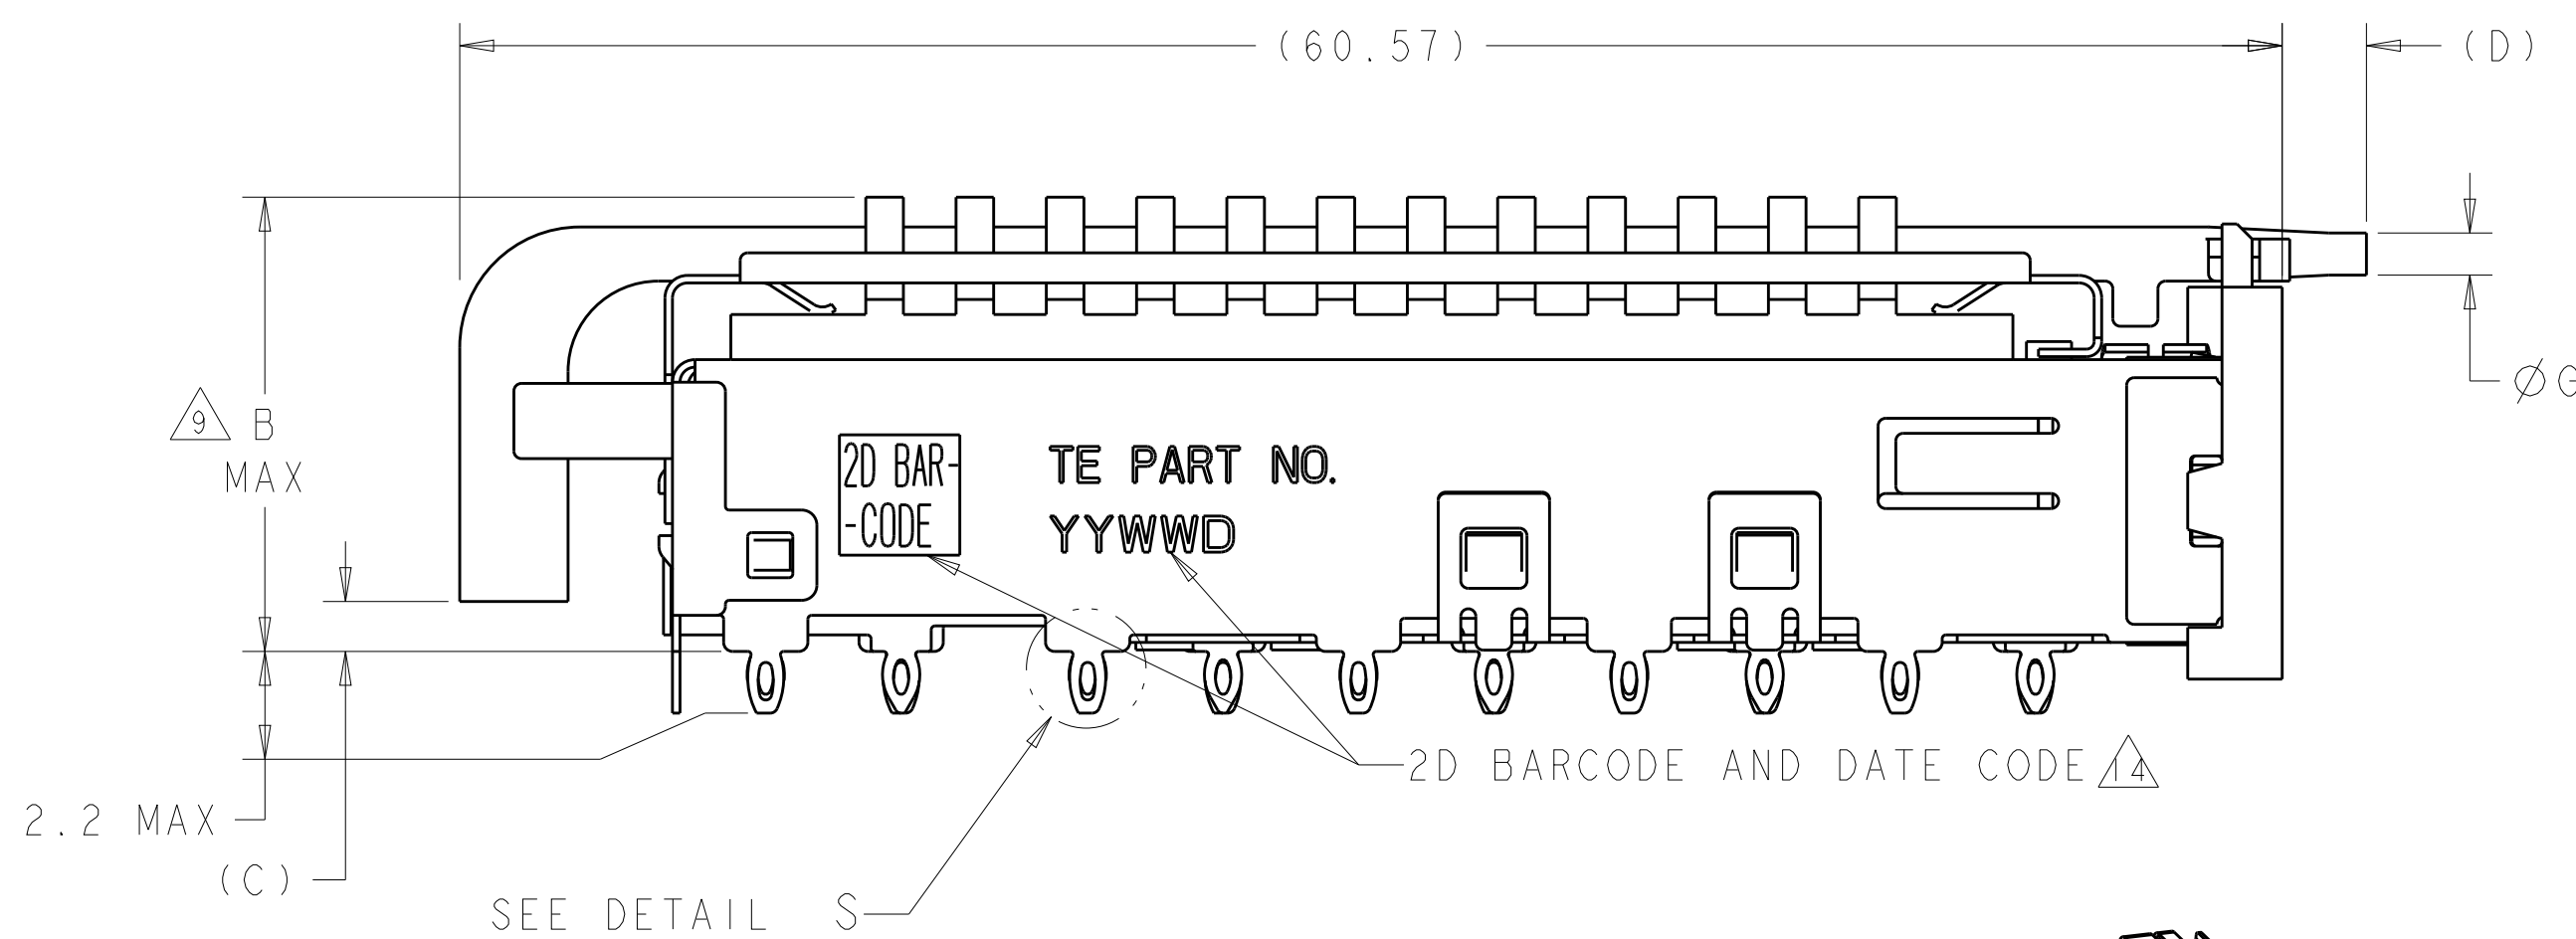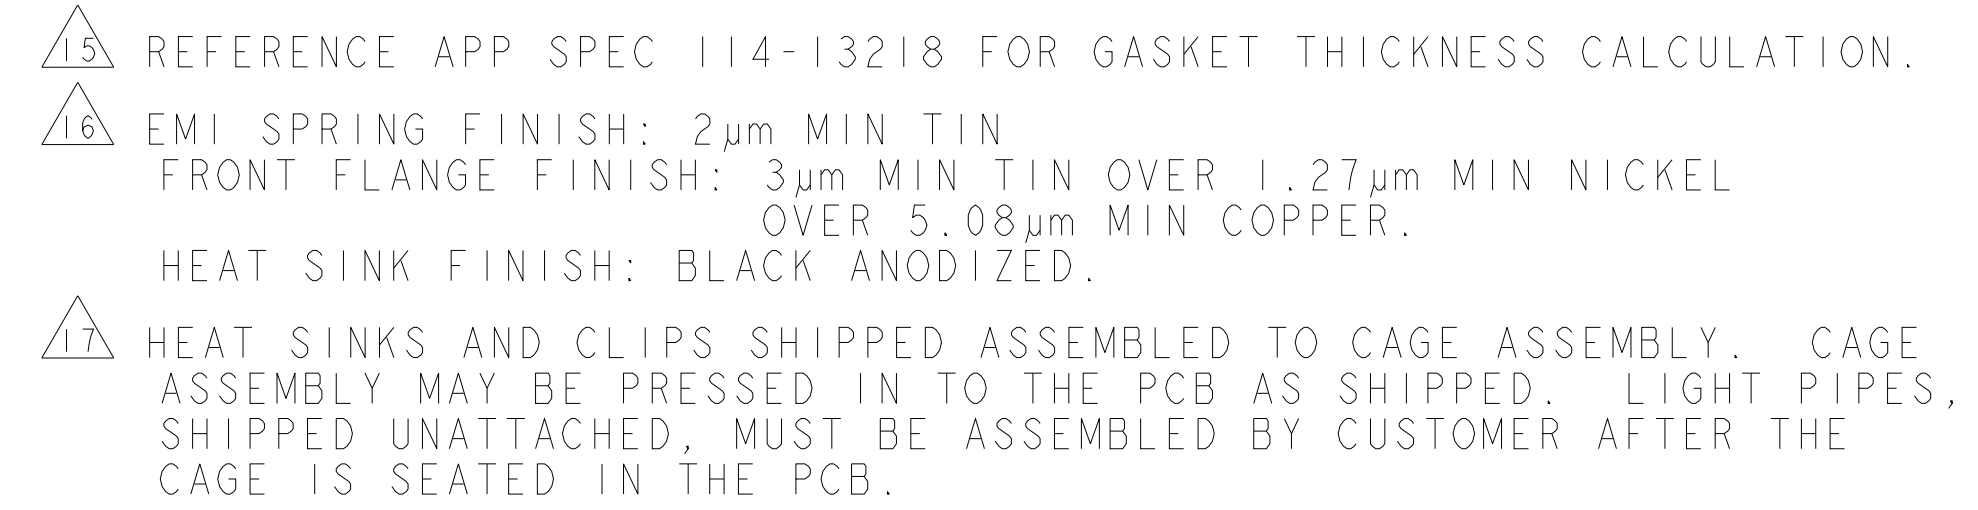


△7	1.4	0.8-1.1	2.0	1.70	21.0	FIN TYPE	I-2057042-1
	N/A	N/A	N/A	N/A	15.0	FIN TYPE	I-2057042-0
△7	2.0	0.8-1.1	3.5	1.70	16.8	CUSTOMERIZED	2057042-9
△7	1.4	0.8-1.1	2.0	1.70	23.0	NETWORKING	2057042-8
△7	1.4	0.8-1.1	2.0	1.70	16.0	SAN	2057042-7
△7	1.4	0.8-1.1	2.0	1.70	13.7	PCI	2057042-6
△7	1.4	1.3-1.4	5.7	2.15	16.0	SAN	2057042-5
△7	1.4	1.3-1.4	5.7	2.15	13.7	PCI	2057042-4
△7	1.4	0.8-1.1	2.8	1.70	23.0	NETWORKING	2057042-3
△7	1.4	0.8-1.1	2.8	1.70	16.0	SAN	2057042-2
△7	1.4	0.8-1.1	2.8	1.70	13.7	PCI	2057042-1
	G	E	D	C	B	HEAT SINK PROFILE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG C. VALENTINE CHK F. BRIGHT APVD F. BRIGHT 28FEB2008 28FEB2008 28FEB2008		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.1 2 PLC ±0.1 3 PLC ± 4 PLC ± ANGLES ±°		NAME IX3 GAGE ASSEMBLY, BEHIND BEZEL, W/ LIGHT PIPES AND HEAD SINKS, QSFP	
MATERIAL 		FINISH 		WEIGHT 114 - 13218	
CUSTOMER DRAWING		SIZE A1		GAGE CODE C=2057042	
		DRAWING NO 2057042		RESTRICTED TO -	
		SCALE 4:1		SHEET 1 OF 5	
				REV F	


LOC		DIST		REVISONS				
GP		00		P	LTR	DESCRIPTION		DATE
						SEE SHEET 1		

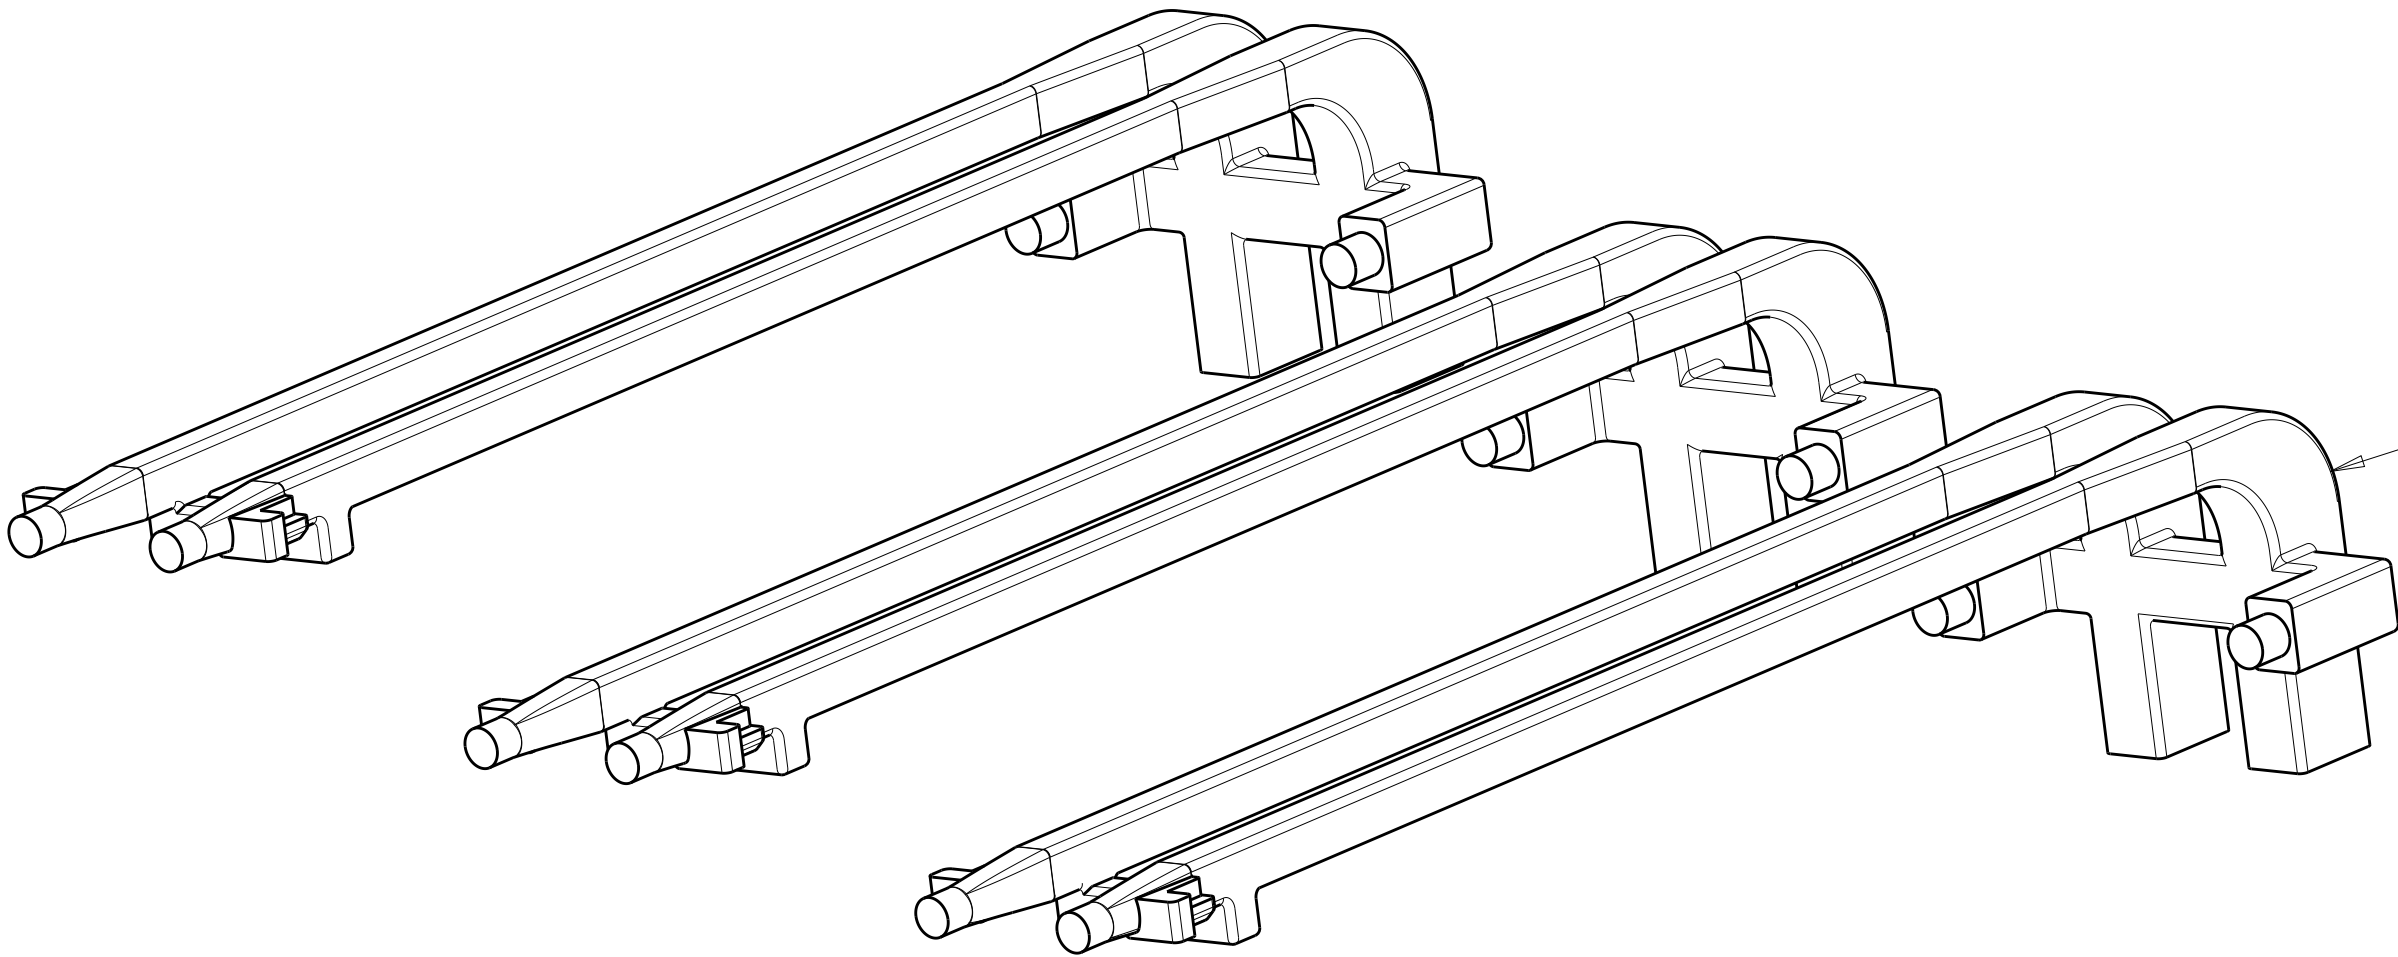


DOUBLE LIGHT PIPES
QUANTITY: 3

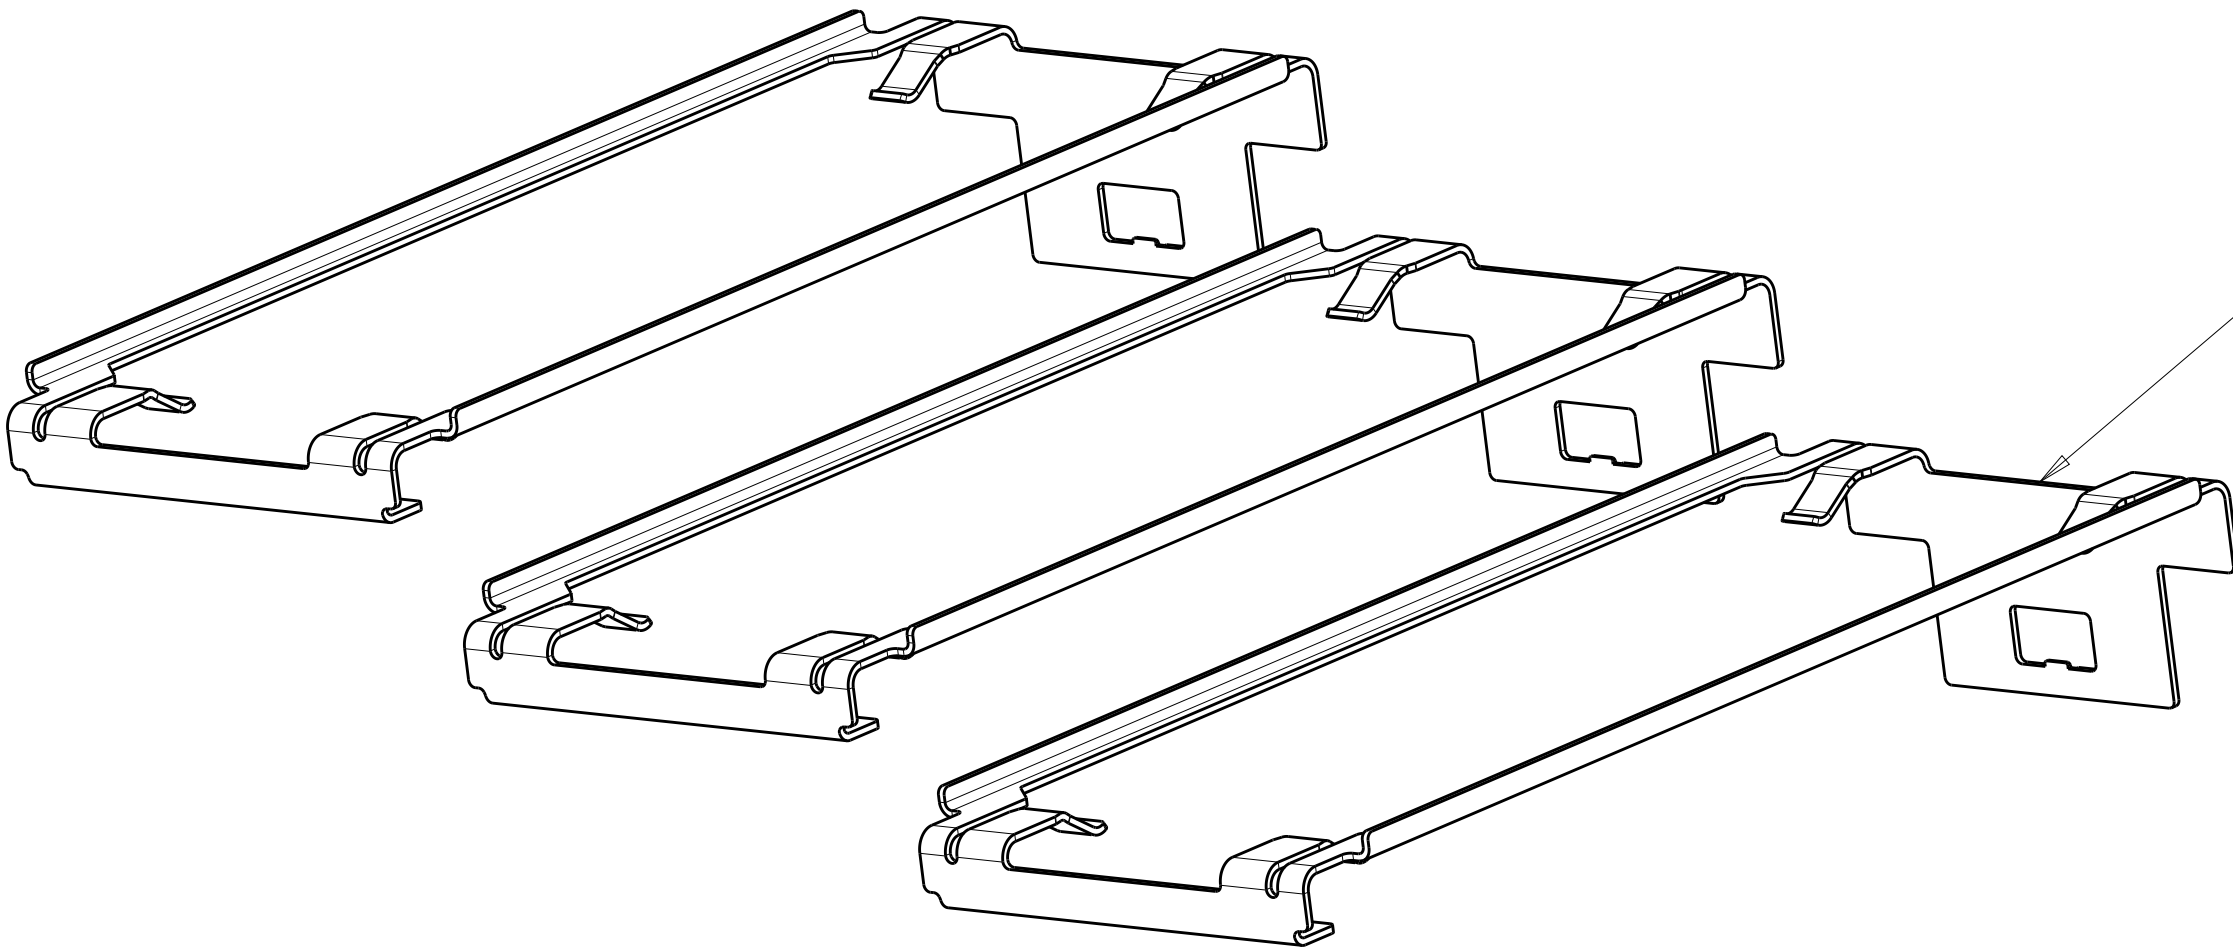

HEAT SINK CLIPS
QUANTITY: 3

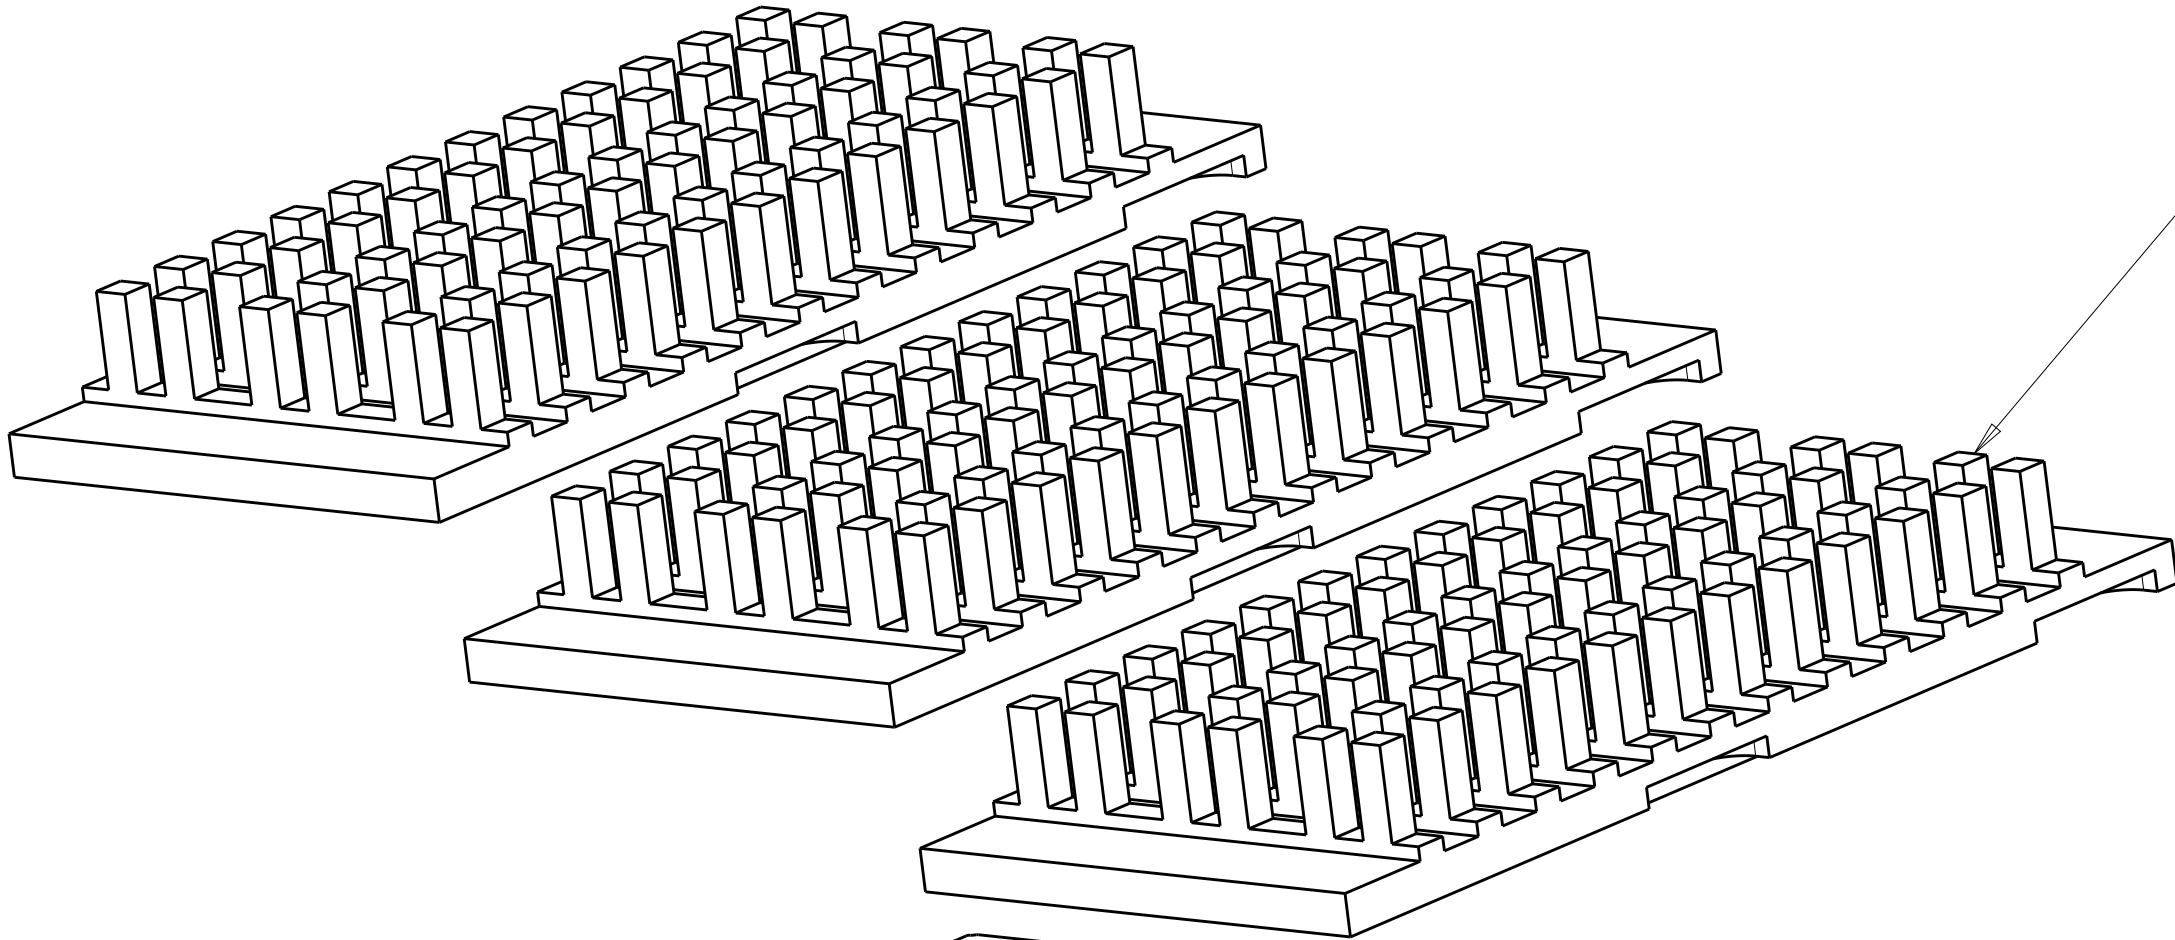

72 PIN HEAT SINKS
QUANTITY: 3

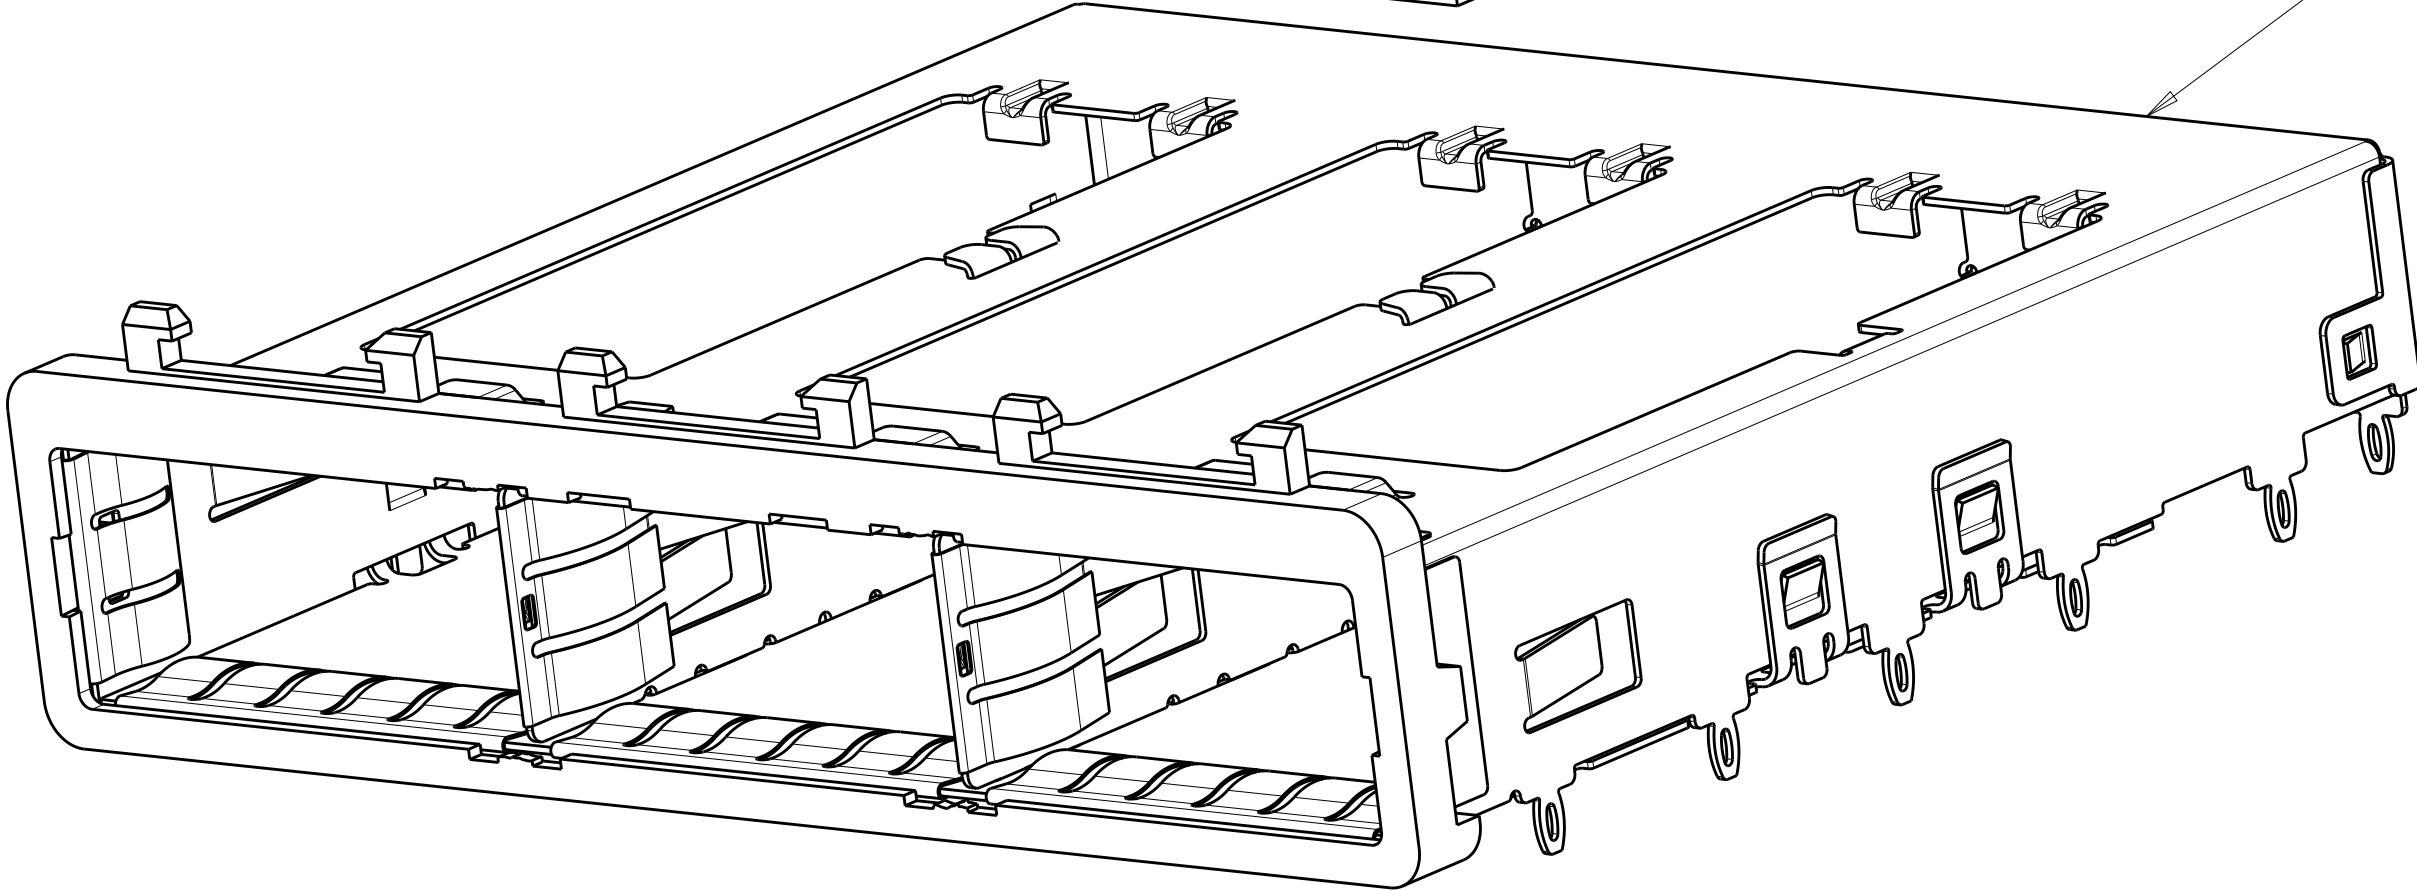


IX3 BEHIND BEZEL QSFP
CAGE ASSEMBLY
QUANTITY: 1



THIS PRODUCT HAS NOT COMPLETED
VALIDATION/QUALIFICATION TESTING

THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN	C. VALENTIN	28FEB2008	 TE Connectivity	
				CHK	E. BRIGHT	28FEB2008		
				APVD	F. BRIGHT	28FEB2008	NAME	
				PRODUCT SPEC			IX3 CAGE ASSEMBLY, BEHIND BEZEL,	
				108-2286			W/ LIGHT PIPES AND HEAT SINKS,	
				APPLICATION SPEC			QSFP	
				114-13218			SIZE	
				WEIGHT			CAGE CODE	
				CUSTOMER DRAWING			DRAWING NO	
							RESTRICTED TO	
							A100779C=2057042	
							SCALE	
							4:1	
							SHEET	
							2	
							OF	
							5	
							REV	
							F	


LOC		DIST		REVISIONS			
GP		00		P	LTR	DESCRIPTION	DATE
						SEE SHEET 1	

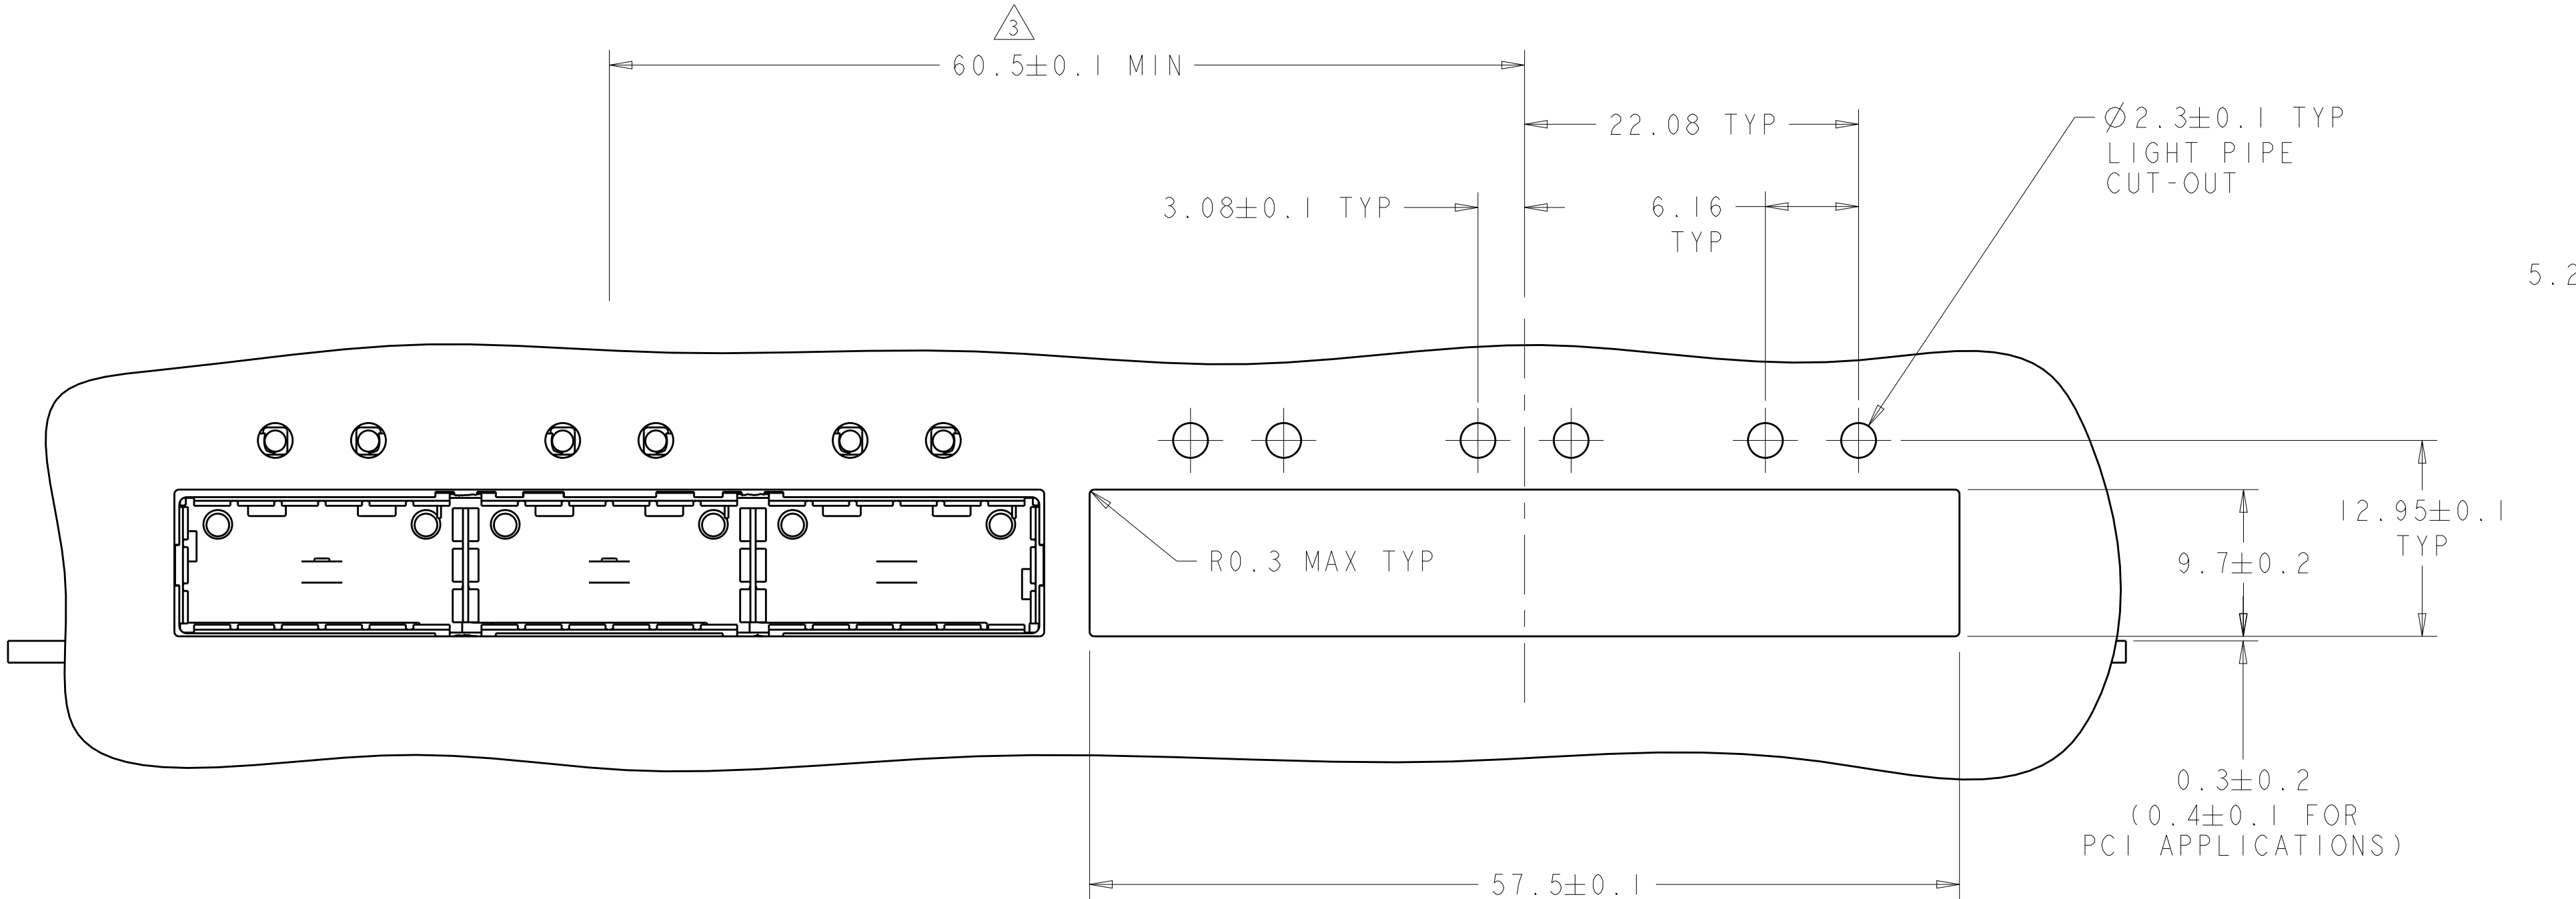

ONE SIDED CONFIGURATION
SCALE 3:1

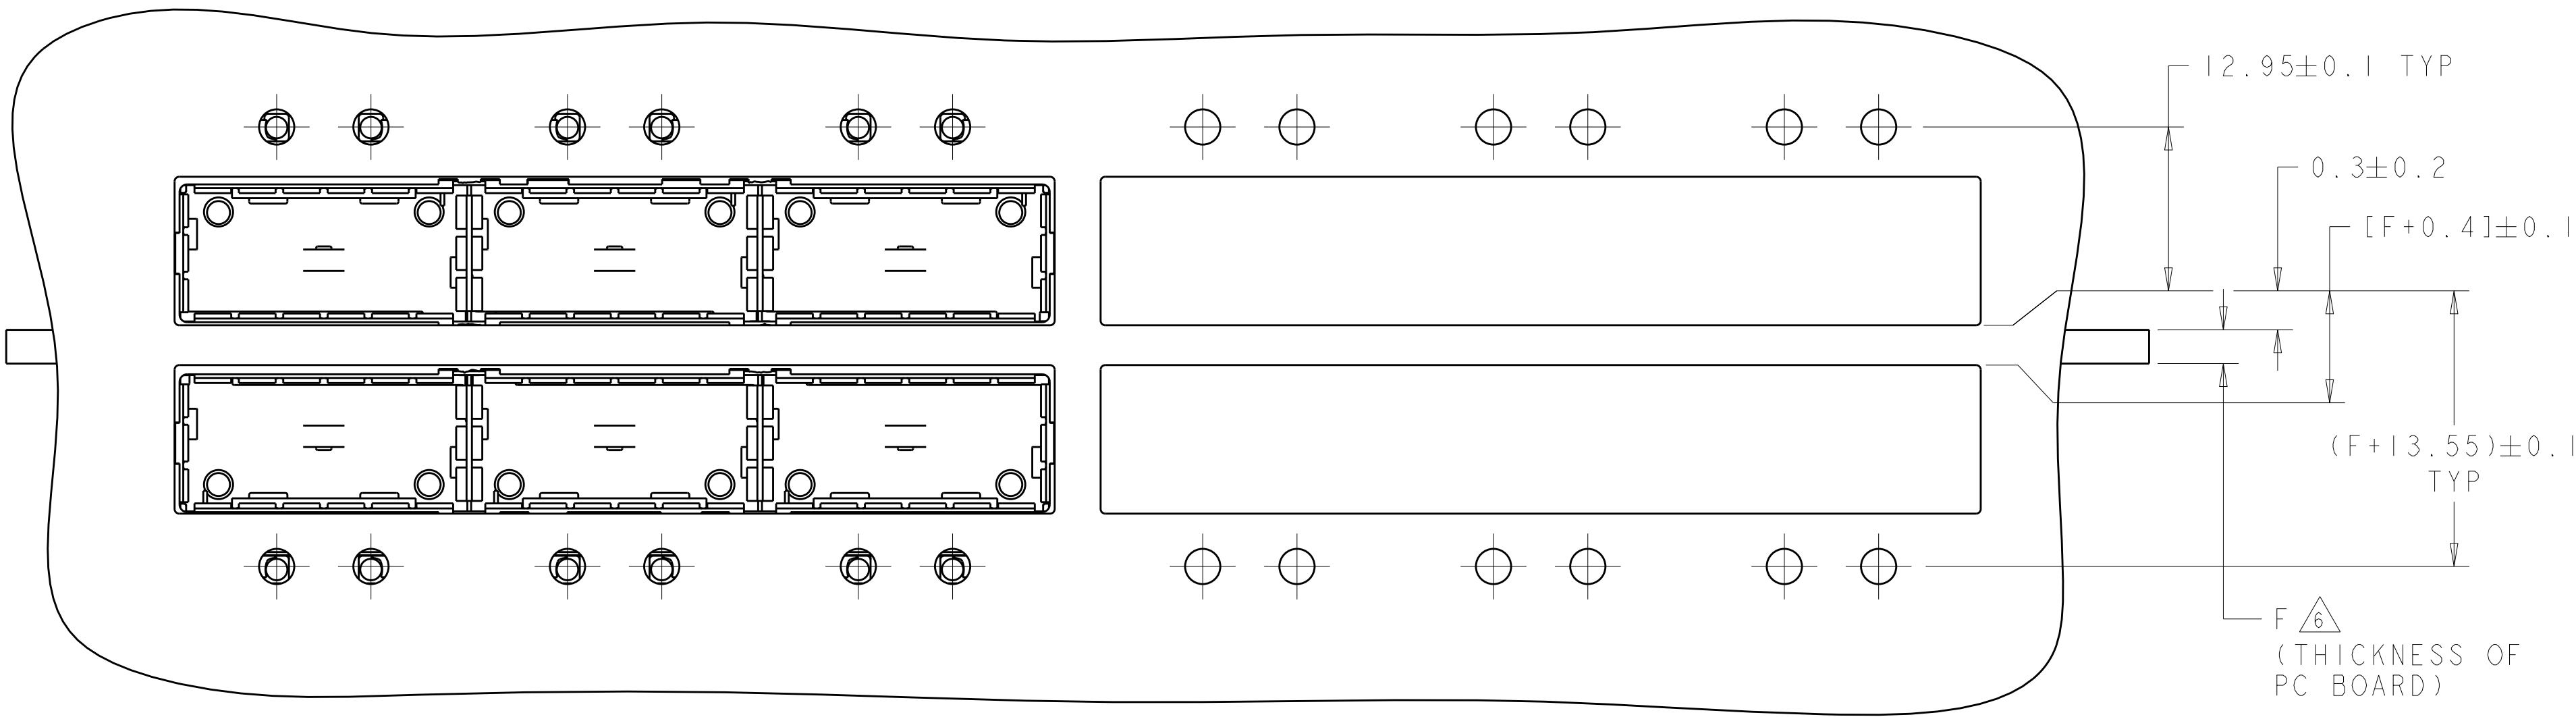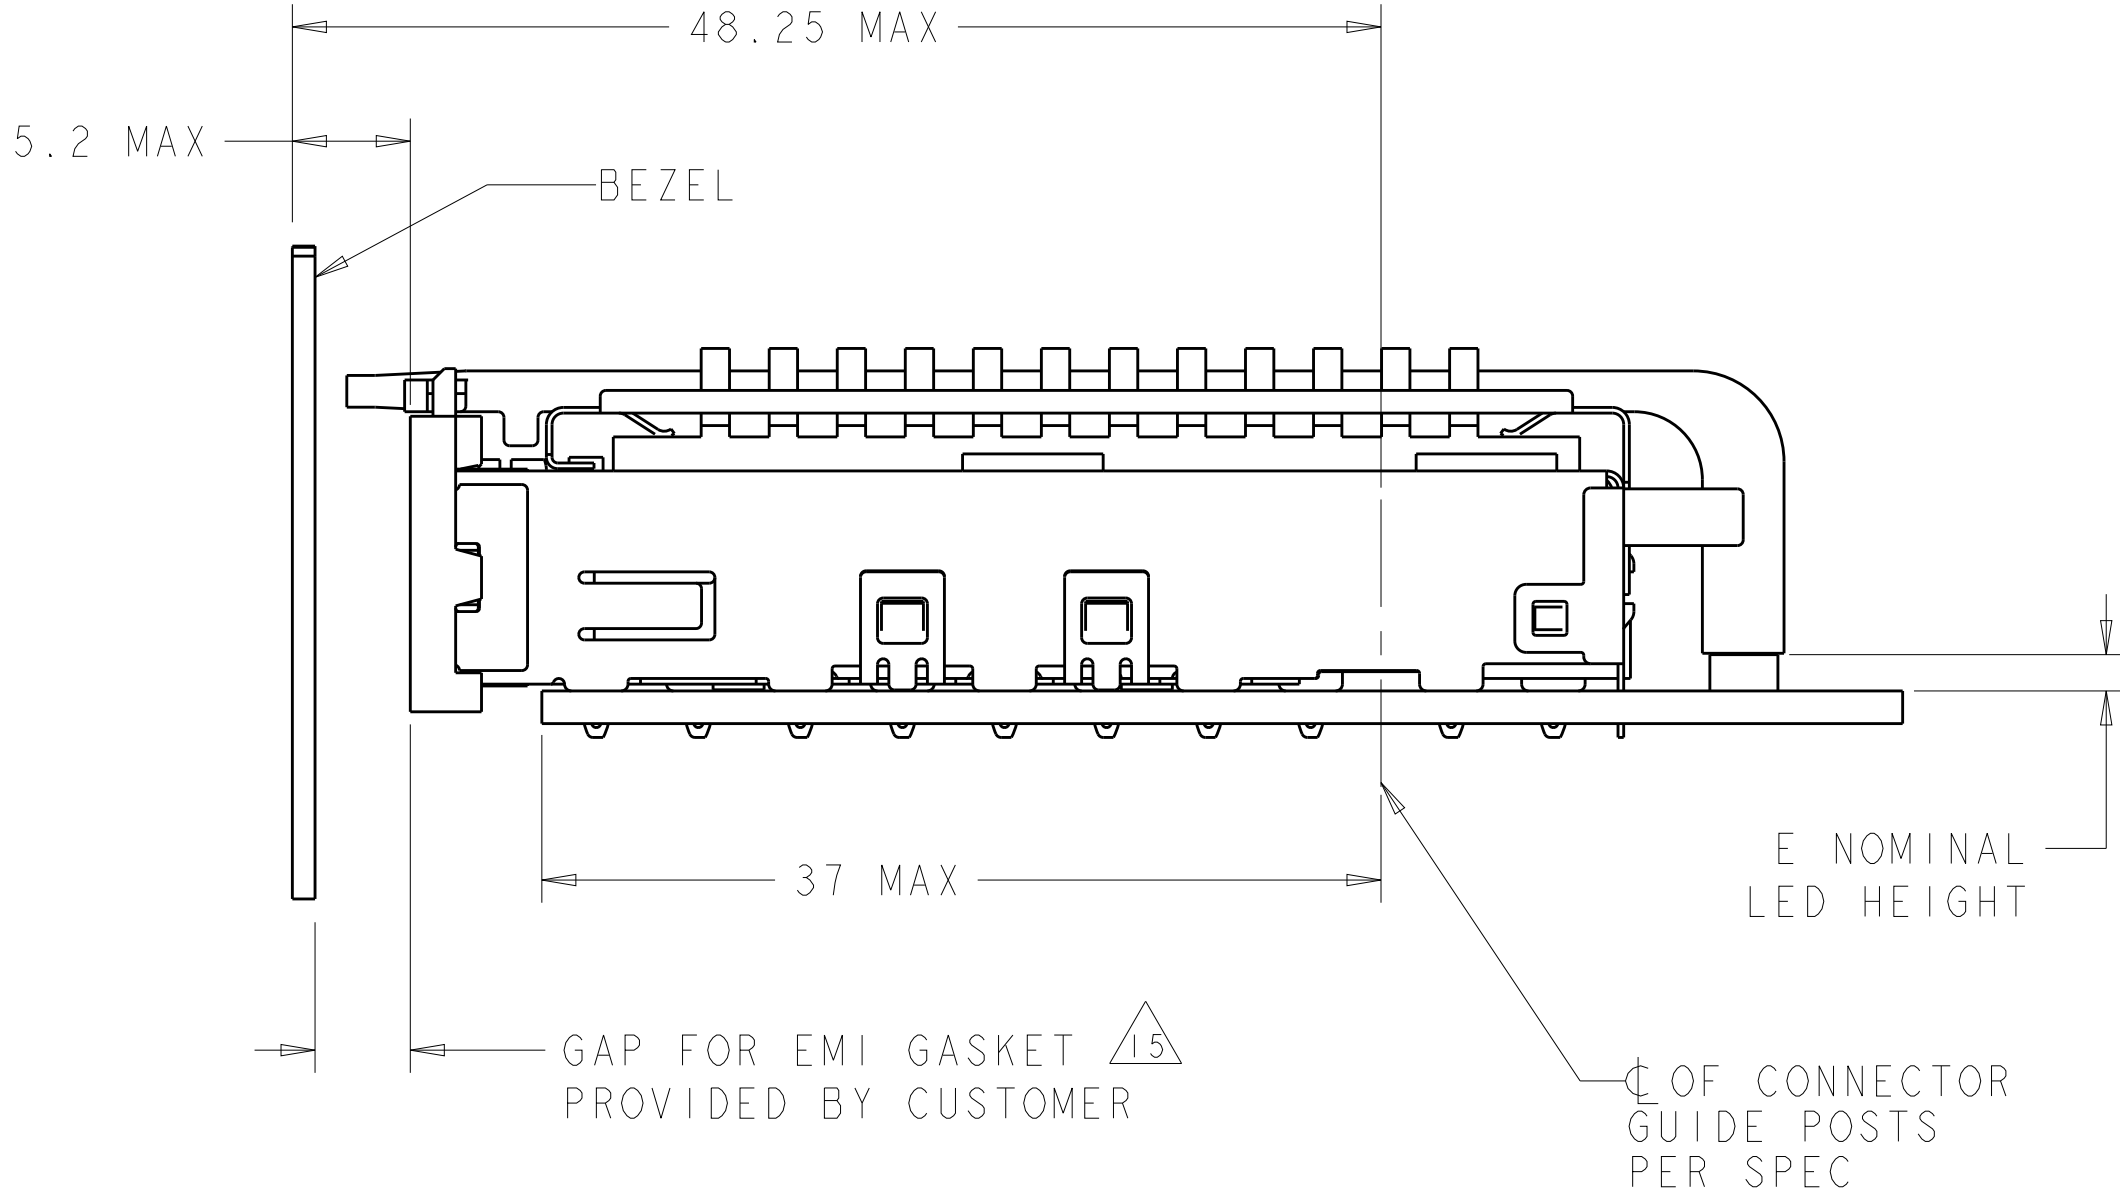


BELLY TO BELLY CONFIGURATION SIMILAR
TO ONE SIDED EXCEPT WHERE NOTED
SCALE 3:1

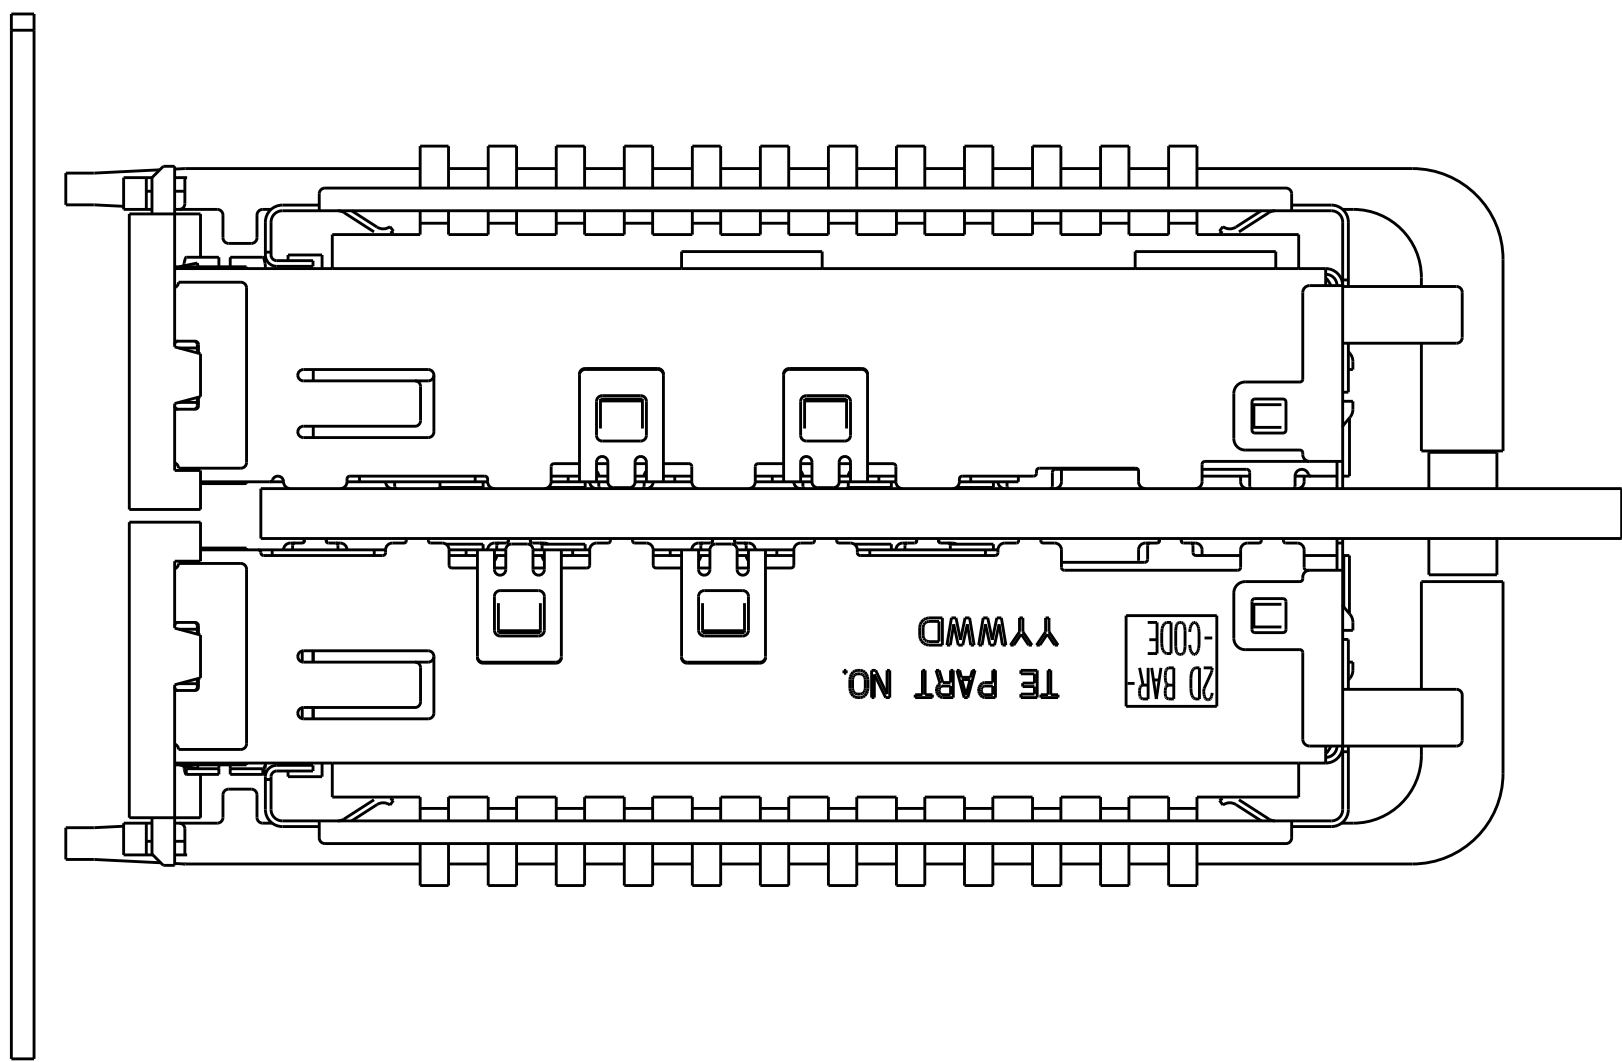


THIS PRODUCT HAS NOT COMPLETED VALIDATION/QUALIFICATION TESTING


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK E. BRIGHT APVD F. BRIGHT	28FEB2008 28FEB2008 28FEB2008	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±.1 4 PLC ±.1 ANGLES ±.1 FINISH		1X3 CAGE ASSEMBLY, BEHIND BEZEL, W/ LIGHT PIPES AND HEAT SINKS, QSFP	
MATERIAL		PRODUCT SPEC		SIZE	
		APPLICATION SPEC		CAGE CODE	
		114-13218		DRAWING NO	
		WEIGHT		RESTRICTED TO	
		CUSTOMER DRAWING		A100779C=2057042	
		SCALE		SHEET	
		4:1		3 OF 5	
				REV	
				F	

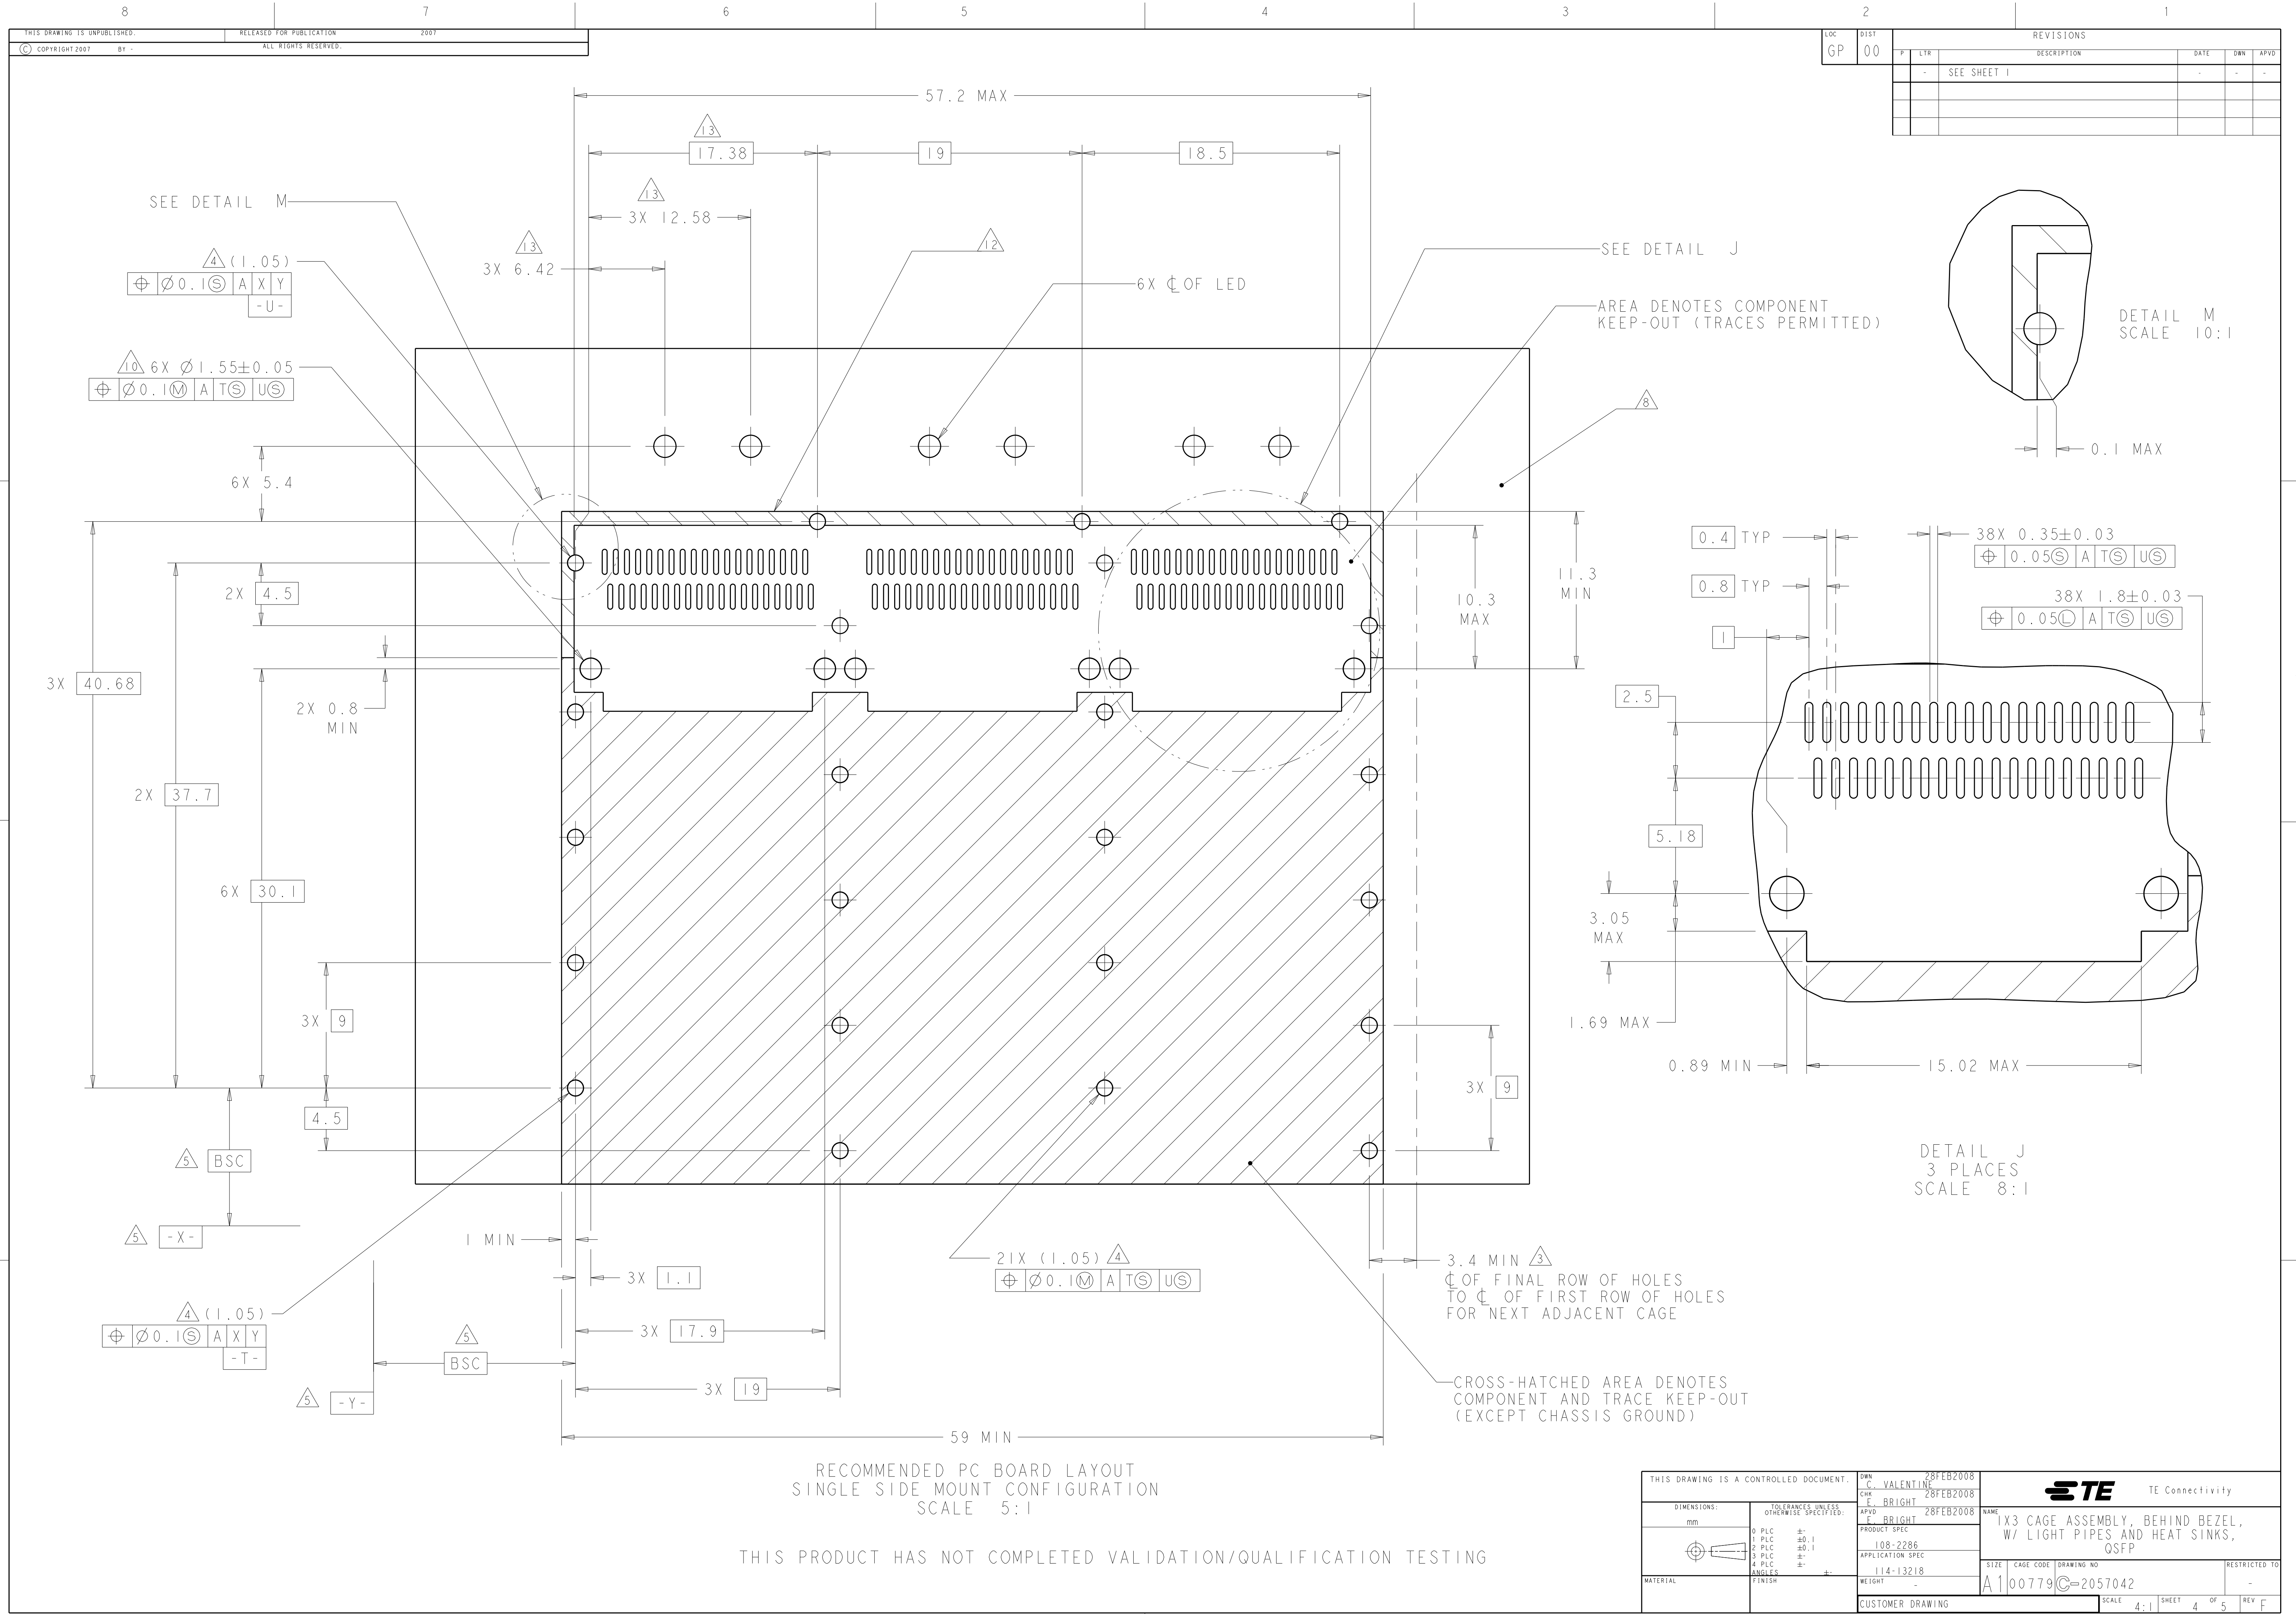

LOC		DIST		REVISONS			
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

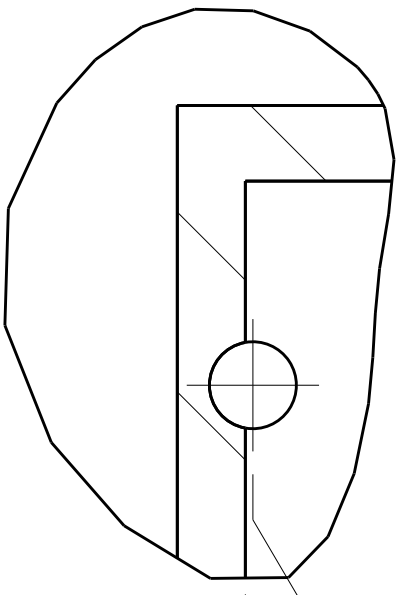

DETAIL M
SCALE 10:1

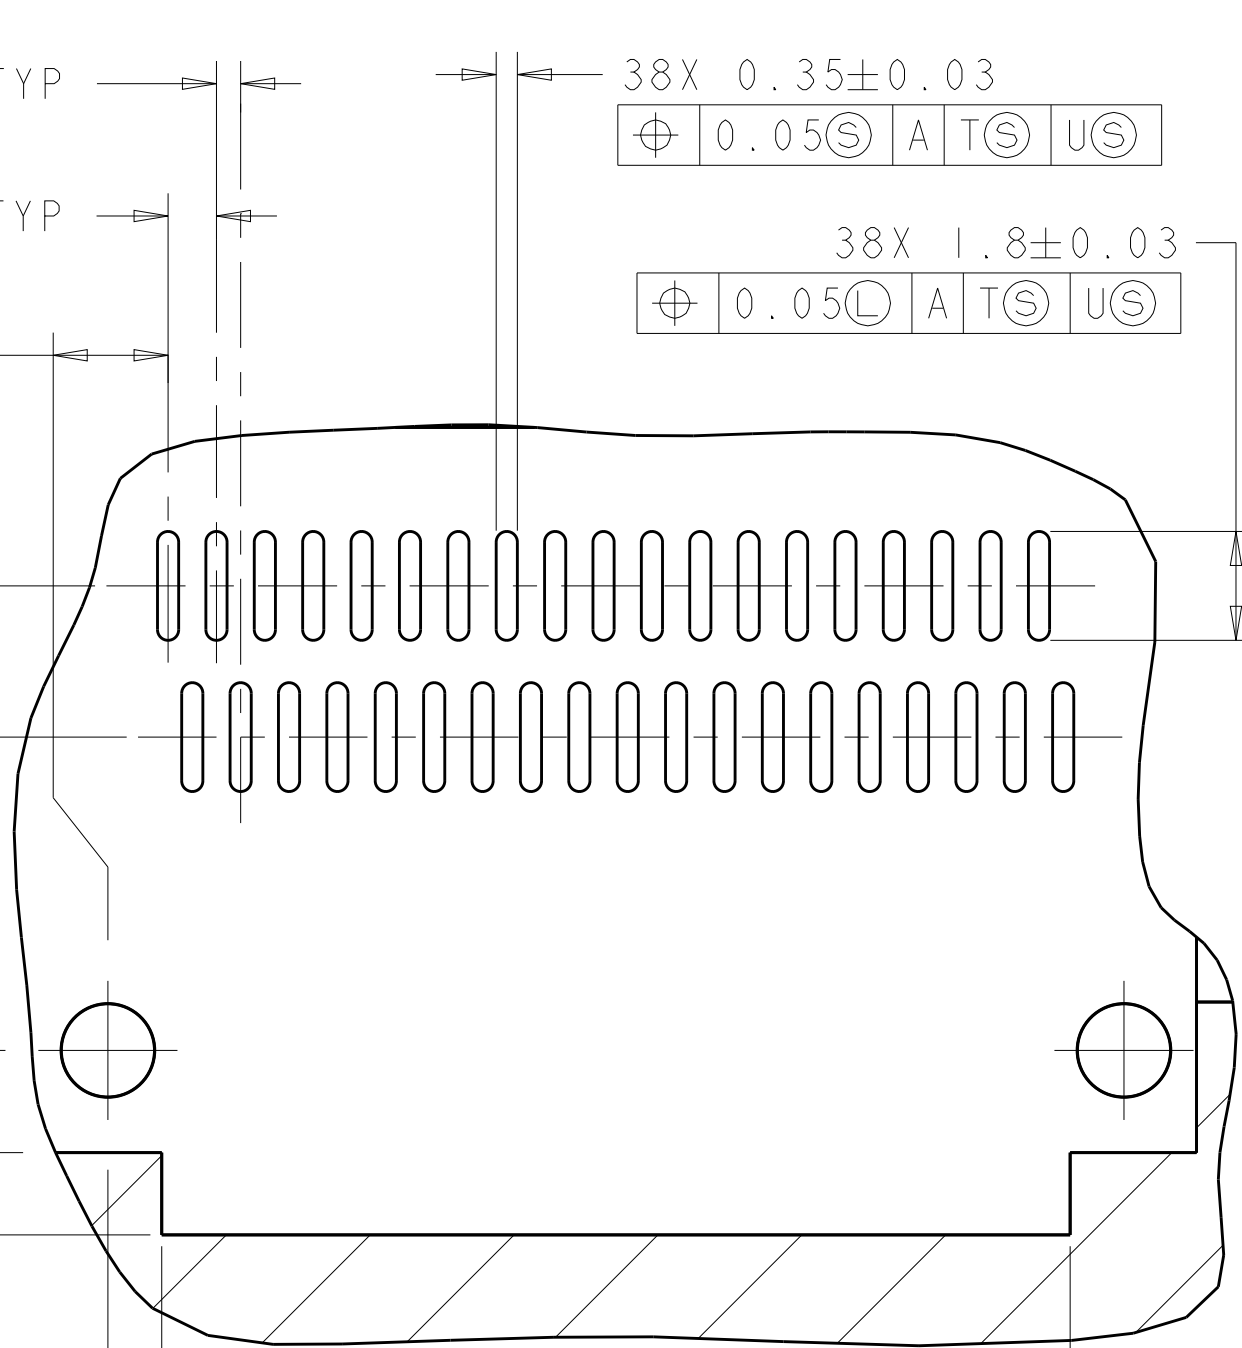

DETAIL J
3 PLACES
SCALE 8:1

RECOMMENDED PC BOARD LAYOUT
SINGLE SIDE MOUNT CONFIGURATION
SCALE 5:1

THIS PRODUCT HAS NOT COMPLETED VALIDATION/QUALIFICATION TESTING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK E. BRIGHT APVD F. BRIGHT	28FEB2008 28FEB2008 28FEB2008	NAME IX3 CAGE ASSEMBLY, BEHIND BEZEL, W/ LIGHT PIPES AND HEAT SINKS, QSFP	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-2286	
0 PLC ±.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±.1 4 PLC ±.1 ANGLES ±.1		FINISH		APPLICATION SPEC 114-13218	
MATERIAL		WEIGHT		RESTRICTED TO A100779C=2057042	
CUSTOMER DRAWING		SCALE 4:1		SHEET 4 OF 5 REV F	



LOC		DIST		REVISIONS					
GP	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
		-		SEE SHEET 1			-	-	-

D

C

B

A

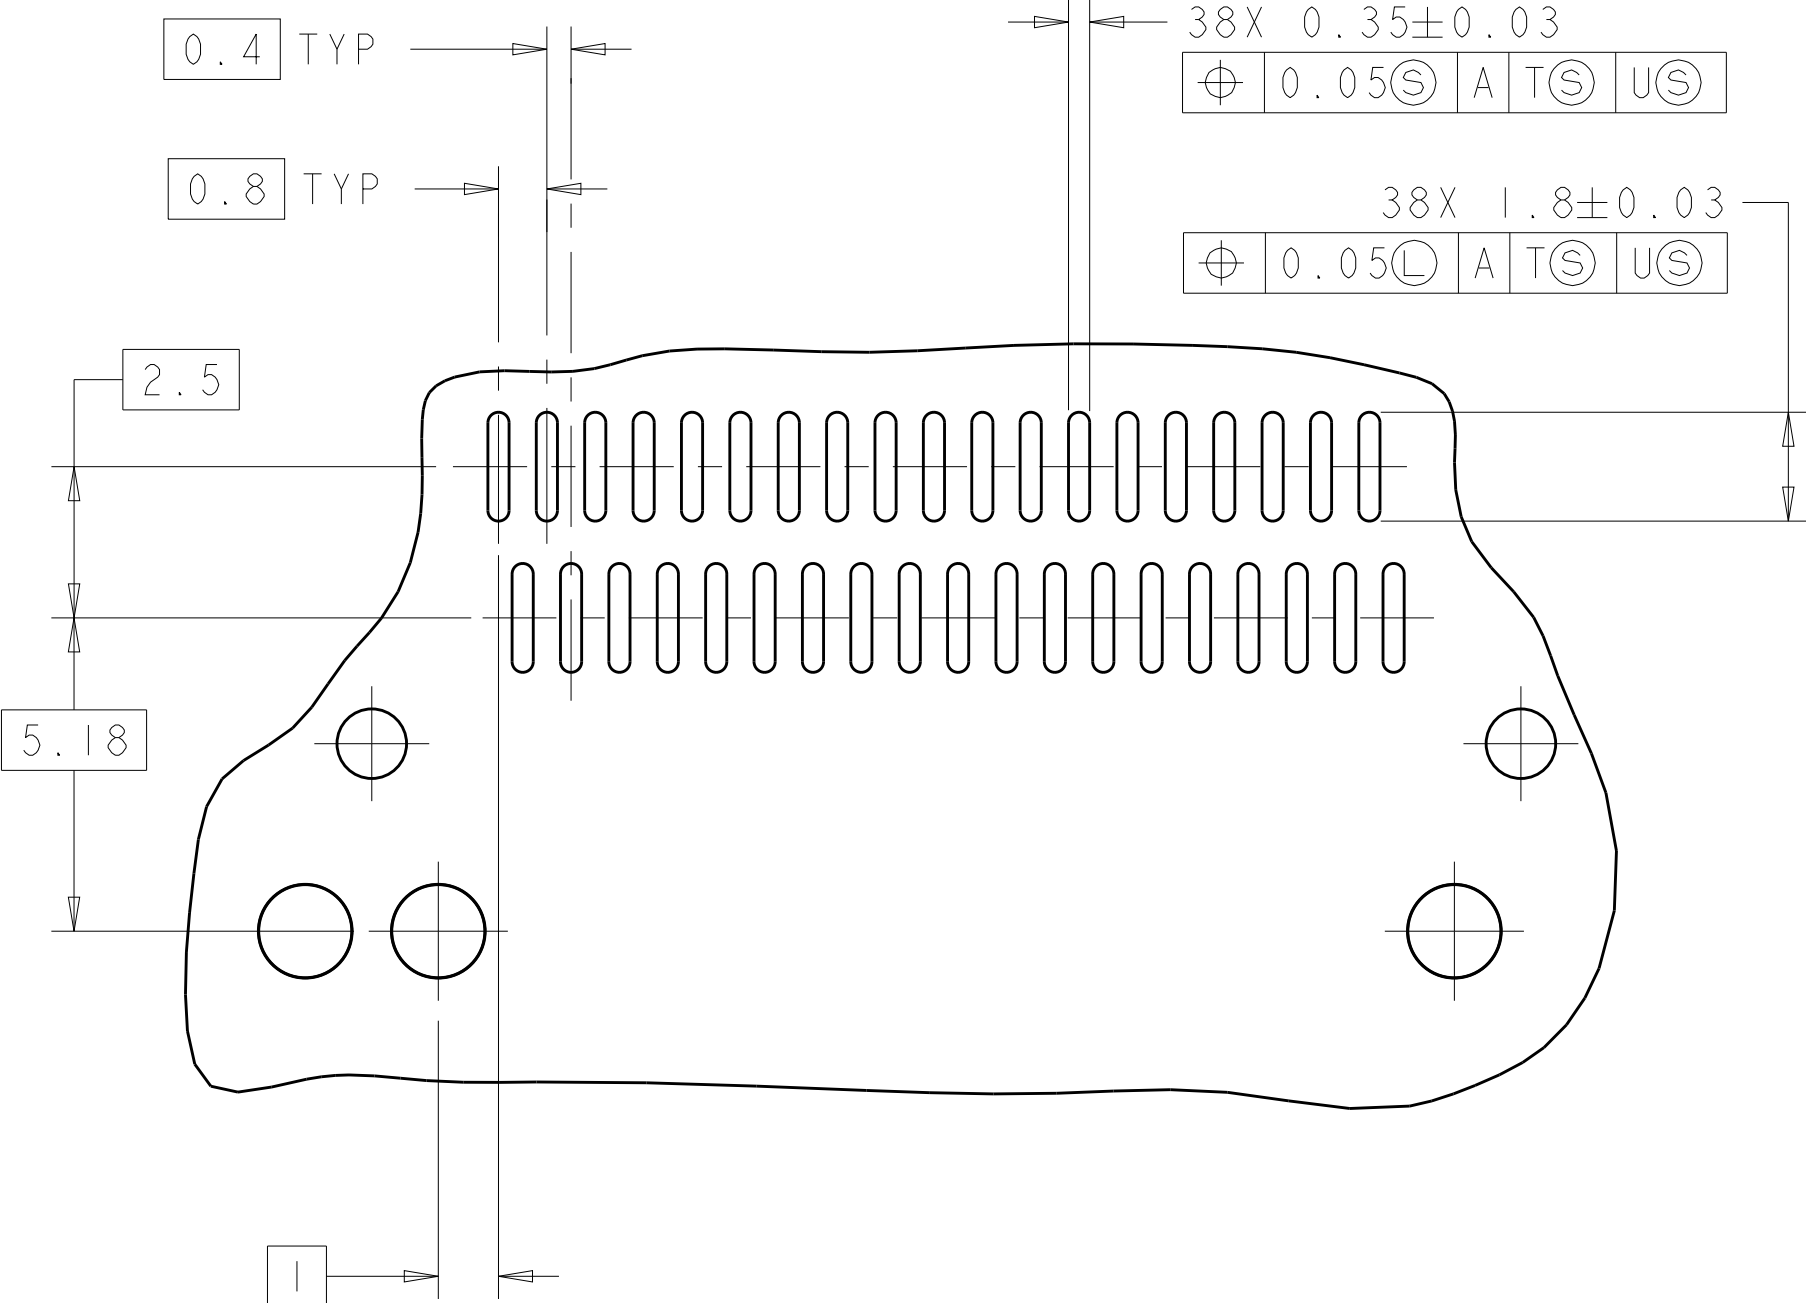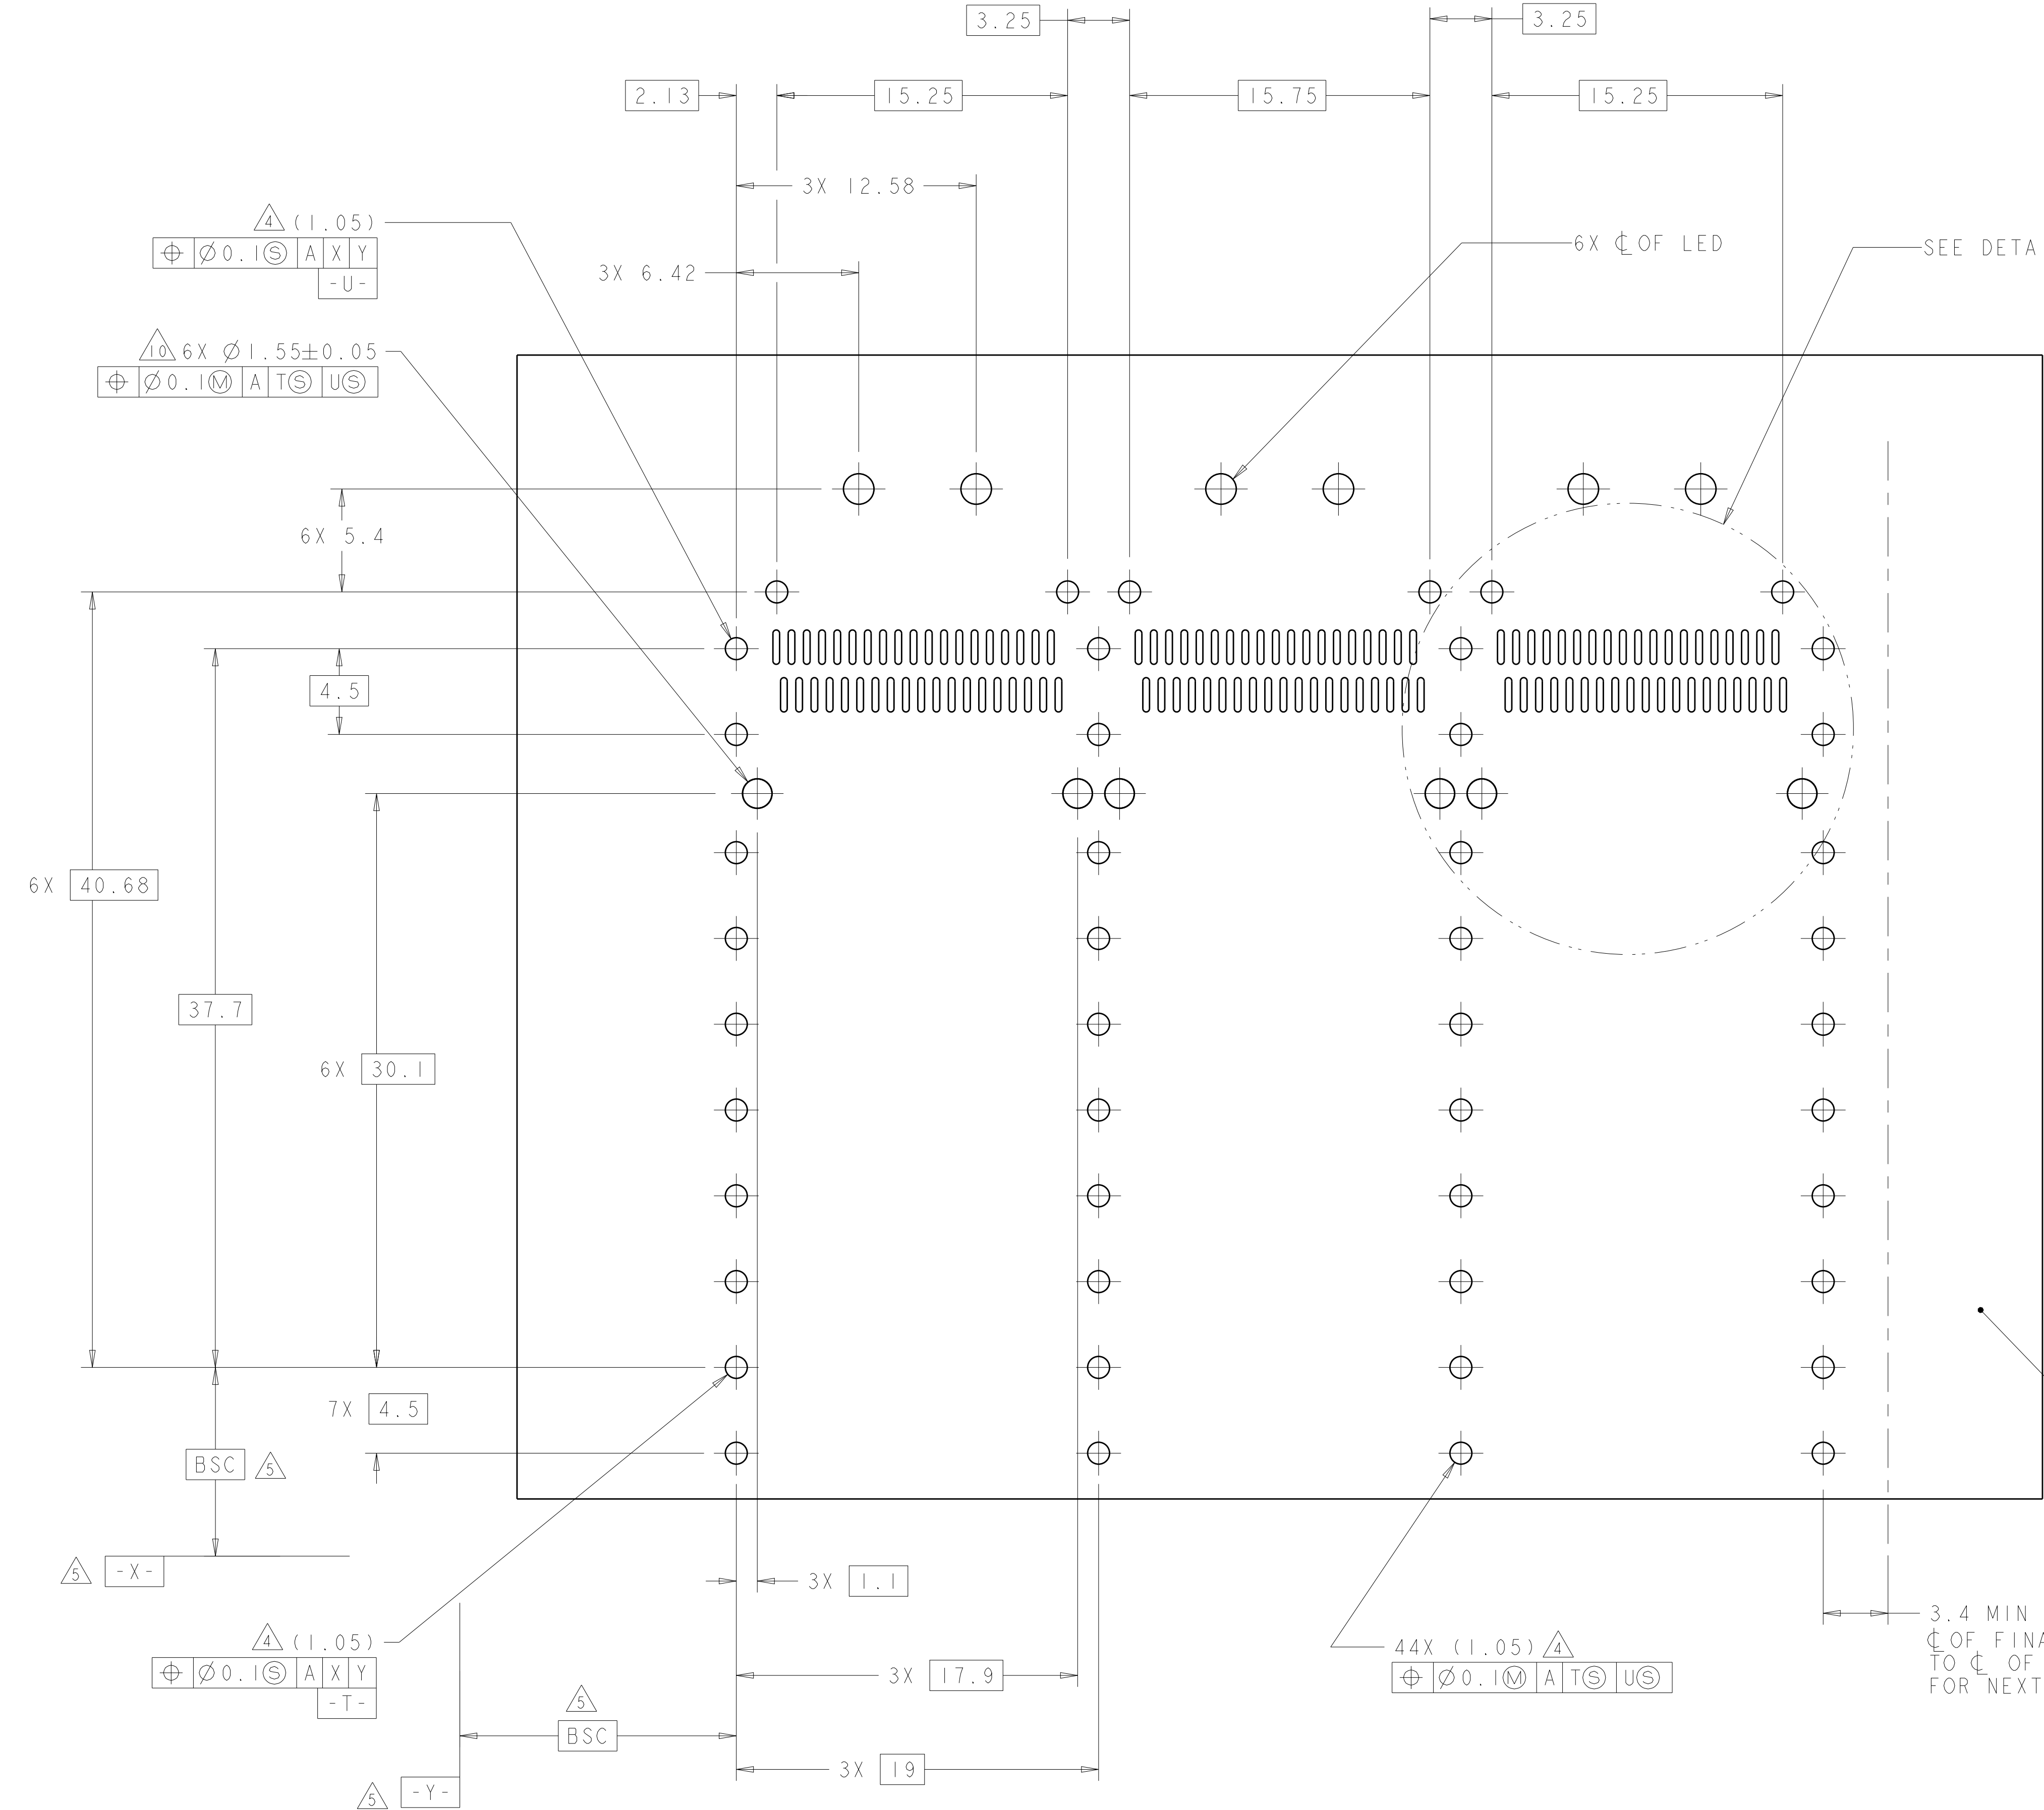

DETAIL K
3 PLACES
SCALE 8:1

RECOMMENDED PC BOARD LAYOUT
BELLY TO BELLY CONFIGURATION
SEE SHEET 4 FOR COMPONENT
AND TRACE KEEP-OUTS
SCALE 5:1

THIS PRODUCT HAS NOT COMPLETED VALIDATION/QUALIFICATION TESTING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE 28FEB2008	 TE Connectivity	
DIMENSIONS:		CHK E. BRIGHT 28FEB2008		
mm		APVD F. BRIGHT 28FEB2008	NAME 1X3 CAGE ASSEMBLY, BEHIND BEZEL, W/ LIGHT PIPES AND HEAT SINKS, QSFP	
		PRODUCT SPEC 108-2286	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		APPLICATION SPEC 114-13218		
MATERIAL		WEIGHT -	A100779C=2057042	
FINISH				
		CUSTOMER DRAWING	SCALE 4:1	
			SHEET 5 OF 5	
			REV F	