
molex
one company > a world of innovation

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0366330020
Status: Active
Overview: minifit_jr
Description: 4.20mm (.165") Mini-Fit Jr.™ Header, Right Angle, Nylon, without Mounting Flange, 4 Circuits, Tin (Sn) over Nickel (Ni) Plating, Lead free

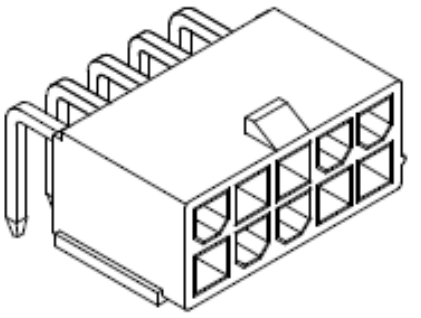

Series image - Reference only

Documents:
Drawing (PDF)
RoHS Certificate of Compliance (PDF)
Product Specification PS-87427-0001 (PDF)

General

Product Family	PCB Headers
Series	87427
Application	Wire-to-Board
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS™ Crimp Terminal Crimpted to to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current de-rating information.
Overview	minifit_jr
Product Name	Mini-Fit Jr.™

Physical

Breakaway	No
Circuits (Loaded)	4
Color - Resin	Beige
Durability (mating cycles max)	30
First Mate / Last Break	No
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.130 In
PC Tail Length (mm)	3.30 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.165 In
Pitch - Mating Interface (mm)	4.20 mm
Pitch - Term. Interface (in)	0.165 In
Pitch - Term. Interface (mm)	4.20 mm
Plating min: Mating (µin)	100
Plating min: Mating (µm)	2.54
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.54
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40°C to +105°C

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
87427Series

Mates With
5557 Mini-Fit Jr.™ Receptacle Housing

Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	13A
Voltage - Maximum	600V


Material Info


Reference - Drawing Numbers


Packaging Specification	PK-87427-001
Product Specification	PS-87427-0001
Sales Drawing	SD-87427-**0*


This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



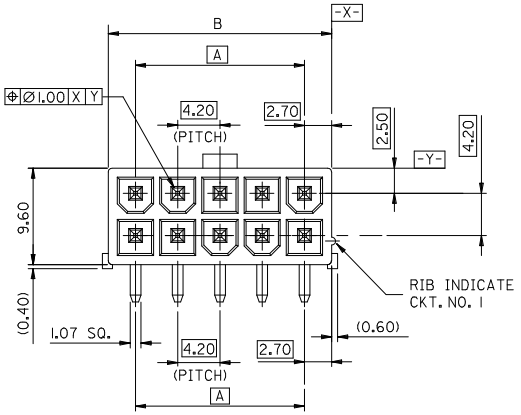

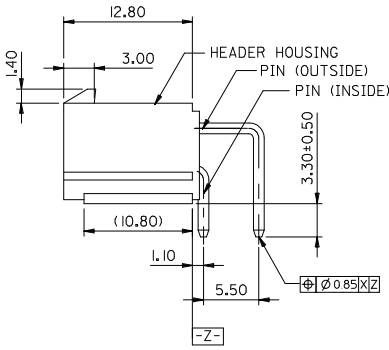



ISOMETRIC VIEW


LEGEND

87427-****


CKT. SIZE (SEE SHEET 2).

PLATING OPTIONS
2 = NOTE 2
3 = NOTE 3

PACKAGING OPTIONS
0 = TRAY PACKED
2 = TUBE PACKED

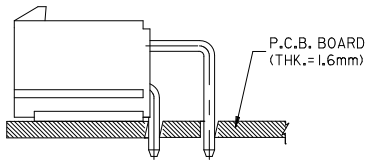

RECOMMENDED INSTALLATION PATTERN

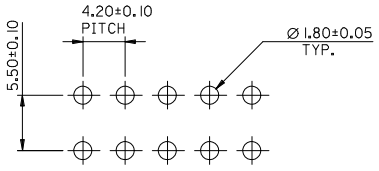

RECOMMENDED P.C.B. LAYOUT

NOTES

1. MATERIAL - HEADER : NYLON 46, UL94V-0, COLOR BEIGE
   PIN : BRASS (1.07 SQUARE)
2. PLATING OF PIN
   TIN 2.54um MIN. OVER NICKEL 1.27um MIN.
3. PLATING OF PIN
   TIN 4-10um OVER COPPER 2-8um.
4. PLATING OF PIN
   TIN 2.54μm MIN. OVER NICKEL 1.27μm MIN. WITH MATT FINISH.
5. PART NUMBERS 36633-0020 TO 36633-0024 & 36633-0040 TO 36633-0046 INCLUDED AS SHOWN IN TABLE 'X'.

CORRECT TOLERANCE
EC NO: UCP2010-0395 2010/04/09
DRWN: JAGUILAR 1995/03/01
CH'KD: EDMUD 2010/04/09
APPR: FSMITH 2010/04/09
DESCRIPTION
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)


	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS


DIMENSION STYLE: MM ONLY	SCALE: 2:1	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: STEVEN DATE: 1995/02/27	TITLE: 4.2MM W-T-B HIGH TEMP. RIGHT ANGLE HEADER WITHOUT MOUNTING FLANGES		
CHECKED BY: EDMUD DATE: 1995/03/01			
APPROVED BY: FSMITH DATE: 2010/04/09	MOLEX INCORPORATED		
MATERIAL NO.: SEE CHART	DOCUMENT NO.: SD-87427-**0*		SHEET NO.: 1 OF 2

SIZE A3


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION




CKT. SIZE 14




CKT. SIZE 12




CKT. SIZE 16




CKT. SIZE 10



CKT. SIZE 18




CKT. SIZE 8



CKT. SIZE 20




CKT. SIZE 6



CKT. SIZE 22



CKT. SIZE 4



CKT. SIZE 24



CKT. SIZE 2

SEE NOTES 4 ON SHEET 1 FOR PLATING DETAILS				
	51.60	46.20	36633-0046	24
	47.40	42.00	36633-0045	22
	43.20	37.80	36633-0024	20
	39.00	33.60	36633-0044	18
	34.80	29.40	36633-0023	16
	30.60	25.20	36633-0043	14
	26.40	21.00	36633-0022	12
	22.20	16.80	36633-0021	10
	18.00	12.60	36633-0042	8
	13.80	8.40	36633-0041	6
	9.60	4.20	36633-0020	4
	5.40	--	36633-0040	2
PIN (OUTSIDE & INSIDE)	B	A	ENG. NO.	CKT. SIZE

TABLE 'X'

51.60	46.20	87427-242*	24
B	A	ENG. NO. TUBE PACKED	CKT. SIZE
51.60	46.20	87427-240*	24
47.40	42.00	87427-220*	22
43.20	37.80	87427-200*	20
39.00	33.60	87427-180*	18
34.80	29.40	87427-160*	16
30.60	25.20	87427-140*	14
26.40	21.00	87427-120*	12
22.20	16.80	87427-100*	10
18.00	12.60	87427-080*	8
13.80	8.40	87427-060*	6
9.60	4.20	87427-040*	4
5.40	--	87427-020*	2
B	A	ENG. NO. TRAY PACKED	CKT. SIZE

EC NO: I2009-0573 2009/11/11
DRWN:HMR01 2009/11/12
CHKD:KPRASAD 2009/11/13
APPR:KPRASAD
DESCRIPTION
REV E

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: SAMC DATE: 1996/02/05
CHECKED BY: DATE:
APPROVED BY: DATE:

TITLE: 4.2MM W-T-B,HIGH TEMP. RIGHT ANGLE HEADER WITHOUT MOUNTING FLANGES

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-87427-**0*
SHEET NO.: 2 OF 2
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION